

**Style No. CNLT04**

Flush Mount with Alabaster Diffuser



**SPECIFICATIONS:**

Bulb Base Size: NA

Bulb Type: LED AC BOARD

Junction Box Orientation: Ceiling

Junction Box Size: Standard 4: Octagon

Max Wattage: 25 Watt

Orientation: Ceiling Only

Shade Material: Alabaster

Voltage: 120

Required Electrical Feeds:

UL: Black "Hot" wire; White "Neutral" wire; Green or Bare "Ground" wire

**IMPORTANT:**


- **WARNING:** The power supply must be turned off prior to installation. Turn off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is not sufficient.
- To ensure this product is installed properly, you must read and follow these guidelines.
- The owner/user of this product must keep this information for future reference.
- CNLT04 is U.L. certified and are suitable for damp or dry locations. The U.L. listing mark can be found on the inside of the cover plate.
- Be sure your installation conforms to all federal, state, and local codes.
- This product must be installed by a professional licensed electrical contractor.
- Refer to the specification and assembly drawings attached. Product is sold partially assembled but shown fully disassembled for illustrative and service purpose only.
- Max wattage for CNLT04 is 25 watts for LED Dedicated board.

These guidelines have been prepared for the professional contractor to aid in the installation of:  
**HENRY CHRONOS CEILING MOUNTED FLUSH MOUNT WITH ALABASTER DIFFUSER (STYLE No. CNLT04)**  
All dimensions are based on original specification and are subject to change and variation.  
Please consult your Design Associate for current specifications.

**W A T E R W O R K S**

## CNLT04 FLUSH MOUNT INSTALLATION:

- **REQUIRED:** Install a Junction Box in the desired location on the ceiling.
- See Figure - 01 for Steps 1 - 6.

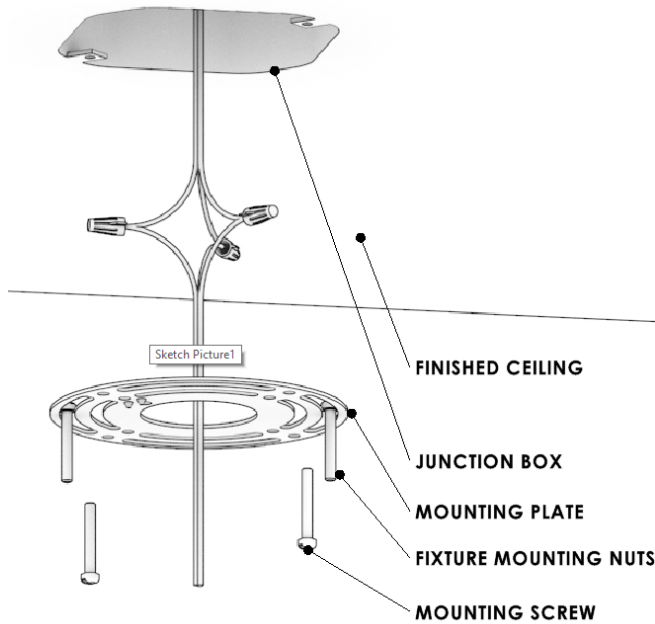


**FIGURE – 01**

1. Remove the MOUNTING PLATE by unthreading the MOUNTING NUTS from the FIXTURE MOUNTING SCREW from the FIXTURE BODY.
2. Pull the wires from the light through the center of the MOUNTING PLATE.
3. Fasten the bare copper fixture wire to the green or bare copper wire in the box with a wire nut or fasten it to the MOUNTING PLATE with the ground screw provided.
4. Fasten the white fixture wire to the white wire in the box with a wire nut. Tightly wrap the connection with electrical tape beginning 1" [25mm] below the wire nut to ensure the tape seals the end of the nut. Make sure that there are no exposed wires that could cause a short circuit.
5. Repeat previous step with the black fixture wire and the black wire from the junction box. Make sure the wires are pushed into the junction box.

6. Attach the MOUNTING PLATE to the JUNCTION BOX using the MOUNTING SCREWS making sure to keep the proper alignment of the plate.

- See Figure - 02 for Step 7-8.

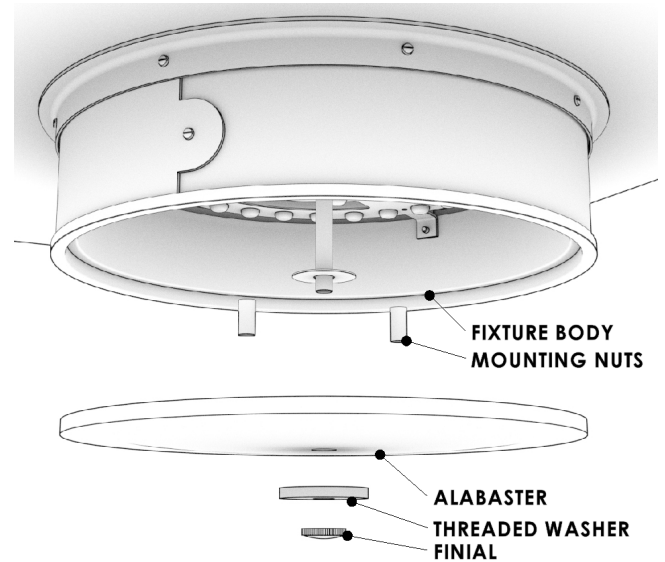

**FIGURE – 02**

7. Use the MOUNTING NUTS to secure the FIXTURE BODY to the ceiling with the FIXTURE MOUNTING SCREWS.
  8. Lift up the ALABASTER and screw on the THREADED WASHER and FINIAL
- If further assistance is required, please contact Product Support at 1-800-927-2120 (8am-6pm EST).

These guidelines have been prepared for the professional contractor to aid in the installation of:  
**HENRY CHRONOS CEILING MOUNTED FLUSH MOUNT WITH ALABASTER DIFFUSER (STYLE No. CNLT04)**  
All dimensions are based on original specification and are subject to change and variation.  
Please consult your Design Associate for current specifications.

# WATERWORKS