

BOULEVARD

Boulevard Wall Mounted Tub Spout

BD82TS



SHOWN IN BOULEVARD WALL MOUNTED TUB SPOUT| BDTS82

TECHNICAL DETAILS

Adjustable versus Fixed Spray: Fixed Spray
Fittings Hole Diameter: 64 mm
Depth / Width: 216 mm
Height: 64 mm
Inlet Connection Size: 3/4"
Inlet Connection Type: Male G/BSPP
Installation Type: Wall Mounted
Length: 64 mm
Primary Material: Brass
Spout Reach: 20"
Spout Swivel: N
Suggested Application: Bath
Water Pressure Maximum: 5.5 bar
Water Pressure Minimum: 1.5 bar
Water Pressure Recommended: 3.0 bar

INSPIRATION

Inspiration from 1930s objects evokes extravagance: a strong silhouette, lavish scale and elegant decoration. Machine and artisan hands yield crisp details and curves.

CODES & STANDARDS

Code # : ASME A112.18.1, CSA B125, IAPMO, State of MA

PRODUCT FEATURES

Brass metal is used for all accessory components

The manufacturing process encompasses casting, turning, forging, hand-fitting and hand polishing.

Solidly sized and generous in scale, decorative elements convey a sense of substance.


WATERWORKS

BOULEVARD


BD82TS

Boulevard Wall Mounted Tub Spout


ADAPTER(S) PACKAGED SEPARATELY		
ADAPTER	DESCRIPTION	QTY
UNUK06	$\frac{3}{4}$ " NPT Male x $\frac{3}{4}$ " Male Nipple 50mm Long BSP	1

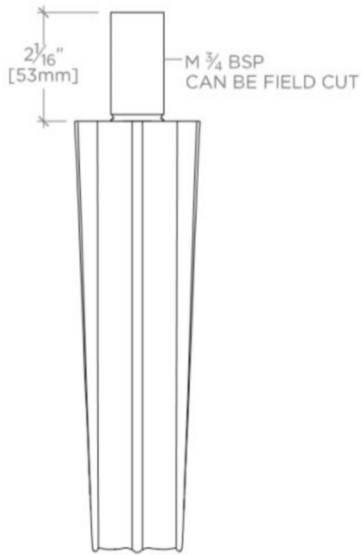

TOP VIEW SCALE: 3"=1'-0"



FRONT VIEW SCALE: 3"=1'-0"

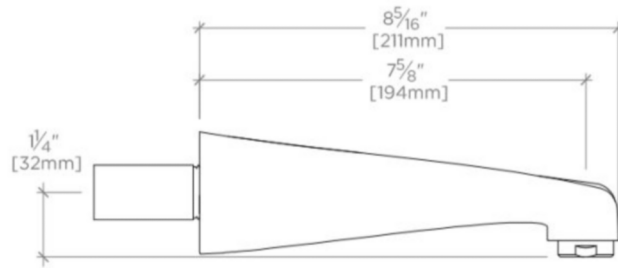

SIDE VIEW SCALE: 3"=1'-0"