

UNIVERSAL

Universal 6" Rain Shower Head

UNSH29



SHOWN IN UNIVERSAL 6" RAIN SHOWER HEAD | UNSH29

TECHNICAL DETAILS

ADA Compliance: Yes
Diameter of Head: 6"
Flow Restriction Options: 2.0, 1.75, 1.5
Depth / Width: 5 15/16"
Height: 3 3/16"
Inlet Connection Size: 1/2"
Inlet Connection Type: Female NPT
Integrated Diverter: N
Length: 5 15/16"
Primary Material: Brass
Suggested Application: Bath
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Our Universal collection features timeless designs complementing any of our Waterworks. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

CODES & STANDARDS

Code # WWSH29: Complies with ASME A112.18.1/CSA B125.1, CEC and 0.25% Weighted Average Lead Content. Certified with IAPMO, cUPC, CEC, DOE, State of MA, WaterSense and WRAS.

PRODUCT FEATURES

Shower arms can be partnered with a variety of shower heads (sold separately): 6" rain head, 4 1/2" shower rose, or 2 3/4" shower head with adjustable spray.

Made of Brass

Compatible With 3 Sizes of Shower Head

Stocked in 2.0gpm (7.6 L/min) and 1.75gpm (6.6 L/min). State of California requires 1.75gpm (6.6 L/min) to comply with their water conservation requirements. Other flow options are available to order, contact your sales associate


CERTIFICATIONS




UNIVERSAL

Universal 6" Rain Shower Head


UNSH29



FACE VIEW SCALE: 3"=1'-0"



FRONT VIEW SCALE: 3"=1'-0"

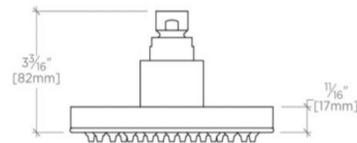

SIDE VIEW SCALE: 3"=1'-0"