

ISLA

IS3T05

Isla Three Way Diverter Valve Trim for Thermostatic System with Metal Geode Handle



SHOWN IN ISLA THREE WAY DIVERTER VALVE TRIM FOR THERMOSTATIC SYSTEM WITH METAL GEODE HANDLE | IS3T05

TECHNICAL DETAILS

Control Valve Rough-in Depth Maximum: 5 3/8"
Control Valve Rough-in Depth Minimum: 3 1/8"
Escutcheon Primary Material: Brass
Fittings Hole Diameter: 2 1/2"
Depth / Width: 3 3/16"
Height: 4 1/2"
Length: 4 3/8"
Suggested Application: Bath

INSPIRATION

Pure, timeless, unique and versatile - sculptural organic forms meet advanced engineering in this inspiring collection of fittings, hardware and accessories.

PRODUCT FEATURES

Features faceted Geode Handle

For use with a Thermostatic shower system and three waterway outlets such as a handshower, shower head, or tub spout

Requires the Three Way Diverter Valve Rough with Shutoff: US: GUDV66 and UK: GU66DV


Stocked in Nickel, Unlacquered Brass, Burnished Nickel, and Burnished Brass finishes



ISLA

IS3T05


Isla Three Way Diverter Valve Trim for Thermostatic System with Metal Geode Handle

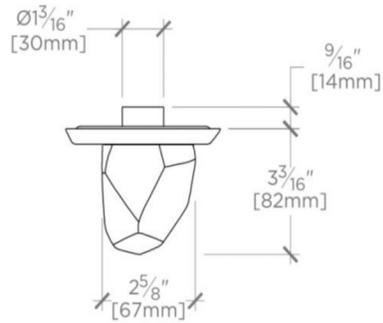


TOP VIEW SCALE: 3"=1'-0"



ISO VIEW SCALE: 3"=1'-0"



FRONT VIEW SCALE: 3"=1'-0"

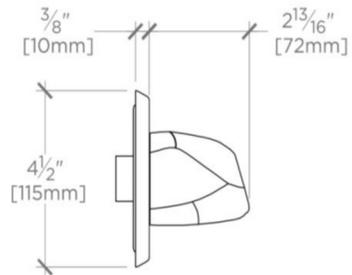

SIDE VIEW SCALE: 3"=1'-0"