

.25

.25 Floor Mounted Tub Spout

PTTS28



SHOWN IN .25 FLOOR MOUNTED TUB SPOUT | PTTS28

TECHNICAL DETAILS

Adjustable versus Fixed Spray: Fixed Spray
Escutcheon Primary Material: Brass
Fittings Hole Diameter: 1 1/4"
Depth / Width: 10 5/8"
Height: 30"
Inlet Connection Size: 3/4"
Inlet Connection Type: Copper Sweat
Installation Type: Freestanding
Length: 3 1/2"
Primary Material: Brass
Spout Swivel: N
Suggested Application: Bath
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

.25 is the ultimate in utilitarian elegance: A simple and understated design that is equally functional and beautiful.

CODES & STANDARDS

Code # PTU28: State of MA

PRODUCT FEATURES

Works seamlessly with Waterworks' thermostatic or diverter shower systems
Unrestricted flow of approximately 12 gallons per minute (GPM)




.25

PTTS28


.25 Floor Mounted Tub Spout



TOP VIEW SCALE: 1/2"=1'-0"



FRONT VIEW SCALE: 1/2"=1'-0"

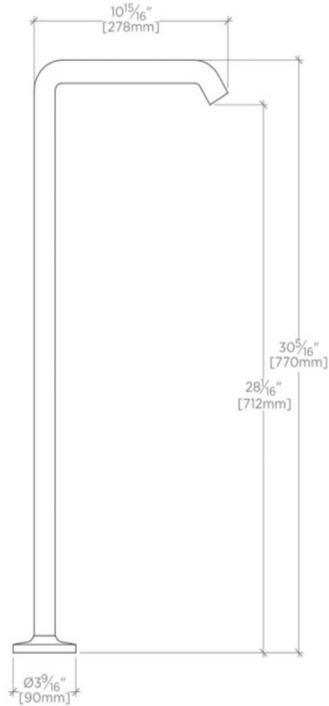

SIDE VIEW SCALE: 1/2"=1'-0"