

HENRY

Henry Wall Mounted Tub Spout

HNTS80



SHOWN IN HENRY WALL MOUNTED TUB SPOUT | HNTS80

TECHNICAL DETAILS

Adjustable versus Fixed Spray: Fixed Spray
Escutcheon Primary Material: Brass
Fittings Hole Diameter: 1 1/4"
Depth / Width: 7 1/16"
Height: 2 7/8"
Inlet Connection Size: 1/2"
Inlet Connection Type: Female NPT
Installation Type: Wall Mounted
Integrated Diverter: N
Integrated Spray: N
Length: 2 7/8"
Number of Holes: One Hole
Pivot: N
Primary Material: Brass
Spout Swivel: N
Spray Included in Unit: N
Suggested Application: Bath
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Influenced by the connection of industry and art Henry easily transitions between modern, traditional, utilitarian and classic settings.

CODES & STANDARDS

Code # HNTU80X: Complies with ASME A112.18.1/CSA B125.1, ASTM E 1621-05. Certified with IAPMO, cUPC & State of MA

PRODUCT FEATURES


The manufacturing process encompasses casting, turning, forging, hand-fitting and hand polishing. Brass material is used for components




HENRY

Henry Wall Mounted Tub Spout


HNTS80



TOP VIEW SCALE: 3"=1'-0"



FRONT VIEW SCALE: 3"=1'-0"

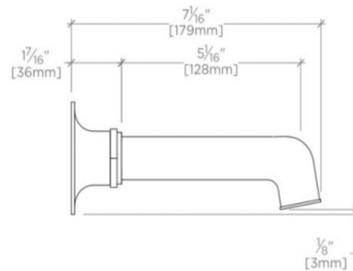

SIDE VIEW SCALE: 3"=1'-0"