
WATERWORKS

OPUS OPTF91

Opus Deck Mounted Low Profile Concealed Tub Filler with Metal Handshower and Metal Lever Handles

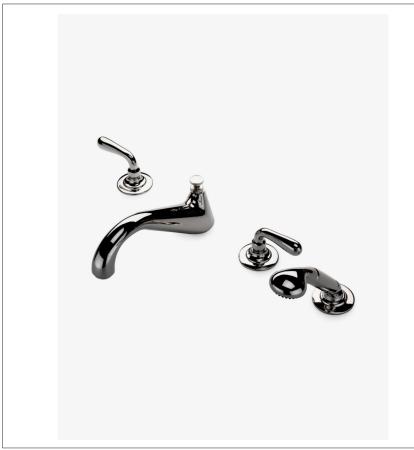

SHOWN IN OPUS DECK MOUNTED LOW PROFILE CONCEALED TUB FILLER WITH METAL HANDSHOWER AND METAL LEVER

TECHNICAL DETAILS

ADA Compliance: No Adjustable versus Fixed Spray: Fixed Spray Deck Thickness Maximum: 3' Deck Thickness Minimum: 1/8" Diameter of Head: 2" Escutcheon Primary Material: Brass Fittings Hole Diameter: 1 3/8" Flow Restriction Options: 2.0, 1.75, 1.5, 0.92 Handle Spread Maximum: 12" Handle Spread Minimum: 10" Handle Turn Angle: Quarter Turn Handshower / Spray Hose Length: 79" Depth / Width: 12" Height: 7" Inlet Connection Size: 3/4" Inlet Connection Type: Male NPT Adapter Inlet Supply Spread Maximum: 12" Inlet Supply Spread Minimum: 10" Installation Type: Deck Mounted Integrated Diverter: N Length: 18" Number of Handles: Two Number of Holes: Four Hole Pivot: N Primary Material: Brass Restricted Maximum Flow Rate: 2.5 gpm Spout Swivel: N Suggested Application: Bath Valve Material: ceramic Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

INSPIRATION

Opus incorporates a range of sophisticated aesthetic notes, with graceful curves that create a jewel-like refinement.

CODES & STANDARDS

Code # OPTU90: ASME A112.18.1, CSA B125

PRODUCT FEATURES

Brass material is used for trim and valve component parts.

The manufacturing process encompasses casting, turning, stamping, hand-fitting and hand polishing. Eased curves and reflective forms carry the message of cleanliness and clarity.

Stocked in 2.5gpm (9.5 L/min) and 1.75gpm (6.6 L/min). State of California requires 1.75gpm (6.6 L/min) to comply with their water conservation requirements. Other flow options are available to order, contact your sales associate or call 1 (800) 899-6757 for details.









OPUS OPTF91

Opus Deck Mounted Low Profile Concealed Tub Filler with Metal Handshower and Metal Lever Handles

