

BOND

BXT37C

Bond Union Series Floor Mounted Exposed Tub Filler with Handshower and Guilloche Link Lever Handles



TECHNICAL DETAILS

ADA Compliance: When installed per ADA guidelines
 Diameter of Legs / Tubes: 1 1/4"
 Fittings Hole Diameter: 1 3/8"
 Handle Spread Maximum: 8"
 Handle Spread Minimum: 8"
 Handle Turn Angle: Quarter Turn
 Handshower / Spray Hose Length: 59"
 Inlet Connection Size: 3/4"
 Inlet Connection Type: Sweat
 Inlet Supply Spread Maximum: 12 5/16"
 Inlet Supply Spread Minimum: 12 5/16"
 Integrated Diverter: Y
 Number of Holes: Two Hole
 Primary Material: Brass
 Spout Swivel: N
 Spray Included in Unit: Y
 Valve Material: Ceramic
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

The Bond Collection: Modern bath designs infused with rare soul and artistry. Explore a range of statement-making elements: fittings, washstands, mirrors and more.

PRODUCT FEATURES

Lever Handles

Diverter handle allows bather to move water from spout to handshower. Handshower features 2-1/8" head with rubber nozzles.

Features Guilloche Link Pattern Handle


Stocked in Nickel and Brass

Unrestricted flow for tub spout. Handshower available in 1.75gpm (6.6L/min) flow rate

BOND

BXT37C

Bond Union Series Floor Mounted Exposed Tub Filler with Hand-shower and Guilloche Link Lever Handles

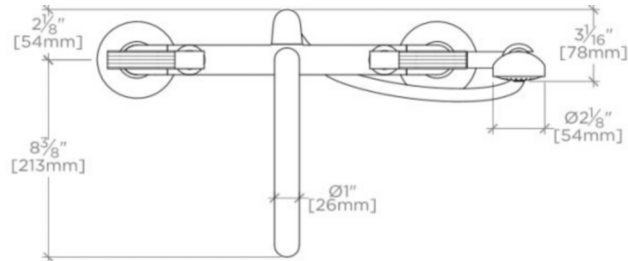

TOP VIEW

SCALE: $1\frac{1}{2}"=1'-0"$

