

UNIVERSAL

Universal Spray Bar

UNBS76



SHOWN IN UNIVERSAL SPRAY BAR| UNBS76

TECHNICAL DETAILS

Adjustable versus Fixed Spray: Fixed Spray
Diameter of Head: 1 3/16"
Escutcheon Primary Material: Brass
Fittings Hole Diameter: 1 1/2"
Handshower / Spray Hose Length: 59"
Depth / Width: 3 3/4"
Height: 24"
Inlet Connection Size: 1/2"
Inlet Connection Type: Female NPT
Installation Type: Wall Mounted
Integrated Diverter: N
Length: 2 1/2"
Pivot: N
Primary Material: Brass
Restricted Maximum Flow Rate: 2.5 gpm
Suggested Application: Bath
Water Pressure Maximum: 75.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Our Universal collection features timeless designs complementing any of our Waterworks. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

CODES & STANDARDS

Code # AESH76: ASME A112.18.1, CSA B125, IAPMO, State of MA, CEC

PRODUCT FEATURES


Invigorating streams of water are delivered through 18 spray jets
Flow rate regulated at 2.5 gallons per minute (gpm)




WATERWORKS

UNIVERSAL Universal Spray Bar


UNBS76



TOP VIEW SCALE: 3"=1'-0"

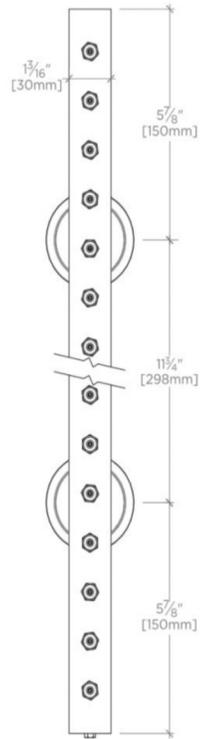

FRONT VIEW SCALE: 3"=1'-0"

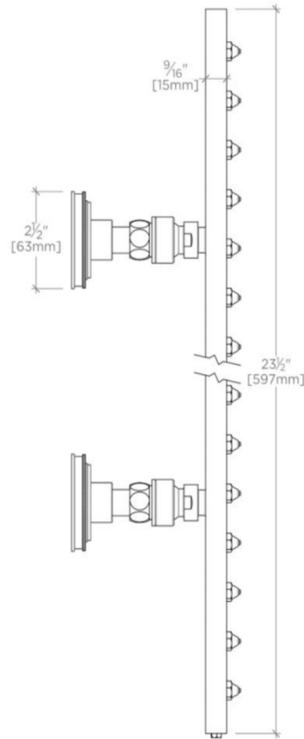

SIDE VIEW SCALE: 3"=1'-0"