
# WATERWORKS

HENRY HNLS21

Henry Gooseneck Three Hole Deck Mounted Lavatory Faucet with Teak Cylinders and Metal Cross Handles

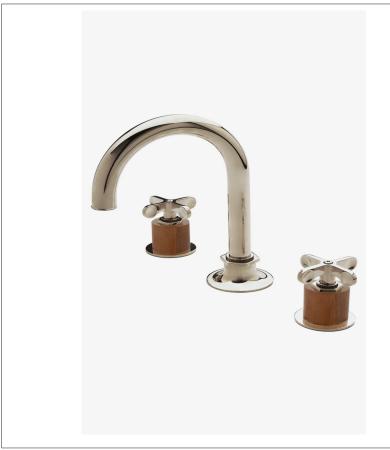

### SHOWN IN HENRY GOOSENECK THREE HOLE DECK MOUNTED LAVATORY FAUCET WITH TEAK CYLINDERS AND METAL

## TECHNICAL DETAILS

Adjustable versus Fixed Spray: Fixed Spray
Deck Thickness Maximum: 1 5/8"
Deck Thickness Minimum: 3/16"
Drain Depth Maximum: 2 5/8"
Drain Hole Diameter: 1 3/4"
Escutcheon Primary Material: Brass
Fittings Hole Diameter: 1 1/4"

Flow Restriction Options: 1.0 , 1.2 , 1.5 , 1.75, 2.2

Handle Spread Maximum: 12" Handle Spread Minimum: 8" Handle Turn Angle: Quarter Turn Depth / Width: 7 13/16" Drain Depth Minimum: 3/8" Height: 9"

Inlet Connection Size: 1/2"

Inlet Connection Type: Male with Supply Nut Inlet Supply Spread Maximum: 12"

Inlet Supply Spread Minimum: 8" Installation Type: Deck Mounted Integrated Diverter: N

Integrated Spray: N Number of Handles: Two Number of Holes: Three Hole Primary Material: Brass Spout Swivel: N

Spray Included in Unit: N Suggested Application: Bath Valve Material: Ceramic

Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

#### **INSPIRATION**

Influenced by the connection of industry and art Henry easily transitions between modern, traditional, utilitarian and classic settings.

#### **CODES & STANDARDS**

Code # HNLS21X: Complies with ASME A112.18.1/CSA B125.1, ASME A112.18.2 / CSA B125.2, NSF, CEC 61, ADA and 0.25% Weighted Average Lead Content. Certified with IAPMO, cUPC, NSF, CEC and State of MA.

#### **PRODUCT FEATURES**

Teak is an organic, natural hardwood originating from Southeast Asia

The manufacturing process encompasses casting, turning, forging, hand-fitting and hand polishing. Standard flow rate is 2.2gpm (8.3 L/min) and State of California requires 1.2gpm(4.5 L/min). Also available in other flow options. Contact a sales associate for details.

#### **CERTIFICATIONS**



HENRY HNLS21

Henry Gooseneck Three Hole Deck Mounted Lavatory Faucet with Teak Cylinders and Metal Cross Handles

