

.25

PTTF43

.25 Deck Mounted Low Profile Concealed Tub Filler with Metal Cross Handles



SHOWN IN .25 DECK MOUNTED LOW PROFILE CONCEALED TUB FILLER WITH METAL CROSS HANDLES| PTF43

TECHNICAL DETAILS

ADA Compliance: Yes
 Adjustable versus Fixed Spray: Fixed Spray
 Deck Thickness Maximum: 3"
 Deck Thickness Minimum: 0"
 Escutcheon Primary Material: Brass
 Fittings Hole Diameter: 1 3/8"
 Handle Spread Maximum: 12"
 Handle Spread Minimum: 10"
 Handle Turn Angle: Quarter Turn
 Depth / Width: 11 1/2"
 Height: 5"
 Inlet Connection Size: 3/4"
 Inlet Connection Type: Male NPT
 Inlet Supply Spread Maximum: 12"
 Inlet Supply Spread Minimum: 10"
 Installation Type: Deck Mounted
 Integrated Diverter: N
 Length: 12 3/8"
 Number of Handles: Two
 Number of Holes: Three Hole
 Pivot: N
 Primary Material: Brass
 Spout Swivel: N
 Suggested Application: Bath
 Valve Material: Ceramic
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

.25 is the ultimate in utilitarian elegance: A simple and understated design that is equally functional and beautiful.

CODES & STANDARDS

Code # PTTU43: ASME A112.18.1 / CSA B125.1

PRODUCT FEATURES


Pairs perfectly with a wide variety of bathtubs
 Unrestricted flow of approximately 12 gallons per minute (GPM)
 Distinctive metal cross handles




.25

PTTF43


.25 Deck Mounted Low Profile Concealed Tub Filler with Metal Cross Handles



TOP VIEW SCALE: 1 1/2"=1'-0"

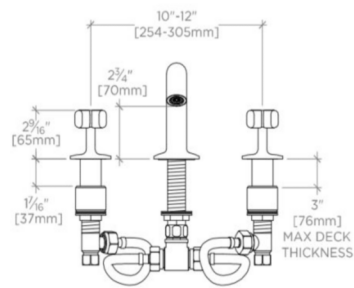

FRONT VIEW SCALE: 1 1/2"=1'-0"

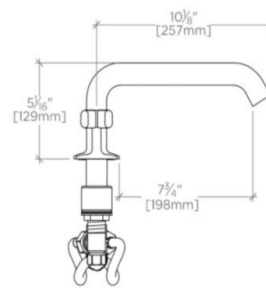

SIDE VIEW SCALE: 1 1/2"=1'-0"