
WATERWORKS

ASTORIA ATTF40

Astoria Low Profile Concealed Tub Filler With Handshower and Metal Lever Handles

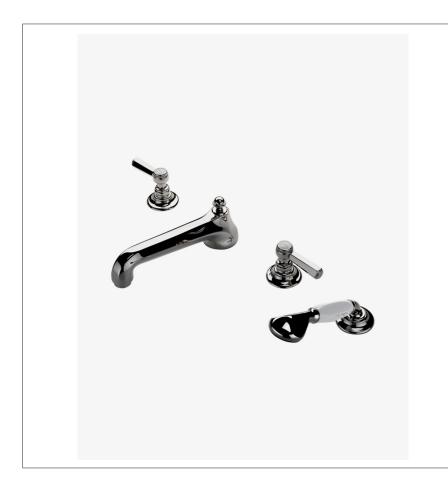

TECHNICAL DETAILS

ADA Compliance: No Adjustable versus Fixed Spray: Fixed Spray Deck Thickness Maximum: 1 7/8" Deck Thickness Minimum: 0" Diameter of Head: 2" Escutcheon Primary Material: Brass Fittings Hole Diameter: 1 3/8" Flow Restriction Options: 2.0, 1.75, 1.5, 0.92 Handle Spread Maximum: 12" Handle Spread Minimum: 10" Handle Turn Angle: Quarter Turn Handshower / Spray Hose Length: 79" Index Color / Finish and Material: White Porcelain Depth / Width: 10 1/2" Height: 5 1/2" Index Marking: Hot/Cold Inlet Connection Size: 3/4" Inlet Connection Type: Male NPT Adapter Inlet Supply Spread Maximum: 12" Inlet Supply Spread Minimum: 10" Installation Type: Deck Mounted Integrated Diverter: N Length: 20" Number of Handles: Two Number of Holes: Four Hole Pivot: N Primary Material: Brass Restricted Maximum Flow Rate: 2.5 gpm Spout Swivel: N Suggested Application: Bath Valve Material: Ceramic Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

INSPIRATION

Astoria is dignified tradition. Firmly grounded in the 1930's, the design is an eclectic mix of distinctive geometric profiles, generous scale, and elegant design.

CODES & STANDARDS

Code # JUTU40:

PRODUCT FEATURES

Brass material is used for all trim and valve component parts.

The signature hexagonal lever draws inspiration from the linear sophistication of the 1930's.

A comprehensive product line of fittings options for the lavatory, shower, and bathtub.

Standard flow rate is 2.5gpm for handshower only. Also available in high efficient flow options. Contact your sales associate or call 1 (800) 899-6757 for details.









ASTORIA ATTF40

Astoria Low Profile Concealed Tub Filler With Handshower and Metal Lever Handles

