

WATERWORKS

PRODUCT SUPPORT
800.927.2120
WATERWORKS.COM

AERO

Low Profile Concealed Tub Filler With
Handshower and Metal Lever Handles in
Chrome

STYLE No. 266611

REFERENCE No. AETU89C

ITEM No. 09-47014-05547

SPECIFICATIONS

PAGE 1 OF 3

DESIGN

Inspired by the stepped detail of 19th century telescopes, Aero is a combination of historical reference with a contemporary temperament. The result is original and modern, bringing a look of updated elegance to the bathroom.

FEATURES

Brass metal is used for all trim and valve components.

Optional materials for handles include ebony and semi-precious stones.

The manufacturing process encompasses casting, turning, forging, hand-fitting and hand polishing.

The signature gad-rooning detail on the escutcheon is used throughout the entire range.

An extensive range of fittings and accessory options for the lavatory, shower, and bathtub.



SHOWN IN Nickel

WATERWORKS

PRODUCT SUPPORT
800.927.2120
WATERWORKS.COM

AERO

Low Profile Concealed Tub Filler With
Handshower and Metal Lever Handles in
Chrome

STYLE No. 266611


REFERENCE No. AETU89C

ITEM No. 09-47014-05547

SPECIFICATIONS

PAGE 2 OF 3

All dimensions are based on original specifications and are subject to change and variation. Please consult your Design Associate for current specifications.

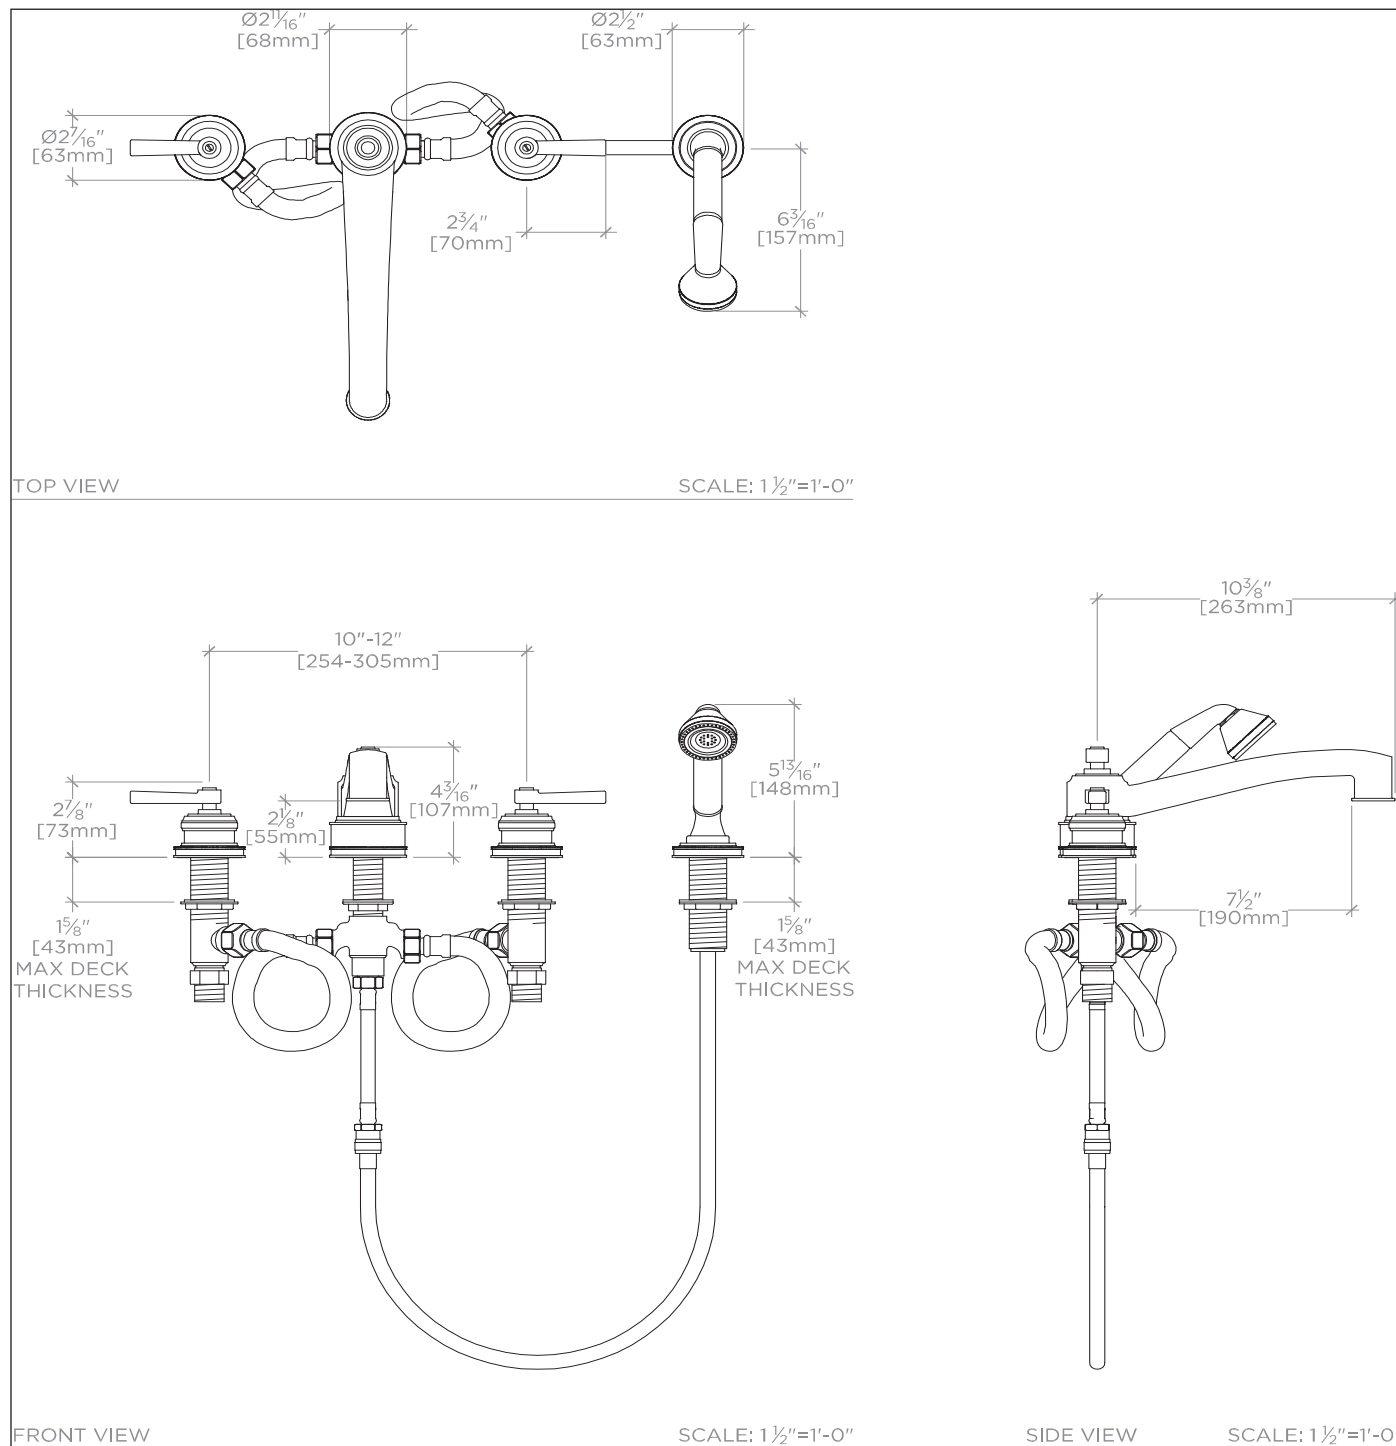

WATERWORKS

PRODUCT SUPPORT
800.927.2120
WATERWORKS.COM

AERO

Low Profile Concealed Tub Filler With
Handshower and Metal Lever Handles in
Chrome

STYLE No. 266611

REFERENCE No. AETU89C

ITEM No. 09-47014-05547

SPECIFICATIONS

PAGE 3 OF 3

SPECIFICATIONS

Primary Material: Brass
Handle Spread Maximum:
Handle Spread Minimum: 10"
Inlet Connection Size: $\frac{3}{4}$ "
Inlet Connection Type: Male NPT
Inlet Supply Spread Maximum:
Inlet Supply Spread Minimum: 10"
Maximum Deck Thickness: $1\frac{5}{8}$ "
Minimum Deck Thickness: 0"
Maximum Water Pressure: 75 psi
Minimum Water Pressure: 20 psi
Fittings Hole Diameter: $1\frac{3}{8}$ "
Recommended Water Pressure: 45 psi

CARE INSTRUCTIONS

To clean the finish, wipe gently with a soft
damp cloth and then with a soft dry towel.
A mild soap solution can be used for daily
cleaning.

CODES AND STANDARDS

ASME A112.18.1, CSA B125, IAPMO, State of
MA

FLOW RATE CURVE

REQUIRED PLUMBING DETAILS

Below is a list of choices that must be
made to complete your lavatory faucet.