

.25

PTTS82

.25 Wall Mounted Tub Spout



SHOWN IN .25 WALL MOUNTED TUB SPOUT| PTTS82

TECHNICAL DETAILS

Adjustable versus Fixed Spray: Fixed Spray
Escutcheon Primary Material: Brass
Fittings Hole Diameter: 32 mm
Depth / Width: 232 mm
Height: 73 mm
Inlet Connection Size: 3/4"
Inlet Connection Type: Copper Sweat
Installation Type: Wall Mounted
Length: 67 mm
Primary Material: Brass
Spout Reach: 8 5/8"
Spout Swivel: N
Suggested Application: Bath
Water Pressure Maximum: 6.0 bar
Water Pressure Minimum: 1.5 bar
Water Pressure Recommended: 3.0 bar

INSPIRATION

.25 is the ultimate in utilitarian elegance: A simple and understated design that is equally functional and beautiful.

CODES & STANDARDS

Code # PTTU82: ASME A112.18.1 / CSA B125.1, IAPMO, State of MA

PRODUCT FEATURES

Works seamlessly with Waterworks' thermostatic or diverter shower systems
Unrestricted flow of approximately 12 gallons per minute (GPM)


CERTIFICATIONS



.25

PTTS82

.25 Wall Mounted Tub Spout

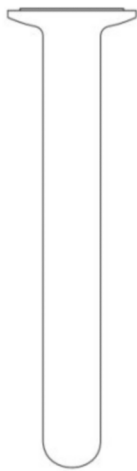

TOP VIEW SCALE: 3"=1'-0"



FRONT VIEW SCALE: 3"=1'-0"



SIDE VIEW SCALE: 3"=1'-0"