

## ETOILE

## ETXS57

Etoile Exposed Thermostatic System with 4 1/2" Shower Rose and Tub Filler and White Porcelain Lever Handle



SHOWN IN ETOILE EXPOSED THERMOSTATIC SYSTEM WITH 4 1/2" SHOWER ROSE AND TUB FILLER AND WHITE PORCELAIN

### TECHNICAL DETAILS

ADA Compliance: Yes  
Adjustable versus Fixed Spray: Fixed Spray  
Assembly / Configuration: Completely Assembled  
Diameter of Head: 4 1/2"  
Escutcheon Primary Material: Brass  
Fittings Hole Diameter: 1 3/8"  
Handle Turn Angle: Quarter Turn  
Depth / Width: 15"  
Height: 60"  
Inlet Connection Size: 3/4"  
Inlet Connection Type: Female NPT  
Inlet Supply Spread Maximum: 10 1/4"  
Inlet Supply Spread Minimum: 10 1/4"  
Installation Type: Wall Mounted  
Integrated Diverter: Y  
Length: 12 1/2"  
Number of Handles: Two  
Pivot: Y  
Primary Material: Brass  
Restricted Maximum Flow Rate: 2.5 gpm  
Suggested Application: Bath  
Valve Material: Brass  
Water Pressure Maximum: 85.0 psi  
Water Pressure Minimum: 20.0 psi  
Water Pressure Recommended: 45.0 psi

### INSPIRATION

Defined elegance. Etoile has a European sophistication with a timeless sense of chic.

### CODES & STANDARDS

Code # ETSV57: Certified with IAPMO & State of MA. Complies with ASME A112.18.1/CSA B125.1, ANSI 117.1 ADA & ASTM E 1621-05.

### PRODUCT FEATURES

Built in Anti-scald protection.  
Features a swivel 4 1/2" shower rose.  
Allows bather to adjust temperature and volume of shower rose and tub filler.  
Flow rate regulated at 2.5 gallons per minute (gpm).

### CERTIFICATIONS



### PRODUCT (NOTES)


Valve Included

# WATERWORKS


## ETOILE

ETXS57


Etoile Exposed Thermostatic System with 4 1/2" Shower Rose and Tub Filler and White Porcelain Lever Handle

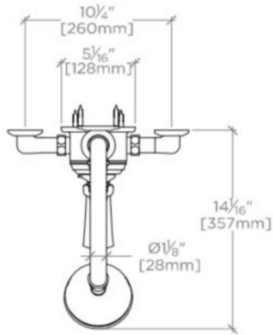

TOP VIEW SCALE: 1"=1'-0"

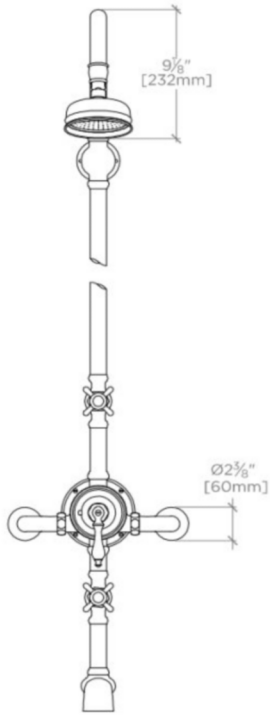

FRONT VIEW SCALE: 1"=1'-0"

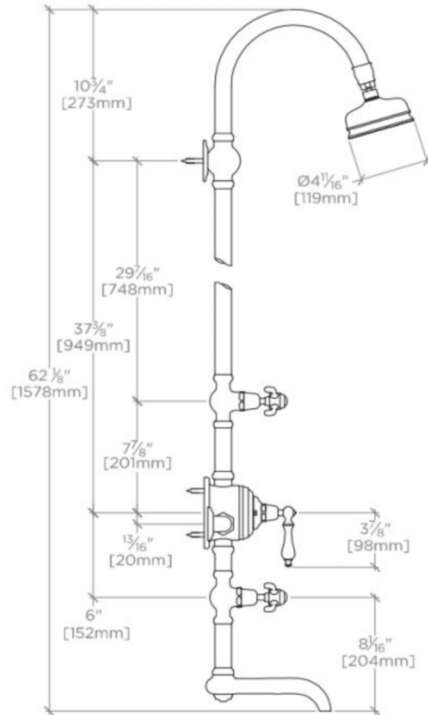

SIDE VIEW SCALE: 1"=1'-0"