

## DASH

DSXS20

Dash Exposed Thermostatic Shower System with 8" Shower Head and Metal Cross Handles



SHOWN IN DASH EXPOSED THERMOSTATIC SHOWER SYSTEM WITH 8" SHOWER HEAD AND METAL CROSS HANDLES]

### TECHNICAL DETAILS

Adjustable versus Fixed Spray: Fixed Spray  
 Diameter of Head: 7 3/4"  
 Diameter of Legs / Tubes: 1 1/8"  
 Escutcheon Primary Material: Brass  
 Fittings Hole Diameter: 1 1/8"  
 Flow Restriction Options: 2.5, 2.0, 1.75, 1.5  
 Handle Spread Maximum: 5 11/16"  
 Handle Spread Minimum: 5 11/16"  
 Handle Turn Angle: Quarter Turn  
 Handshower / Spray Hose Length: 59"  
 Inlet Connection Size: 3/4"  
 Inlet Connection Type: Copper Compression  
 Inlet Supply Spread Maximum: 11 5/8"  
 Inlet Supply Spread Minimum: 11 1/8"  
 Installation Type: Wall Mounted  
 Integrated Diverter: N  
 Integrated Spray: N  
 Number of Handles: Two  
 Number of Holes: Two Hole  
 Pivot: Y  
 Primary Material: Brass  
 Suggested Application: Bath  
 Valve Material: Wax Element  
 Water Pressure Maximum: 85.0 psi  
 Water Pressure Minimum: 20.0 psi  
 Water Pressure Recommended: 45.0 psi

### INSPIRATION

A blend of art and function, Dash pays homage to design elements of the 1930s with pared-down shapes, softened curves and minimal details.

### PRODUCT FEATURES

Features an intergrated thermostatic shut-off valve

The Shower Riser is designed to be field cut to accommodate varying shower heights

Stocked in Nickel, Chrome, Unlacquered Brass, and Matte Nickel finishes


Standard flow rate is 2.5gpm (9.5 L/min). Also available in high efficient flow options. Contact your sales associate or call 1 (800) 899-6757 for details.

# WATERWORKS

## DASH


## DSXS20

Dash Exposed Thermostatic Shower System with 8" Shower Head and Metal Cross Handles

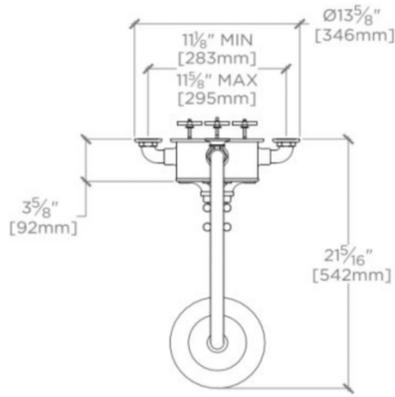


TOP VIEW

SCALE: 3/4"=1'-0"

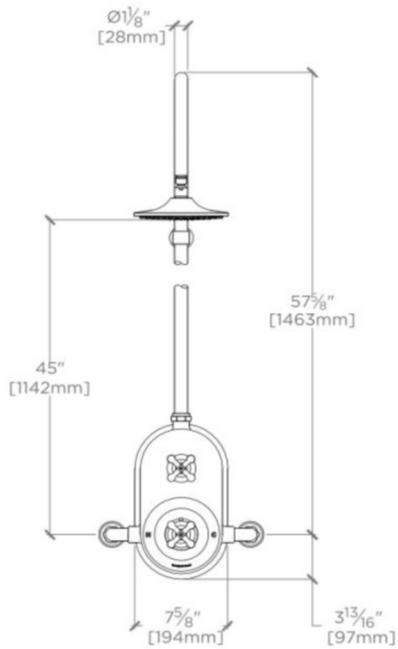

FRONT VIEW

SCALE: 3/4"=1'-0"

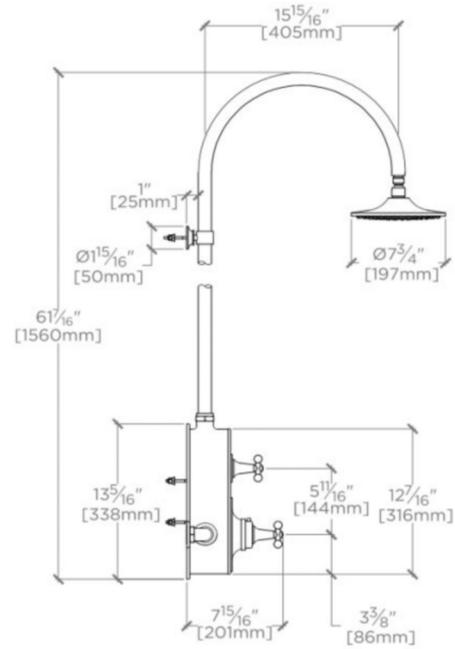

SIDE VIEW

SCALE: 3/4"=1'-0"