




- JUKM12-K** (cross handles)
- JUKM13-K** (metal lever handles)
- JUKM14-K** (white porcelain lever handles)
- JUKM15-K** (black porcelain lever handles- MTO)

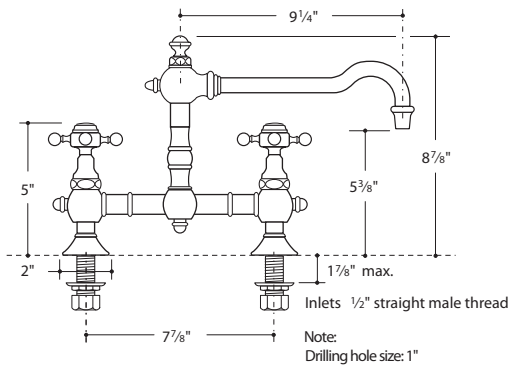

INSTALLATION GUIDELINES

- Use only a protected, smooth-jawed, or strap wrench on any finished surface.
- DO NOT use putty on deck fittings. Upper and lower washers are provided.
- Basin nuts are provided.
- Accepts standard supply tubes or stainless steel flex supplies.
- Check for leaks.
- After installation, unscrew and remove the aerator assembly. Carefully open the hot and cold valves fully to flush out any debris in the supply lines. Once the lines have been flushed, close the valves and reinstall the aerator assembly.
- For servicing valve stem: Pull out index assembly (held in place by friction O-ring), exposing screw for handle. Cover should be hand tight.
- If further assistance is required, please contact Product Support at 1-800-927-2120 (8am-7pm EST).

These guidelines have been prepared for the professional contractor to aid in the installation of:
**JULIA DECK MOUNTED TWO HOLE KITCHEN MIXER(JUKM12-K, JUKM13-K
 JUKM14-K, JUKM15-K)**
 All dimensions are based on original specifications and are subject to change and variation.
 Please consult your Design Associate for current specifications.