

ETOILE

Etoile Gooseneck Concealed Tub Filler With Metal Lever Handles

ETTF44



SHOWN IN ETOILE GOOSENECK CONCEALED TUB FILLER WITH METAL LEVER HANDLES| ETTF44

TECHNICAL DETAILS

ADA Compliance: Yes
 Adjustable versus Fixed Spray: Fixed Spray
 Deck Thickness Maximum: 1 7/8"
 Deck Thickness Minimum: 0"
 Escutcheon Primary Material: Brass
 Fittings Hole Diameter: 1 1/2"
 Handle Spread Maximum: 12"
 Handle Spread Minimum: 10"
 Handle Turn Angle: Quarter Turn
 Depth / Width: 12"
 Height: 11.67575"
 Inlet Connection Size: 3/4"
 Inlet Connection Type: Male NPT Adapter
 Inlet Supply Spread Maximum: 12"
 Inlet Supply Spread Minimum: 10"
 Installation Type: Deck Mounted
 Integrated Diverter: N
 Length: 12 1/2"
 Number of Handles: Two
 Number of Holes: Three Hole
 Pivot: N
 Primary Material: Brass
 Spout Swivel: N
 Suggested Application: Bath
 Valve Material: Ceramic
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

Defined elegance. Etoile has a European sophistication with a timeless sense of chic.

CODES & STANDARDS

Code # ETTU43: Certified with IAPMO, UL & State of MA. Complies with ASME A112.18.1/CSA B125.1, ANSI A117.1 ADA & ASTM E 1621-05.

PRODUCT FEATURES

The gooseneck's lyrical curve provides a fitting complement to the graceful, elongated curves of all pieces in the line.

Optional handle materials include porcelain, wood, crystal, and semi-precious stones.

Unique details include dew-drop cross handles and graceful, elongated curves throughout the line.


An extensive range of fittings, fixture and accessory options for the lavatory, shower, bathtub.




ETOILE

ETTF44


Etoile Gooseneck Concealed Tub Filler With Metal Lever Handles



TOP VIEW SCALE: 1 1/2"=1'-0"

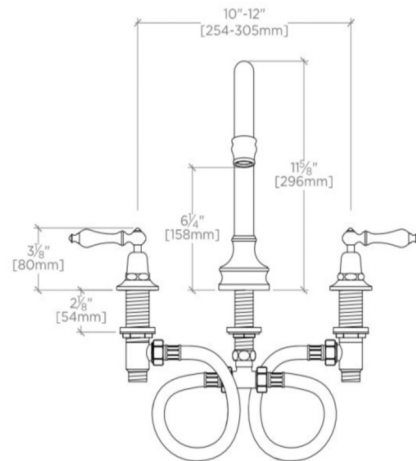

FRONT VIEW SCALE: 1 1/2"=1'-0"

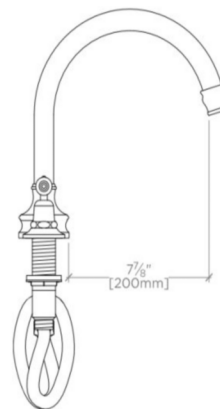

SIDE VIEW SCALE: 1 1/2"=1'-0"