
## WATERWORKS STUDIO


#### WALL MOUNTED SINGLE ARM SCONCE -UL [CE]

# INSTALLATION GUIDELINES


#### Style No. FLLT01 [FL01LT] Flyte Wall mounted single arm sconce

#### Style No. LDLT01 [LD01LT] Ludlow Wall mounted single arm sconce





Style No. RDLT01 [RD01LT] Roadster Wall mounted single arm sconce



Note: All items in [brackets] refer to the UK styles.

#### **SPECIFICATIONS:**

Base Bulb size: Candelabra E-12 [Bayonet B15] Bulb Type: 60 watt max incandescent B10 (not supplied), [40 watt max B15/SBC (not supplied)]

Installation Type: Wall Mounted Junction Box Orientation: Any

Junction Box Size (L X W): 3 " X 3 " Octagonal

Max Wattage: 60 watts [40 watts]

Number of Bulb: One

Required Electrical Feeds: Black or "Hot" lead wire, white or "Neutral" lead wire and a green or bare

copper "Ground" wire.

Voltage: 120 volts [240 volts]

#### **IMPORTANT:**

- WARNING: The power supply must be turned off prior to installation. Turn off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is not sufficient.
- To ensure this product is installed properly, you must read and follow these guidelines.
- The owner/user of this product must keep this information for future reference.
- FLLT01, LDLT01, and RDLT01 are U.L. certified and are suitable for damp or dry locations. The U.L. listing mark can be found on the inside of the cover plate.
- FL01LT, LD01LT, and RD01LT are CE rated. Proof of CE compliance will be provided upon request.
- Be sure your installation conforms to all federal, state, and local codes.
- This product must be installed by a professional licensed electrical contractor.
- Refer to the specification and assembly drawings attached. Product is sold partially assembled but shown fully disassembled for illustrative and service purpose only.
- Max wattage for FLLT01, LDLT01, and RDLT01 is 60 watts for incandescent Candelabra base light bulbs. Max wattage for FL01LT, LD01LT, and RD01LT is 40 watts for Bayonet base light bulbs.

#### **INSTALLATION:**

- REQUIRED: Install a 3 " octagonal electrical junction box at the desired height.
- Remove the MOUNTING PLATE by unthreading the SET SCREW from the back plate.
- 2. Pull the wires in the junction box through the center hole of the mounting plate. Attach the mounting plate to the junction box using the SCREWS making sure to keep the proper alignment of the plate.
- Fasten the bare copper fixture wire to the green or bare copper wire in the box with a wire nut or fasten it to the mounting plate with the ground screw provided.
- Fasten the white fixture wire to the white wire in the box with a wire nut. Tightly wrap the connection with electrical tape beginning 1" [25mm] below the wire nut to ensure the tape seals the end of the nut. Make sure that there are no exposed wires that could cause a short circuit.

These guidelines have been prepared for the professional contractor to aid in the installation of: FLYTE, LUDLOW, & ROADSTER WALL MOUNTED SINGLE ARM SCONCE (STYLE#'S FLLT01 [FL01LT], LDLT01 [LD01LT], RDLT01 [RD01LT])

All dimensions are based on original specification and are subject to change and variation. Please


consult your Design Associate for current specifications.

WATERWORKS STUDIO

# WATERWORKS STUDIO WALL MOUNTED SINGLE ARM SCONCE -UL [CE]

### INSTALLATION GUIDELINES

- Repeat step 4 with the black fixture wire and the black wire from the junction box. Make sure the wires are pushed into the junction box.
- 6. Attach LIGHT ASSEMBLY to the MOUNTING PLATE and fasten with SET SCREW to secure.
- Install a 60 watt Candelabra light bulb (not supplied) [40 watt max B15/SBC (not supplied)] & Re-Install the shade.
- 8. Turn on the power to the junction box at the fuse box/circuit breaker.
- If further assistance is required, please contact Product Support at 1-800-927-2120 (8am-6pm EST).

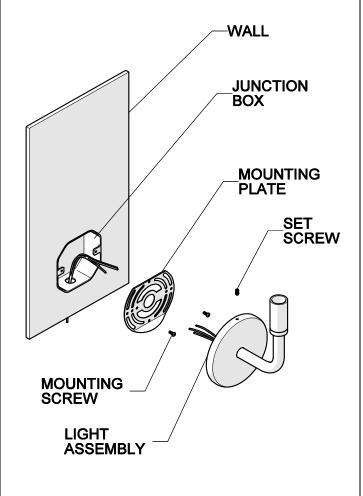

These guidelines have been prepared for the professional contractor to aid in the installation of: FLYTE, LUDLOW, & ROADSTER WALL MOUNTED SINGLE ARM SCONCE (STYLE#'S FLLT01 [FL01LT], LDLT01 [LD01LT], RDLT01 [R00ILT], RDLT01 [R0

All dimensions are based on original specification and are subject to change and variation. Please consult your Design Associate for current specifications.

WATERWORKS