

## .25

## PT72SH

.25 Ceiling Mounted 8" Shower Rose, Arm and Flange



SHOWN IN .25 CEILING MOUNTED 8" SHOWER ROSE, ARM AND FLANGE| PTSH72

### TECHNICAL DETAILS

Adjustable versus Fixed Spray: Fixed Spray  
Diameter of Head: 203 mm  
Escutcheon Primary Material: Brass  
Fittings Hole Diameter: 38 mm  
Depth / Width: 200 mm  
Height: 264 mm  
Inlet Connection Size: 3/4"  
Inlet Connection Type: Male G/BSPP  
Installation Type: Ceiling Mounted  
Integrated Diverter: N  
Length: 200 mm  
Pivot: N  
Primary Material: Brass  
Restricted Maximum Flow Rate: 9.5 liters/min  
Suggested Application: Bath  
Water Pressure Maximum: 6.0 bar  
Water Pressure Minimum: 1.5 bar  
Water Pressure Recommended: 3.0 bar

### INSPIRATION

.25 is the ultimate in utilitarian elegance: A simple and understated design that is equally functional and beautiful.

### PRODUCT FEATURES

Clean lines and modern elegance define the .25 family  
Customize your shower experience with a shower head, arm, and flange  
Standard flow rate is 2.5gpm (9.5 L/min). Also available in high efficient flow options. Contact your sales associate or call 1 (800) 899-6757 for details.

.25


PT72SH

.25 Ceiling Mounted 8" Shower Rose, Arm and Flange




TOP VIEW

SCALE: 3"=1'-0"

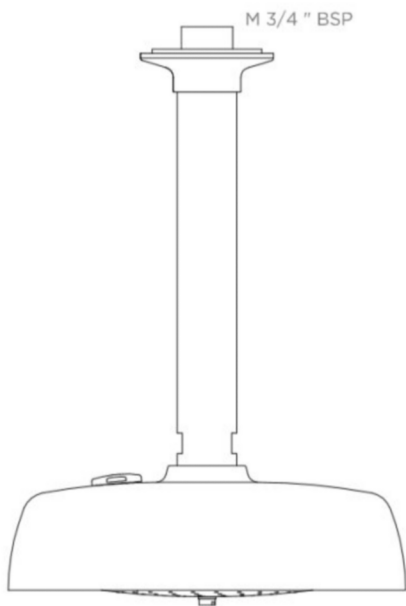

FRONT VIEW

SCALE: 3"=1'-0"

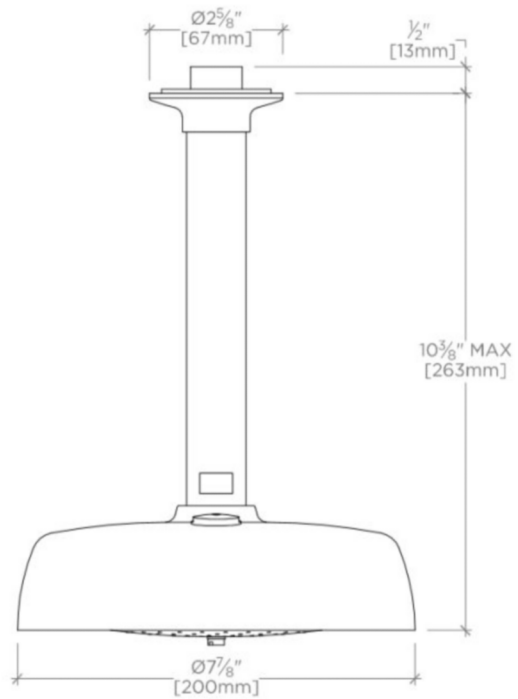

SIDE VIEW

SCALE: 3"=1'-0"