
PT05LS .25

.25 Low Profile Three Hole Wall Mounted Lavatory Faucet with Metal Cross Handles

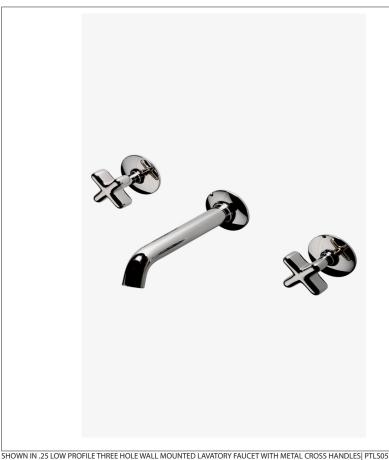

TECHNICAL DETAILS

ADA Compliance: Yes

Adjustable versus Fixed Spray: Fixed Spray Control Valve Rough-in Depth Maximum: 130 mm Control Valve Rough-in Depth Minimum: 64 mm

Drain Assembly Materials: Brass Drain Depth Maximum: 44 mm Drain Hole Diameter: 44 mm

Drain Style: Push Touch

Escutcheon Primary Material: Brass Flow Restriction Options: 1.75, 1.5, 1.0

Handle Spread Maximum: 203 mm

Handle Spread Minimum: 203 mm

Handle Turn Angle: Quarter Turn Depth / Width: 191 mm

Drain Depth Minimum: 32 mm

Height: 64 mm

Inlet Connection Size: 1/2"

Inlet Connection Type: Male G/BSPP

Inlet Supply Spread Maximum: 203 mm

Inlet Supply Spread Minimum: 203 mm

Installation Type: Wall Mounted

Length: 264 mm Number of Handles: Two

Number of Holes: Three Hole

Primary Material: Brass

Restricted Maximum Flow Rate: 8.3 liters/min

Spout Swivel: N

Suggested Application: Bath

Valve Material: Ceramic

Water Pressure Maximum: 5.5 bar Water Pressure Minimum: 1.5 bar

Water Pressure Recommended: 3.0 bar

INSPIRATION

.25 is the ultimate in utilitarian elegance: A simple and understated design that is equally functional and beautiful. Code #: ASME A112.18.1 / CSA B125.1, ASME A112.18.2 / CSA B125.2,

CODES & STANDARDS

ANSI NSF, CEC 61 Sect. 9, State of MA

PRODUCT FEATURES

Uses a simple pop-up drain that is closed and opened by pushing down on the stopper. Does not use a lift rod to operate the drain stopper.

The cross handle's anthropomorphic form is not only gentle in its execution, but also welcome to the touch. Standard flow rate is 2.2gpm (8.3 L/min) and State of California requires 1.2gpm(4.5 L/min). Also available in other flow options. Contact a sales associate for details.

.25 PT05LS

.25 Low Profile Three Hole Wall Mounted Lavatory Faucet with Metal Cross Handles

