


ETOILE

Etoile Gooseneck Concealed Tub Filler with Metal Cross Handles

ETTF43

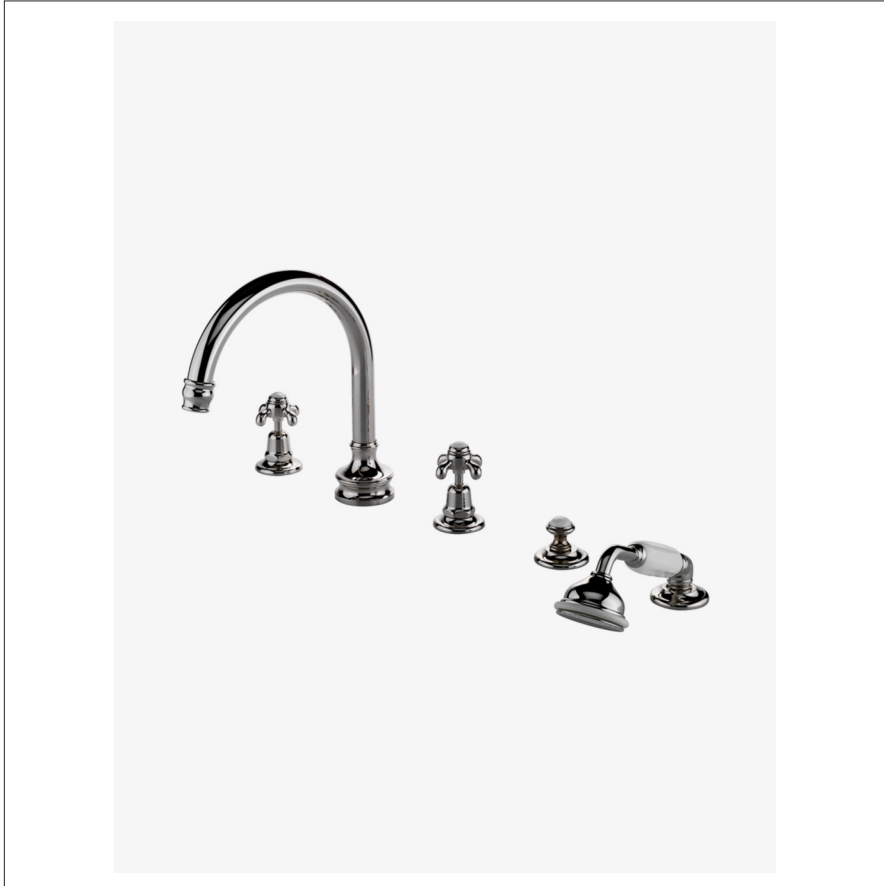

SHOWN IN ETOILE GOOSENECK CONCEALED TUB FILLER WITH METAL CROSS HANDLES| ETTF43

TECHNICAL DETAILS

ADA Compliance: Yes
 Adjustable versus Fixed Spray: Fixed Spray
 Deck Thickness Maximum: 1 7/8"
 Deck Thickness Minimum: 0"
 Escutcheon Primary Material: Brass
 Fittings Hole Diameter: 1 1/2"
 Handle Spread Maximum: 12"
 Handle Spread Minimum: 10"
 Handle Turn Angle: Quarter Turn
 Index Color / Finish and Material: White Porcelain
 Depth / Width: 12"
 Height: 11.67575"
 Index Marking: Hot/Cold
 Inlet Connection Size: 3/4"
 Inlet Connection Type: Male NPT Adapter
 Inlet Supply Spread Maximum: 12"
 Inlet Supply Spread Minimum: 10"
 Installation Type: Deck Mounted
 Integrated Diverter: N
 Length: 12 1/2"
 Number of Handles: Two
 Number of Holes: Three Hole
 Pivot: N
 Primary Material: Brass
 Spout Swivel: N
 Suggested Application: Bath
 Valve Material: Ceramic
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

Defined elegance. Etoile has a European sophistication with a timeless sense of chic.

CODES & STANDARDS

Code # ETTU43: Certified with IAPMO, UL & State of MA. Complies with ASME A112.18.1/CSA B125.1, ANSI A117.1 ADA & ASTM E 1621-05.

PRODUCT FEATURES

The gooseneck's lyrical curve provides a fitting complement to the graceful, elongated curves of all pieces in the line.


The manufacturing process encompasses casting, turning, forging, hand-fitting and hand polishing.



ETOILE


ETTF43

Etoile Gooseneck Concealed Tub Filler with Metal Cross Handles




TOP VIEW

SCALE: 1 1/2"=1'-0"

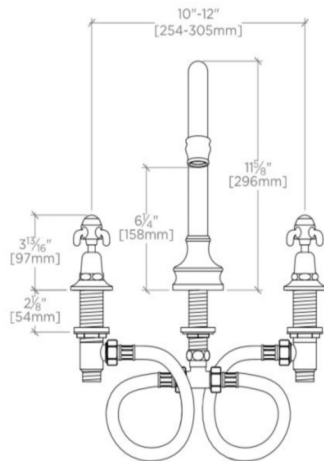

FRONT VIEW

SCALE: 1 1/2"=1'-0"

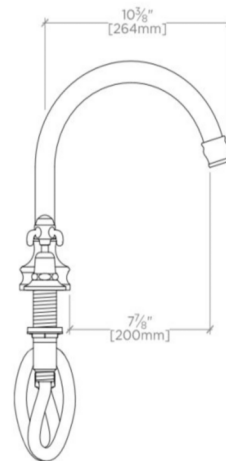

SIDE VIEW

SCALE: 1 1/2"=1'-0"