

INSTALLATION GUIDELINES

IMPORTANT:

- To ensure this product is installed properly, you must read and follow these guidelines.
- The owner/user of this product must keep this information for future reference.
- This product must be installed by a professional licensed contractor.
- Be sure your installation conforms to federal state, and local codes. In the State of Massachusetts, all installations must comply with the rules and regulations set forth within 248 CMR.
- Inspect this product to ensure you have all the parts required for proper installation. Product is sold partially assembled but shown fully disassembled for illustrative and service purposes only.
- Use only a strap wrench or protected/smooth-jaw wrench on any finished surface.
- The use of certain plumber's putty may stain stone or tile surfaces.
- If further assistance is required, please contact Product Support at 1-800-927-2120 Monday through Friday, 8am - 6pm EST.
- Refer to the separate Service Parts Documents for available replacement parts.



STYLE No. DSKM40, DS40KM

Dash One Hole High Profile Bar Faucet with Metal Cross Handle




STYLE No. DSKM50, DS50KM

Dash One Hole High Profile Bar Faucet with Metal Lever Handle


TECHNICAL DETAILS:

DETAIL	SPECIFICATION
FITTINGS HOLE DIAMETER	1-3/8" [35mm]
HANDLE TURN ANGLE	QUARTER TURN
INLET CONNECTION	3/8" COMPRESSION CONNECTOR HOSES ‡
MAXIMUM DECK THICKNESS	1-1/4" [32mm]
RESTRICTED MAXIMUM FLOW RATE	2.2gpm [8.3L/min]
SPOUT REACH	5-1/4" [133mm]
SPOUT SWIVEL	NO
WATER PRESSURE RANGE	20psi [1.5 bar] MIN 85psi [6.0 bar] MAX
WATER PRESSURE RECOMMENDED	45psi [3.0 bar]

‡ UK Style No. **DS40KM** and **DS50KM** is supplied with 2 **BSPP** adapters, assembly required.

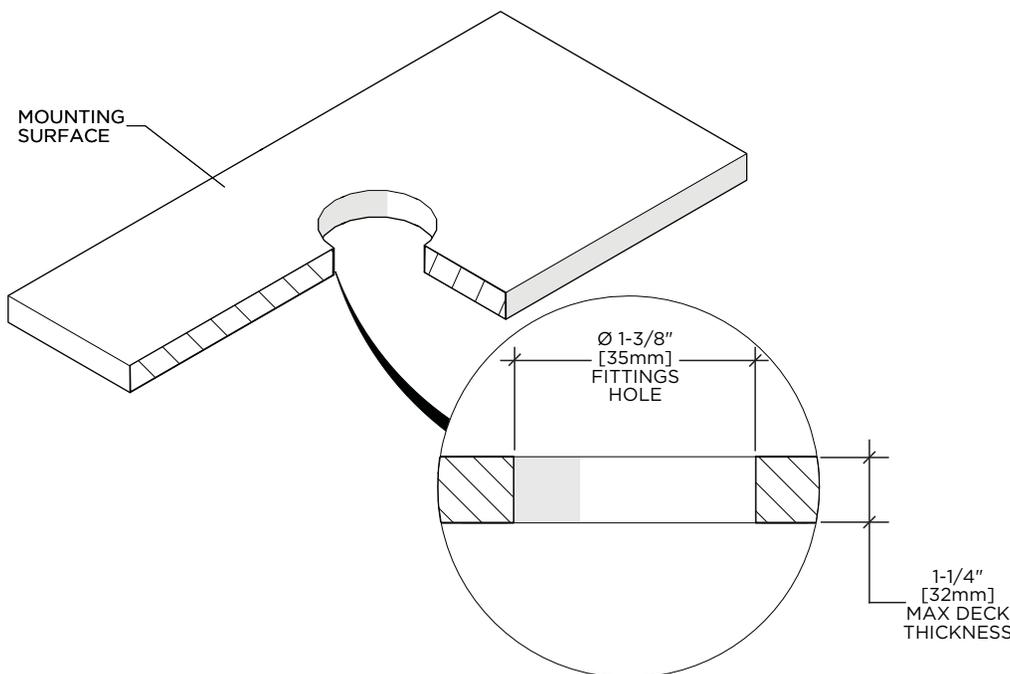

INSTALLATION GUIDELINES




STYLE No. DSKM40, DS40KM

Dash One Hole High Profile Bar Faucet with Metal Cross Handle




STYLE No. DSKM50, DS50KM

Dash One Hole High Profile Bar Faucet with Metal Lever Handle

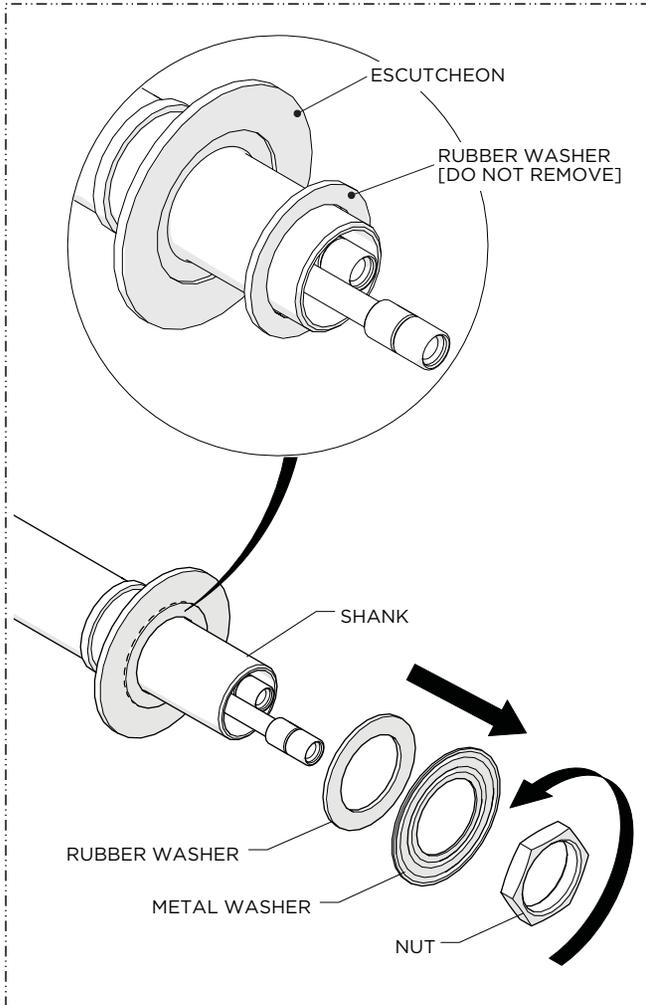


1. Unthread and remove the NUT from the SHANK then remove the METAL and RUBBER WASHERS

NOTE: Do **NOT** remove the RUBBER WASHER beneath the ESCUTCHEON.

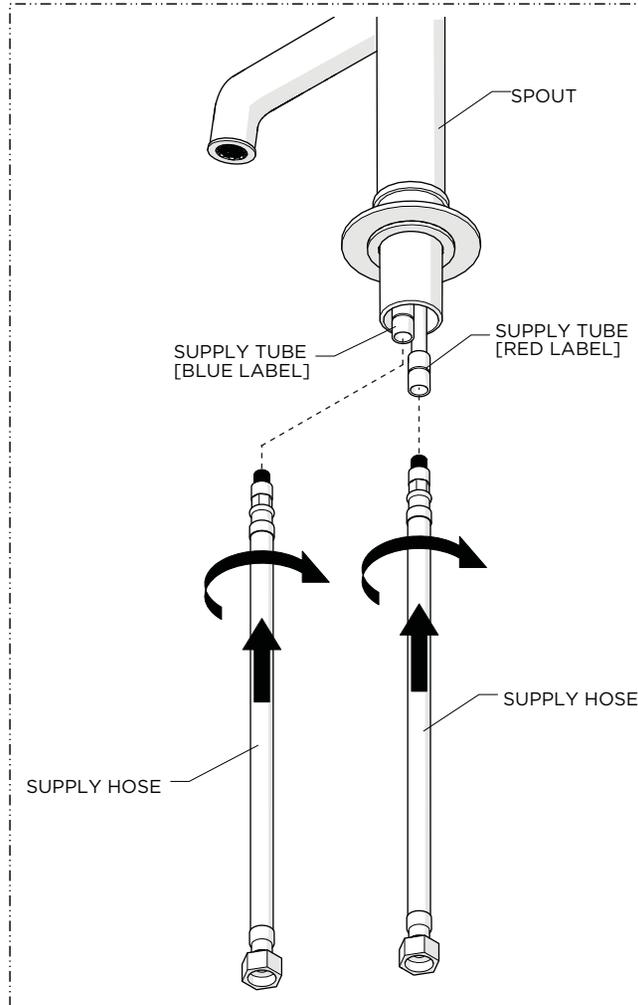

2. Thread and securely tighten the SUPPLY HOSES onto the SUPPLY TUBES installed on the SPOUT.


NOTE: The HOSES are M10 x 3/8" COMPRESSION CONNECTOR HOSES and the SUPPLY TUBES are marked BLUE for cold and RED for hot.

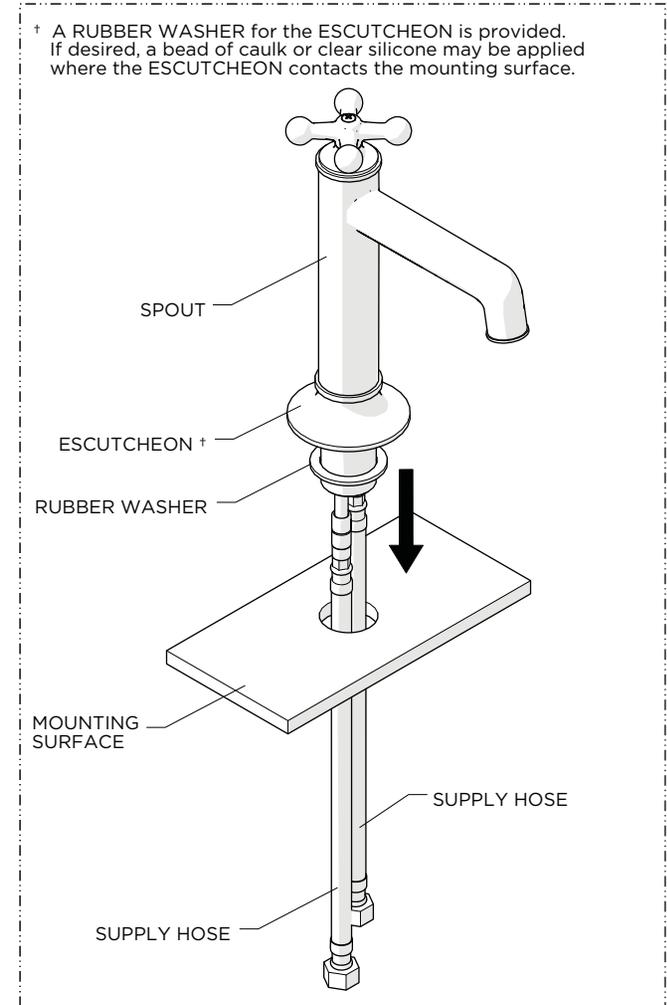

† A RUBBER WASHER for the ESCUTCHEON is provided. If desired, a bead of caulk or clear silicone may be applied where the ESCUTCHEON contacts the mounting surface.


3. Insert the SPOUT through the hole on the mounting surface making sure the RUBBER WASHER provided is beneath the ESCUTCHEON.

INSTALLATION GUIDELINES




STYLE No. DSKM40, DS40KM

Dash One Hole High Profile Bar Faucet with Metal Cross Handle




STYLE No. DSKM50, DS50KM

Dash One Hole High Profile Bar Faucet with Metal Lever Handle

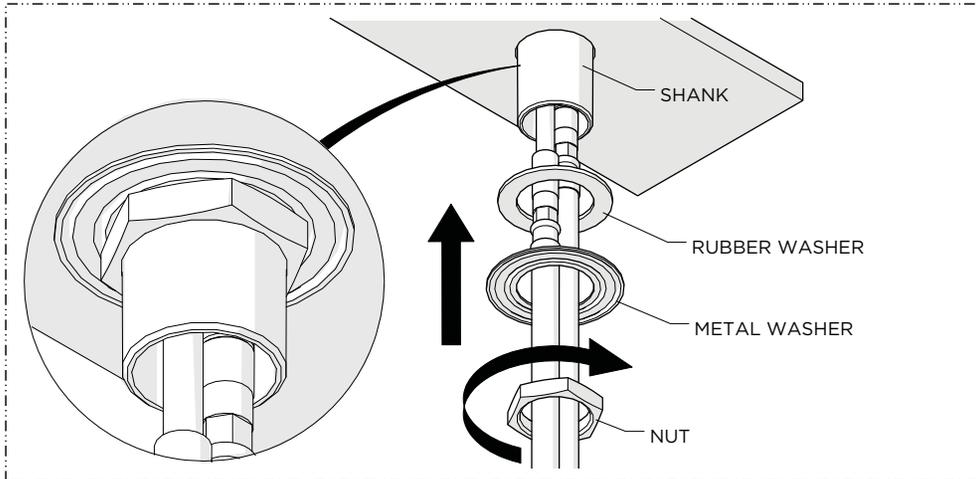


4. Re-attach the RUBBER and METAL WASHERS then thread and securely tighten the NUT onto the SHANK.

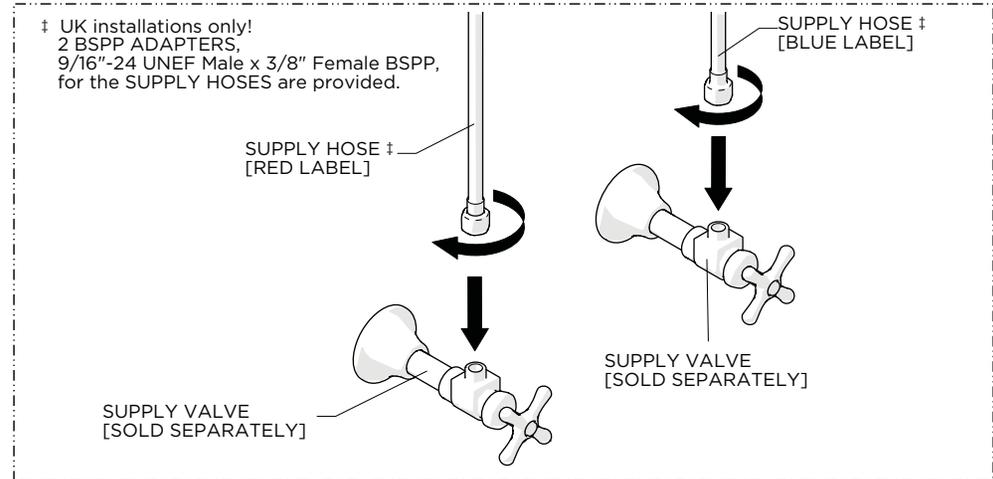


5. Connect the SUPPLY HOSES to the SUPPLY VALVES (sold separately).

NOTE: The HOSES are connected to SUPPLY TUBES that are marked BLUE for cold and RED for hot

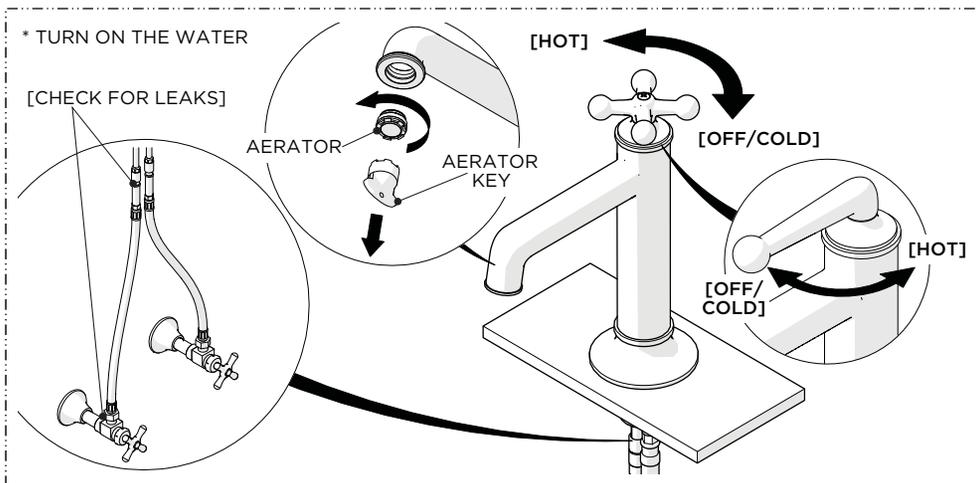

6. Unthread and remove the AERATOR from the SPOUT using the KEY provided then turn on the water and operate the HANDLE to ensure it functions properly and flush out any debris in the supply lines. Check all connections for leaks and turn off the water.

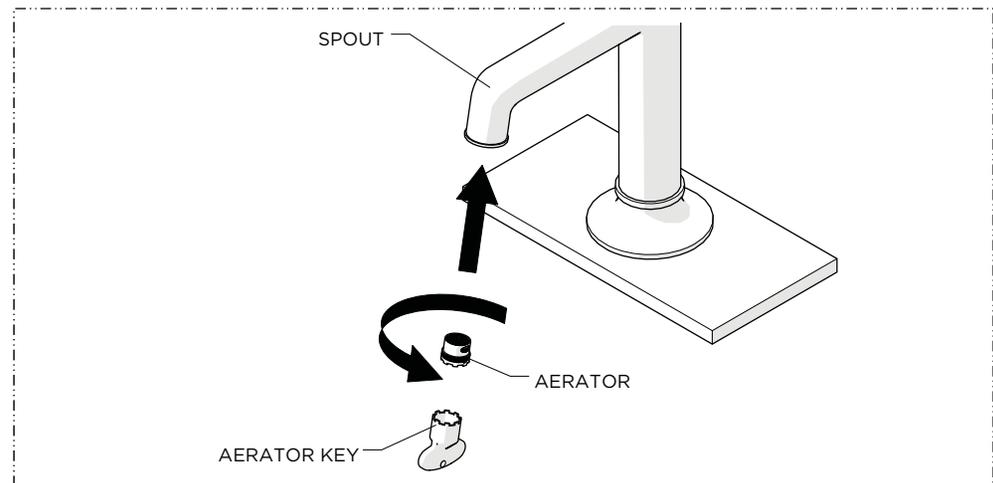


7. Re-install the AERATOR.

INSTALLATION GUIDELINES




STYLE No. DSKM40, DS40KM

Dash One Hole High Profile Bar Faucet with Metal Cross Handle




STYLE No. DSKM50, DS50KM

Dash One Hole High Profile Bar Faucet with Metal Lever Handle

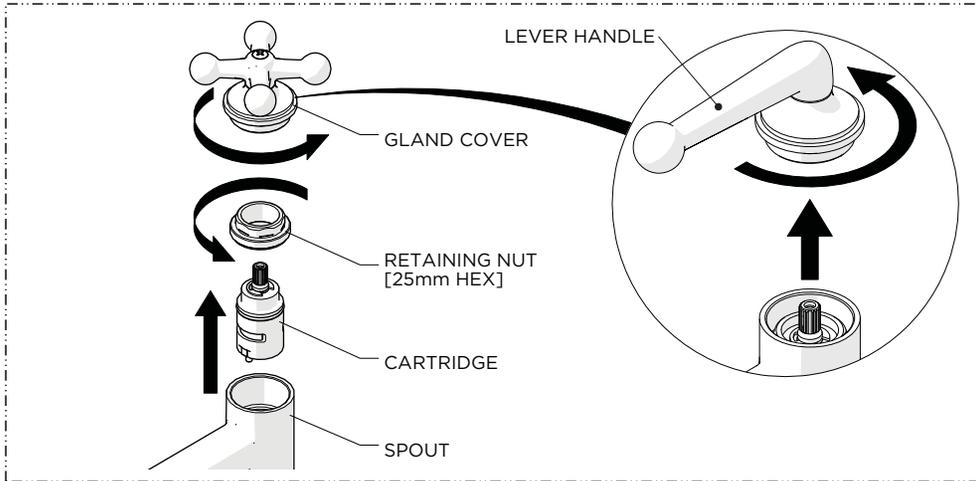

SERVICING THE CARTRIDGE:

1. Unthread and remove the GLAND COVER and RETAINING COLLAR from the SPOUT then remove the CARTRIDGE.

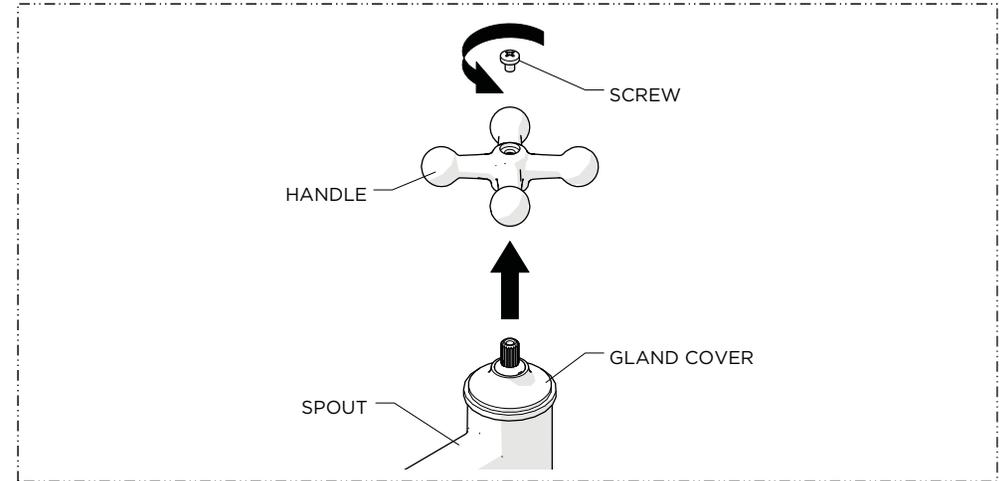

SERVICING THE HANDLE: CROSS ONLY

1. Unthread and remove the FINISHED SCREW then remove the HANDLE.