
EASTON

EAKM03

Easton Classic Two Hole Bridge Gooseneck Kitchen Faucet, White Porcelain Lever Handles

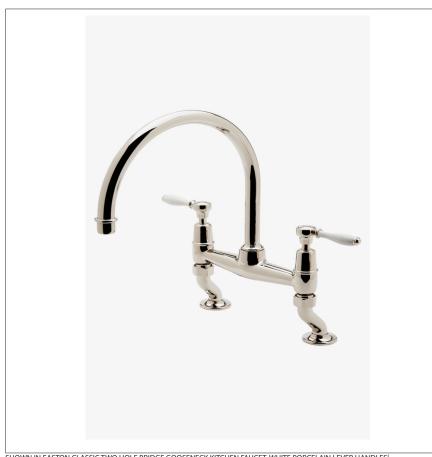

TECHNICAL DETAILS

ADA Compliance: Yes Adjustable versus Fixed Spray: Fixed Spray Deck Thickness Maximum: 32 mm Deck Thickness Minimum: 0 mm Fittings Hole Diameter: 25 mm Flow Restriction Options: 1.75, 1.5, 1.0 Handle Spread Maximum: 200 mm Handle Spread Minimum: 200 mm Handle Turn Angle: Quarter Turn Index Color / Finish and Material: White Porcelain Depth / Width: 337 mm Height: 406 mm Inlet Connection Size: 1/2" Inlet Connection Type: Straight Male Threads Inlet Supply Spread Maximum: 276 mm Inlet Supply Spread Minimum: 124 mm Length: 343 mm Number of Holes: Two Hole Primary Material: Brass Restricted Maximum Flow Rate: 8.3 liters/min Spray Included in Unit: N Suggested Application: Bar, Kitchen, Laundry Valve Material: Ceramic Water Pressure Maximum: 6.0 bar Water Pressure Minimum: 1.5 bar Water Pressure Recommended: 3.0 bar

SHOWN IN EASTON CLASSIC TWO HOLE BRIDGE GOOSENECK KITCHEN FAUCET, WHITE PORCELAIN LEVER HANDLES

INSPIRATION

Drawing on Edwardian style, Easton is the most extensive Waterworks family; a range of moods and a selection of Code # EAKM03: CEC products from fittings to furniture.

CODES & STANDARDS

PRODUCT FEATURES

Brass metal is used for all trim and valve components

The manufacturing process encompasses casting, turning, forging, hand-fitting and hand polishing. Easton is our most comprehensive fittings family.

Easton has a clean-lined utilitarian profile, with a slightly elongated spout.

Standard flow rate is 2.2gpm (8.3 L/min) and State of California requires a maximum of 1.8gpm(6.8 L/min). Also available in other flow options. Contact a sales associate for details.

CERTIFICATIONS



PRODUCT (NOTES)

Spray sold separately

EASTON

EAKM03

Easton Classic Two Hole Bridge Gooseneck Kitchen Faucet, White Porcelain Lever Handles

