

WATERWORKS

PRODUCT SUPPORT
800.927.2120
WATERWORKS.COM

ELSA

Low Profile Three Hole Deck Mounted Lavatory Faucet with Metal Cross Handles in Chrome

STYLE No. ELLS63

REFERENCE No. ELLS53C

ITEM No. 07-16937-66159

SPECIFICATIONS
PAGE 1 OF 3

DESIGN

An updated 1930's design that is curvaceous and bold; Elsa conveys charm, warmth and a touch of whimsy.

FEATURES

Brass material is used for all trim and valve component parts.

The manufacturing process encompasses casting, turning, hand-fitting and hand polishing.

The smooth, sculptural contours and simplified linear detail ensure that Elsa will be comfortable and welcomed in any bathroom.

Available option that complies with 0.25% Weighted Average Lead Content (WALC).



SHOWN IN Chrome

WATERWORKS

PRODUCT SUPPORT
800.927.2120
WATERWORKS.COM

ELSA


Low Profile Three Hole Deck Mounted Laboratory Faucet with Metal Cross Handles in Chrome

STYLE No. ELLS63
REFERENCE No. ELLS53C
ITEM No. 07-16937-66159

SPECIFICATIONS

PAGE 2 OF 3

All dimensions are based on original specifications and are subject to change and variation. Please consult your Design Associate for current specifications.

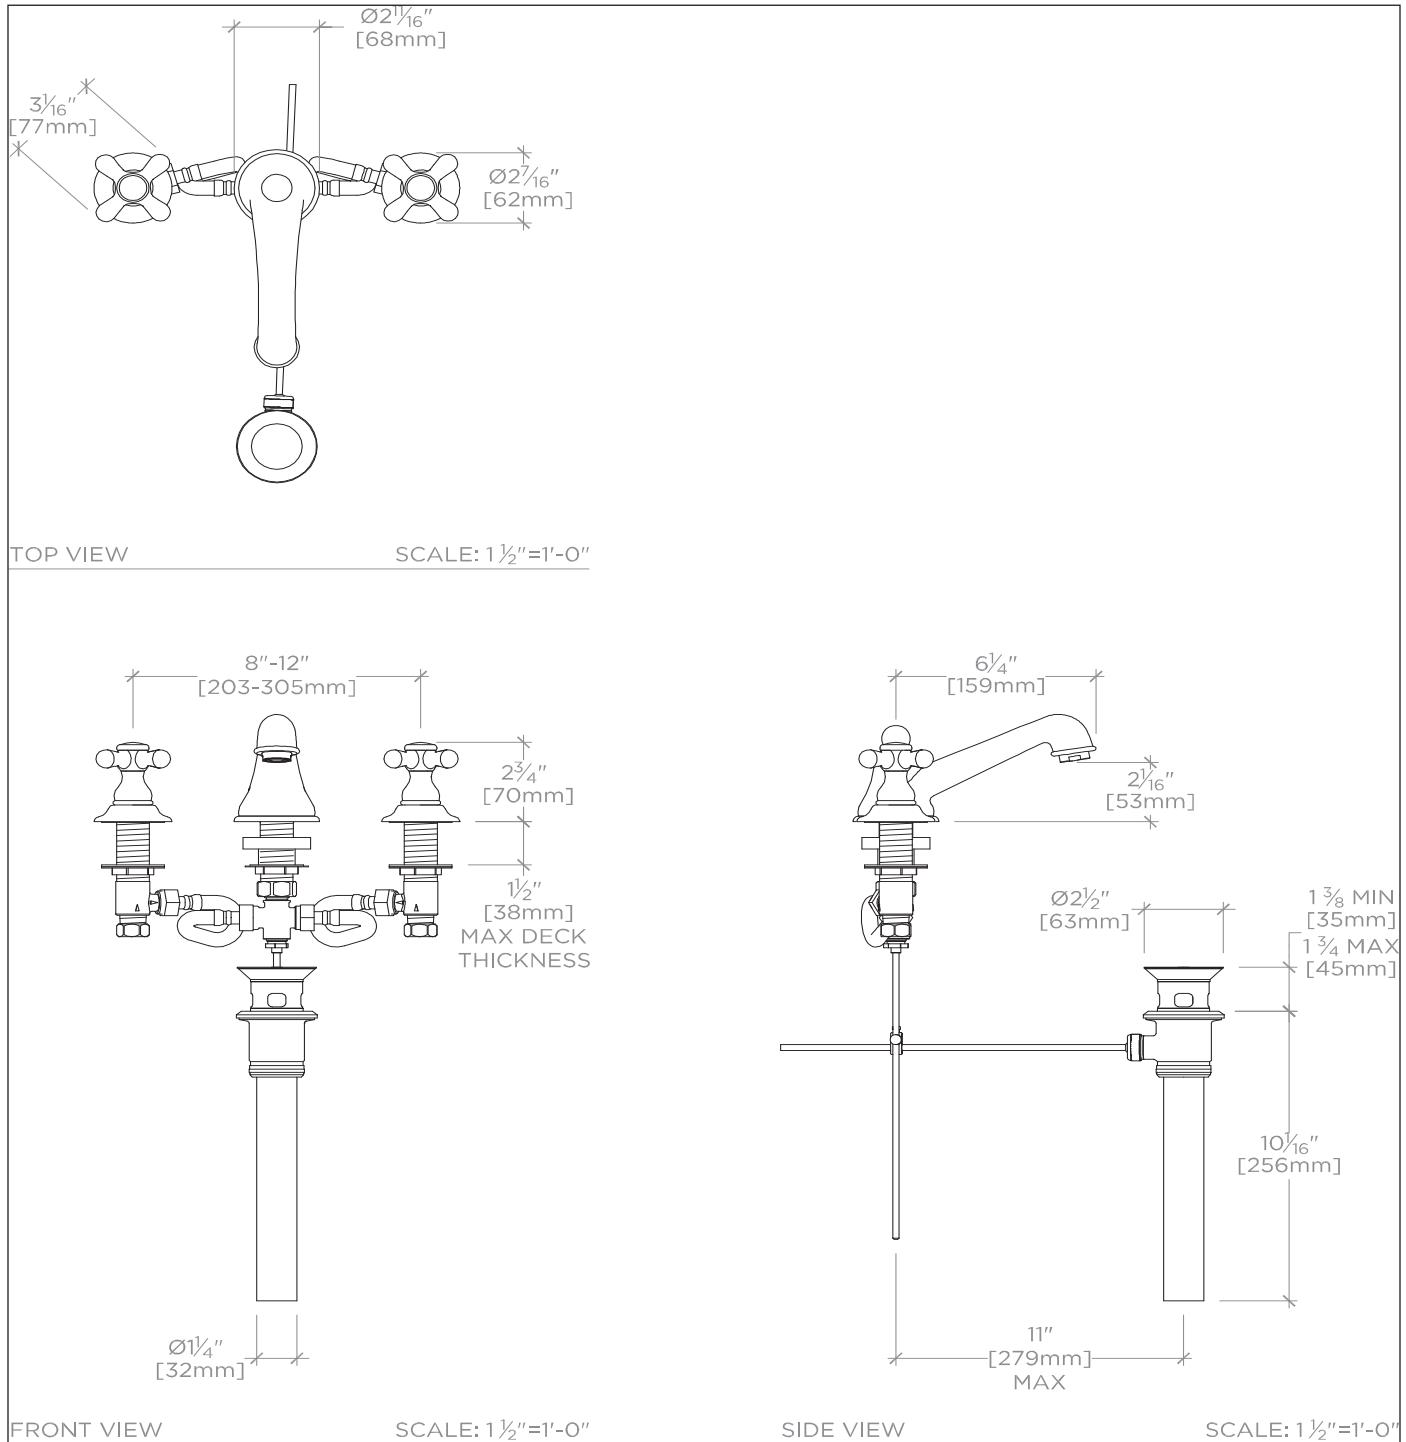

WATERWORKS

PRODUCT SUPPORT
800.927.2120
WATERWORKS.COM

ELSA

Low Profile Three Hole Deck Mounted Lavatory Faucet with Metal Cross Handles in Chrome

STYLE No. ELLS63
REFERENCE No. ELLS53C
ITEM No. 07-16937-66159

SPECIFICATIONS
PAGE 3 OF 3

SPECIFICATIONS

Primary Material: Brass
Drain Depth Maximum: 1 3/4"
Drain Depth Minimum: 1 3/8"
Drain Hole Diameter: 1 3/4"
Drain Style: Pop-up
Handle Spread Maximum: 12"
Handle Spread Minimum: 8"
Inlet Connection Size: 1/2"
Inlet Connection Type: Male with Supply Nut
Inlet Supply Spread Maximum: 12"
Inlet Supply Spread Minimum: 8"
Maximum Deck Thickness: 1 13/16"
Minimum Deck Thickness: 0"
Maximum Water Pressure: 80 psi
Minimum Water Pressure: 20 psi
Fittings Hole Diameter: 1 1/4"
Recommended Water Pressure: 45 psi
Restricted Maximum Flow Rate: 2.2 gpm

CARE INSTRUCTIONS

Wash surfaces gently with a soft damp cloth; use a neutral liquid soap with water for daily cleaning, dry any overspray.

CODES AND STANDARDS

Certified with NSF, IAPMO & State of MA.
Complies with ASME A112.18.1, CSA B125, ASME A112.18.2 / CSA B125.2, ANSI 117.1 ADA, & ASTM E 1621-05.

FLOW RATE CURVE

REQUIRED PLUMBING DETAILS

Below is a list of choices that must be made to complete your lavatory faucet.