

OLYMPIA

Olympia Wall Mounted 8" Shower Rose, Arm and Flange

OMSH01



SHOWN IN OLYMPIA WALL MOUNTED 8" SHOWER ROSE, ARM AND FLANGE| OMSH01

TECHNICAL DETAILS

ADA Compliance: Yes
Adjustable versus Fixed Spray: Fixed Spray
Diameter of Head: 8"
Escutcheon Primary Material: Brass
Flow Restriction Options: 2.0, 1.75, 1.5, 0.92
Depth / Width: 21 9/16"
Height: 8 1/16"
Inlet Connection Size: 3/4"
Inlet Connection Type: FEMALE NPT
Installation Type: Wall Mounted
Integrated Diverter: N
Interior / Exterior Application: Interior Only
Length: 8"
Primary Material: Brass
Restricted Maximum Flow Rate: 2.5 gpm
Suggested Application: Bath
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 25.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Rooted in the industrial forms of the 1920's through 1940's, Olympia combines the straightforward functionality of the machine age, without the cold, hard edge. Olympia is proof that beauty and utility can coexist simply without ornamentation.

CODES & STANDARDS

Code # OMSH01: ASME A112.18.1 / CSA B125.1, State of MA, CEC

PRODUCT FEATURES

Brass material is used for all trim and valve component parts.

The manufacturing process encompasses casting, turning, forging, hand-fitting and polishing.

Unique details include the smooth, spherical knuckles on the cross handles, and gentle curving spouts.


Standard flow rate is 2.5gpm (9.5 L/min). Also available in high efficient flow options. Contact your sales associate or call 1 (800) 899-6757 for details.




OLYMPIA

OMSH01


Olympia Wall Mounted 8" Shower Rose, Arm and Flange

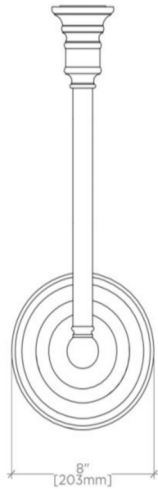

TOP VIEW SCALE: 1/2"=1'-0"



FRONT VIEW SCALE: 1/2"=1'-0"

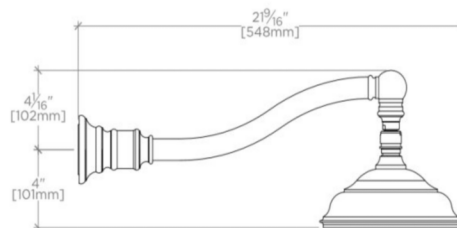

SIDE VIEW SCALE: 1/2"=1'-0"