


**FRLT05 (FR05LT)**

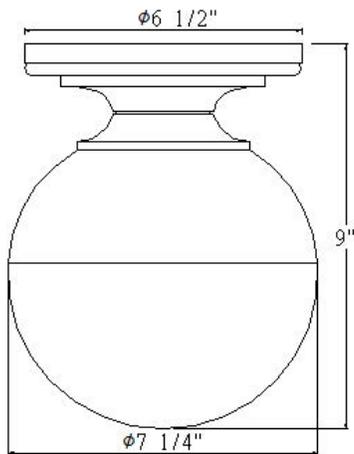

Notes:


- Bulbs: A19,E26(E27)base , 60 watt max.
- Outlet box: 3<sup>3</sup>/<sub>5</sub>" x 3<sup>3</sup>/<sub>5</sub>" switch type.
- All items in (BRACKETS) refer to CE styles.

**INSTALLATION**

> **IMPORTANT:** Check to ensure the power supply has been turned off prior to start installation.


1. Install an outlet box (3<sup>3</sup>/<sub>5</sub>" x 3<sup>3</sup>/<sub>5</sub>" switch type ) vertically for vertical mounting making sure to use supply connection wire that meets local codes.
2. Inspect this product to assure you have all parts required for proper installation.
3. Mount the mounting plate to wall outlet box using 2pcs screw A(supplied).
4. Connect the wires from the fixture to the wires in the outlet-box as shown in Figure 1.
5. Install the fixture body to the mounting plate using 3pcs screw B(supplied).
6. Install 60 watt max. A19 standard bulb(not included) into the fixture body.
7. Install the glass shade into the fixture body.
8. Installation is completed, turn on power.

**Figure 1**

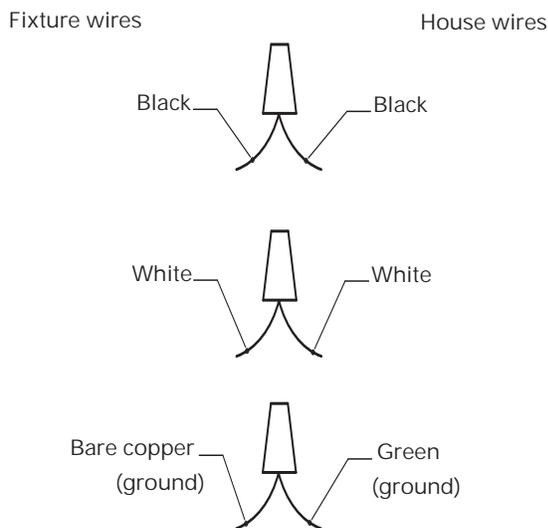

**Figure 2**

Vertical Mounting,  
Vertical Mount shown

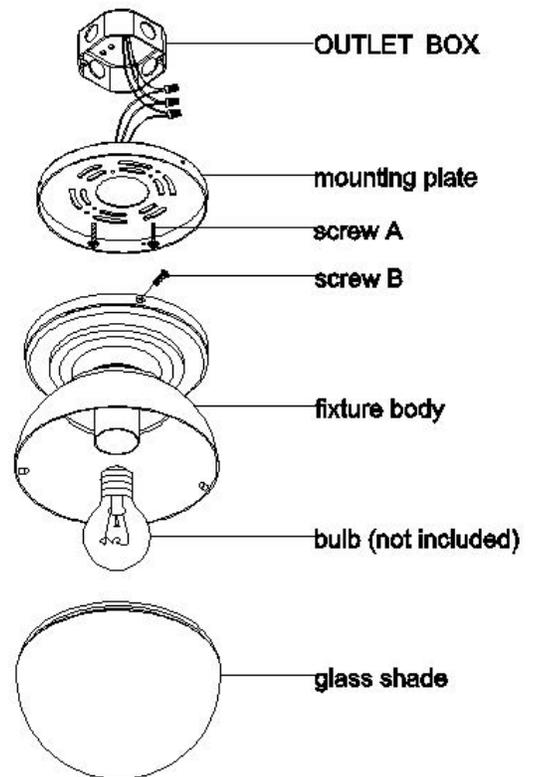

These guidelines have been prepared for the professional contractor to aid in the installation of:  
**Foro Flush Mount Small FRLT05(FR05LT)**

All dimensions are based on original specifications and are subject to change and variation.  
Please consult your Design Associate for current specifications.

W A T E R W O R K S