



ESTB. 1978

WATERWORKS

---

## Claypaper



Painterly, fluid brushstrokes wash over Claypaper tile. Each piece is hand-painted in soft colors, creating a gentle and varied artistic effect that partners well with many other surfaces.



ESTB. 1978

# WATERWORKS

## Claypaper

HANDMADE FIELD TILE



2" x 4 1/4" \*\*



3" x 3" \*\*



3" Hexagon \*\*



4 1/4" Hexagon \*\*



2" x 4 1/4" Picket \*\*



3" x 6" \*



6" x 6" \*



3" x 12" \*



6" x 12" \*

\*Note: Coordinating bullnose available

\*\*Note: Handmade field tile can be tape faced for an additional charge



ESTB. 1978

# WATERWORKS

## Claypaper

HANDMADE MOSAICS



2" Hexagon Mosaic



2" x 2" Stacked Mosaic



2" x 2" Staggered Mosaic



1 1/4" x 2 3/8" Stacked Mosaic



1 1/4" x 2 3/8" Staggered Mosaic



1" x 4" Chevron Mosaic



ESTB. 1978

# WATERWORKS

## Claypaper

### TRIM



Devon Rail  
1 7/8" x 6"



Devon Rail  
1 7/8" x 12"



Belmont Rail  
3" x 6"



Belmont Rail  
3" x 12"



Everett Base  
4 3/4" x 6"



Everett Base  
4 3/4" x 12"



Quarter Round  
1" x 6"



Quarter Round  
1" x 12"



Standard Liner  
1/2" x 6"



Standard Liner  
1/2" x 12"





ESTB. 1978

# WATERWORKS

## Claypaper


### PALETTE



Sea Glossy Wash V4-5



Indigo Glossy Wash V4-5



Breeze Glossy Wash V4-5



Pewter Glossy Wash V4-5



Cocoa Glossy Wash V4-5



Sage Glossy Wash V4-5



Nickel Glossy Wash V4-5



Egret Glossy Solid V2



Talc Glossy Solid V2



Water Glossy Solid V3



Earl Gray Glossy Solid V3



Seaglass Glossy Solid V3



Flannel Glossy Solid V3



Marine Glossy Solid V3



Laurel Glossy Solid V3


\* See variation chart on page 7



ESTB. 1978

# WATERWORKS

## Claypaper

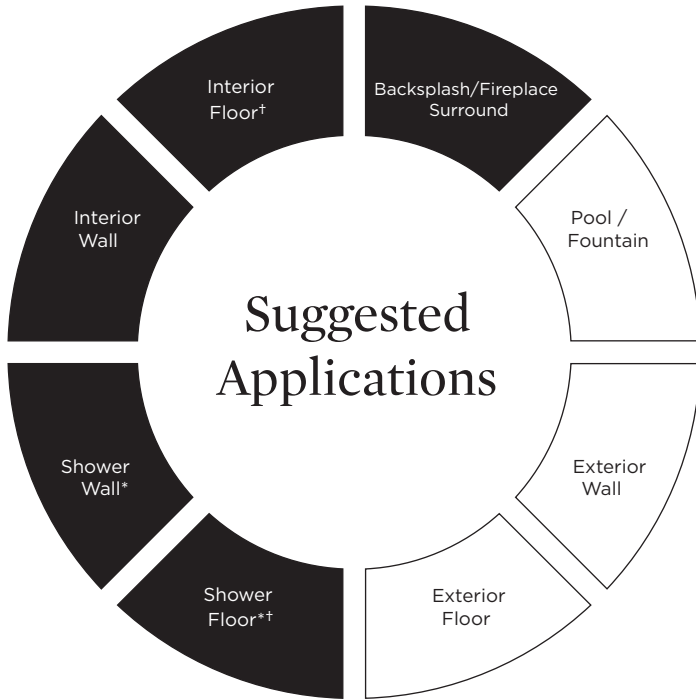

● Recommended Use      ○ Not Recommended Use

### Application Notes

\* Suitable for use in wet environments, if properly installed, sealed, and maintained

† Handmade field tile and mosaics only

### Variation Level

V1	V2	V3	V4-5	V5

1. MINIMAL, IF ANY COLOR VARIATION
2. SLIGHT COLOR VARIATION CAN BE EXPECTED
3. A MEDIUM RANGE OF COLOR VARIATION IS TYPICAL; DARKER AND LIGHTER TONES ARE EVIDENT
4. CONSIDERABLE COLOR VARIATION IS TYPICAL; FROM DARKS TO LIGHTS AND SOME TONE CHANGES
5. EXTREME COLOR VARIATION CAN BE EXPECTED - THE RANGE IS OFTEN DIFFERING BUT COMPLEMENTARY

### Thickness

$\frac{3}{8}''^*$

\*Nominal: +/-  $\frac{1}{8}''$

### Suggested Grout Lines

$\frac{1}{16}'' - \frac{1}{8}''$

### Installation / Maintenance

- WATERWORKS ASSUMES NO RESPONSIBILITY FOR INSTALLATION
- Installation constitutes acceptance.
- Tile should be installed by a licensed and experienced tile setter.
- Refer to TCNA (Tile Council of North America) or ANSI standards for installation guidelines.
- All tile must be inspected PRIOR to installation.
- Dry lay tile prior to installation to allow for blending of color variation.
- Seal tile PRIOR to grouting. Dark grout can stain crackle tile.
- Waterworks recommends a grouted test panel prior to installation to understand final appearance of grouted materials.
- Re-seal tile and grout after installation and maintain regularly.