



ESTB. 1978

WATERWORKS

---

## District Tile



District Tile features transparent glazes characterized by pooling and a crackle surface in deep, rich colors. Assorted handmade or precise field sizes are complimented by moldings and trimmers—the architectural building blocks that create stunning interiors.



ESTB. 1978

WATERWORKS

## District Tile

FIELD TILE



1 1/8" X 6"



2" X 2"



2" X 6"




4" X 4"



3" X 6"



4" X 8"



6" X 6"

\* Coordinating bullnose available



ESTB. 1978

# WATERWORKS

## District Tile

### ARCHITECTURAL TRIM



Quarter Bevel  
1" X 6"



Bevel Cove  
1" X 6"



Quarter Round  
1" X 6"



Quarter Square  
5/8" X 6"



Quarter Square Cove  
5/8" X 6"



Dot Liner  
1/2" X 6"



Bevel Liner  
3/4" X 6"



Standard Liner  
1/2" X 6"



Crown Rail  
2" X 6"



Square Rail  
2" X 6"



Drip Edge Rail  
1" X 6"



ESTB. 1978


WATERWORKS

## District Tile


ARCHITECTURAL TRIM




Mud Base  
3 1/4" X 6"



Base Molding  
3 7/8" X 6"



Crown Molding  
4 1/4" X 6"

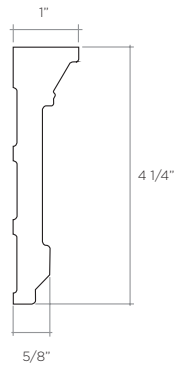





ESTB. 1978


# WATERWORKS

## District Tile

### PALETTE




Birch V2-V3  
(Glossy Crackle)



Burnt Sugar V3-V4  
(Glossy Crackle)



Butter V2-V3  
(Glossy Crackle)




Cygnet V1  
(Glossy Crackle)




Fig V3-V4  
(Glossy Crackle)




Grasshopper V2-V3  
(Glossy Crackle)




Hickory V2-V3  
(Glossy Crackle)



Ink V3-V4  
(Glossy Crackle)



Lagoon V2-V3  
(Glossy Crackle)



Licorice V1  
(Glossy Solid)




Marigold V2-V3  
(Glossy Crackle)



Platinum V2-V3  
(Glossy Crackle)



Privet V3-V4  
(Glossy Crackle)



Seaweed V2-V3  
(Glossy Crackle)



Sparrow V2-V3  
(Glossy Crackle)



Whippet V2-V3  
(Glossy Crackle)


\* See Variation Chart on Next Page



ESTB. 1978

# WATERWORKS

## District Tile

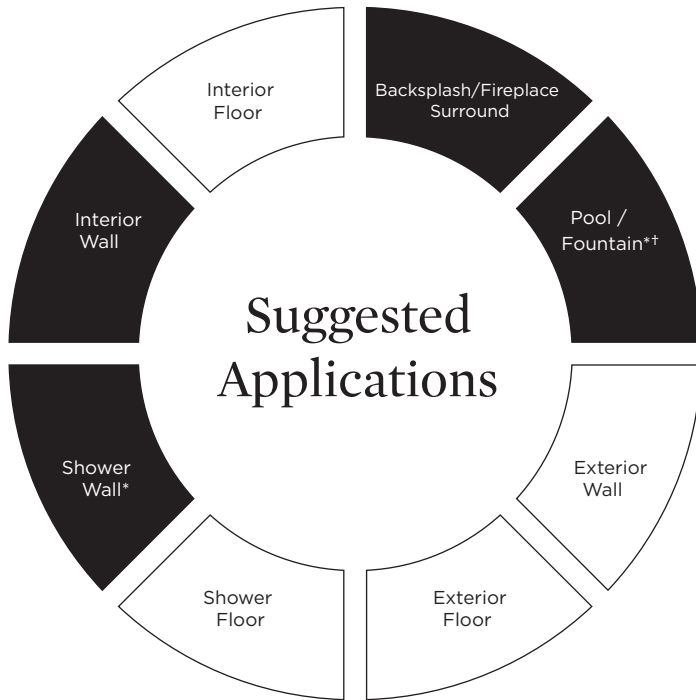

● Recommended Use      ○ Not Recommended Use


### Application Notes

\* Suitable for use in wet environments, including steam showers, if properly installed, sealed, and maintained


† Suitable above waterline in tropical/subtropical climates ONLY

### Variation Level


V1




V2




V3



V4



V5



1. MINIMAL, IF ANY COLOR VARIATION

2. SLIGHT COLOR VARIATION CAN BE EXPECTED

3. A MEDIUM RANGE OF COLOR VARIATION IS TYPICAL; DARKER AND LIGHTER TONES ARE EVIDENT

4. CONSIDERABLE COLOR VARIATION IS TYPICAL; FROM DARKS TO LIGHTS AND SOME TONE CHANGES

5. EXTREME COLOR VARIATION CAN BE EXPECTED - THE RANGE IS OFTEN DIFFERING BUT COMPLEMENTARY

### Thickness



\*Nominal: +/- 1/8"

### Suggested Grout Lines

1/16" - 1/8"

### Installation / Maintenance

- WATERWORKS ASSUMES NO RESPONSIBILITY FOR INSTALLATION
- Installation constitutes acceptance.
- Tile should be installed by a licensed and experienced tile setter.
- Refer to TCNA (Tile Council of North America) or ANSI standards for installation guidelines.
- All tile must be inspected PRIOR to installation.
- Dry lay tile prior to installation to allow for blending of color variation.
- Seal tile PRIOR to grouting. Dark grout can stain crackle tile.
- Waterworks recommends a grouted test panel prior to installation to understand final appearance of grouted materials.
- Re-seal tile and grout after installation and maintain regularly.