ESTB. 1978

WATERWORKS

Magma

Created from the fine-grained lava of an erupting volcano, Magma's handmade tile presents a richness and decidedly modern feel. With unique chemistry, texture and appealing variations in carefully curated color, it elegantly changes the mood of a bath or kitchen.

ESTB. 1978

WATERWORKS

Magma

FIELD TILE

2” X 8”

3” X 6”



6” Hexagon*

* Available in Zinc Crackle Only

ARCHITECTURAL ELEMENTS

3/8” X 6” Round Liner

3/4” X 6” Beveled Rail

4” X 8” Standard Base

ESTB. 1978

WATERWORKS

Magma

DECORATIVE MOSAIC

3” Hexagon V5
Java Blend
(Matte/Crackle)



3” Hexagon V5
Mariner Blend
(Matte)

3” Hexagon V5
Nightwatch/Midnight Blend
(Matte)

3” Hexagon V5
Zinc/Stargazer Blend
(Crackle)

Herringbone V5
Java Blend
(Matte/Crackle)

Herringbone V5
Mariner Blend
(Matte)

Herringbone V5
Nightwatch/Midnight Blend
(Matte)

Herringbone V5
Zinc/Stargazer Blend
(Crackle)

Brick 1/2” x 2 ¾” V5
Java Blend
(Matte/Crackle)

Brick 1/2” x 2 ¾” V5
Mariner Blend
(Matte)

Brick 1/2” x 2 ¾” V5
Nightwatch/Midnight Blend
(Matte)

Brick 1/2” x 2 ¾” V5
Zinc/Stargazer Blend
(Crackle)

* See variation chart
** Surface texture is inherent in the material; glazes may crackle

ESTB. 1978

WATERWORKS

Magma

PALETTE

Java V4
(Matte)

Midnight V5
(Matte)

Mariner V5
(Matte)

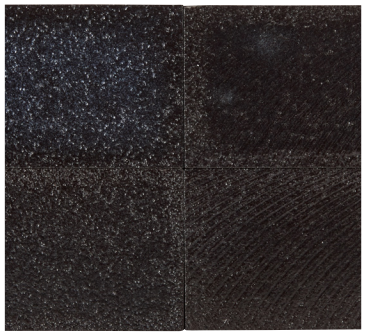

Nightwatch V4
(Matte)

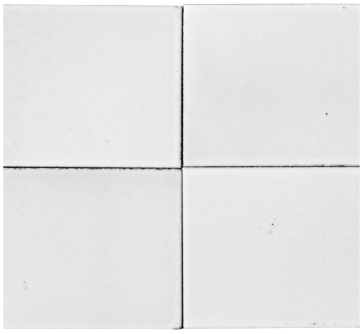

Stargazer V4
(Crackle)

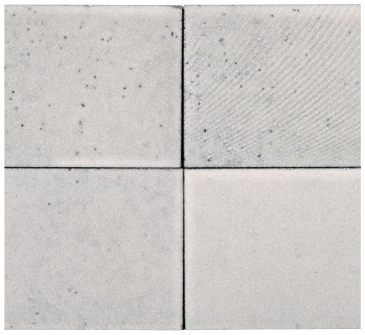

Zinc V5
(Crackle)

* All blends have a variation level of 5 (see chart on page 5)
** Surface texture is inherent in the material; glazes may crackle

ESTB. 1978

WATERWORKS

Magma

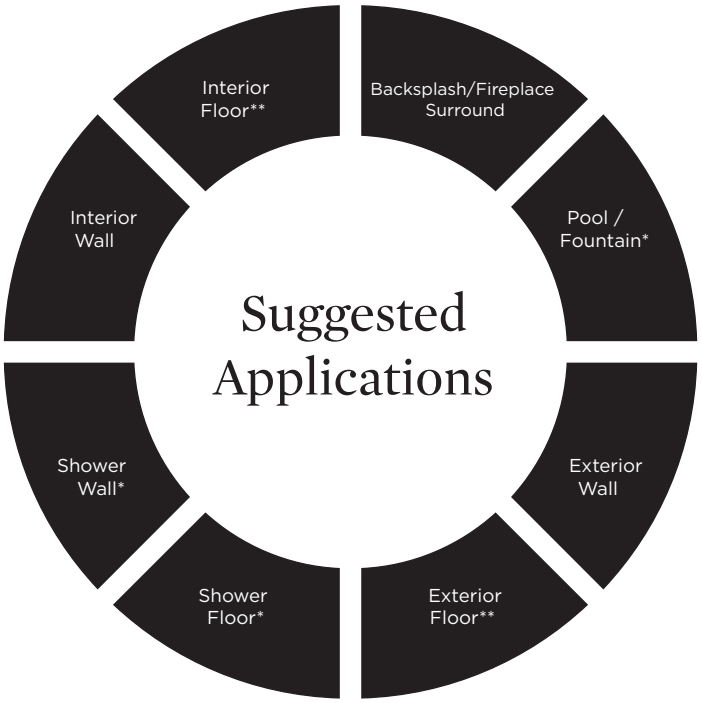

Recommended Use Not Recommended Use

Variation Level

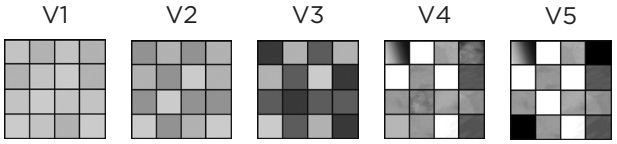

1. MINIMAL, IF ANY COLOR VARIATION
2. SLIGHT COLOR VARIATION CAN BE EXPECTED
3. A MEDIUM RANGE OF COLOR VARIATION IS TYPICAL; DARKER AND LIGHTER TONES ARE EVIDENT
4. CONSIDERABLE COLOR VARIATION IS TYPICAL; FROM DARKS TO LIGHTS AND SOME TONE CHANGES
5. EXTREME COLOR VARIATION CAN BE EXPECTED - THE RANGE IS OFTEN DIFFERING BUT COMPLEMENTARY

Thickness

*Nominal: +/- 1/8"

Suggested Grout Lines

1/16" - 1/8"

Application Notes

* Suitable for use in wet environments, including steam showers, if properly installed, sealed, and maintained

**Suitable for interior/exterior floors with light traffic ONLY

Installation / Maintenance

- WATERWORKS ASSUMES NO RESPONSIBILITY FOR INSTALLATION
- Installation constitutes acceptance.
- Tile should be installed by a licensed and experienced tile setter.
- Refer to TCNA (Tile Council of North America) or ANSI standards for installation guidelines.
- All tile must be inspected PRIOR to installation.
- Dry lay tile prior to installation to allow for blending of color variation.
- Pre-seal tile PRIOR to grouting to prevent staining. Dark grout can stain crackle tile.
- Waterworks recommends a grouted test panel prior to installation to understand final appearance of grouted materials
- Re-seal tile and grout after installation and maintain regularly.