

WATERWORKS

PRODUCT SUPPORT
800.927.2120
WATERWORKS.COM

UNIVERSAL

Wall Mounted Tub Spout With Diverter in
Chrome

STYLE No. UNTS38
REFERENCE No. WWTU38C
ITEM No. 09-41509-14990

SPECIFICATIONS
PAGE 1 OF 3

DESIGN

Our Universal collection features timeless designs complementing any of our Waterworks or Waterworks Studio families. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

FEATURES

Create a refined environment for your daily ritual by installing an exquisitely proportioned Universal tub spout with diverter functionality

This item is stocked in a Chrome, Nickel or Matte Nickel finishes and additional made-to-order finish options are available in 12 weeks from purchase

A clean, universal aesthetic is applicable to all bath environments (traditional to modern)

A diverter tub spout works seamlessly with Waterworks' Pressure Balance systems



SHOWN IN Shown in Chrome

WATERWORKS

PRODUCT SUPPORT
800.927.2120
WATERWORKS.COM

UNIVERSAL

Wall Mounted Tub Spout With Diverter in
Chrome

STYLE No. UNTS38


REFERENCE No. WWTU38C

ITEM No. 09-41509-14990



SPECIFICATIONS

PAGE 2 OF 3


All dimensions are based on original specifications and are subject to change and variation. Please consult your Design Associate for current specifications.

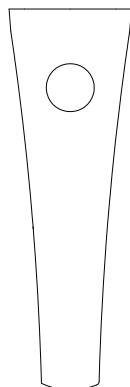

TOP VIEW SCALE: 3"=1'-0"

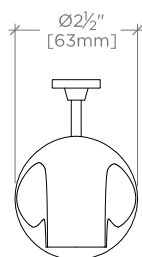

FRONT VIEW SCALE: 3"=1'-0"

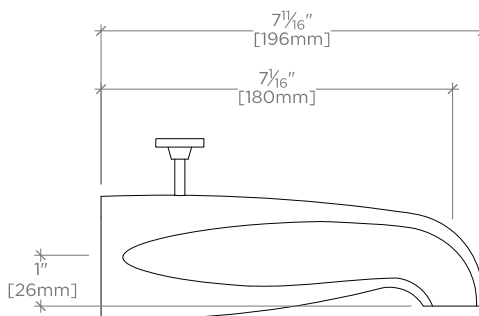

SIDE VIEW SCALE: 3"=1'-0"

WATERWORKS

PRODUCT SUPPORT
800.927.2120
WATERWORKS.COM

UNIVERSAL

Wall Mounted Tub Spout With Diverter in
Chrome

STYLE No. UNTS38
REFERENCE No. WWTU38C
ITEM No. 09-41509-14990

SPECIFICATIONS
PAGE 3 OF 3

SPECIFICATIONS

Primary Material: Brass
Inlet Connection Size: $\frac{3}{4}$ "
Inlet Connection Type: Female NPT
Maximum Water Pressure: 80 psi
Minimum Water Pressure: 20 psi
Fittings Hole Diameter: $1\frac{1}{4}$ "
Recommended Water Pressure: 45 psi

CARE INSTRUCTIONS

To clean the finish, wipe gently with a soft damp cloth and then with a soft dry towel. A mild soap solution can be used for daily cleaning.

CODES AND STANDARDS

ASME A112.18.1 / CSA B125.1, IAPMO, State of MA

FLOW RATE CURVE

REQUIRED PLUMBING DETAILS

Below is a list of choices that must be made to complete your lavatory faucet.