

WATERWORKS

PRODUCT SUPPORT
800.927.2120
WATERWORKS.COM

AMELIE

Bridge Concealed Tub Filler With Hand-shower and Metal Lever Handles in Chrome

STYLE No. 649708

REFERENCE No. AMTU10C

ITEM No. 09-97442-08208

SPECIFICATIONS
PAGE 1 OF 3

DESIGN

The ultimate in decorative, luxurious fittings with no apologies for its lack of restraint. Amelie offers curves, moldings and detailing combined to create an over-the-top effect which is luxurious, Old World and elegant.

FEATURES

Brass material is used for all trim and valve component parts.

The manufacturing process encompasses casting, turning, forging, hand-fitting and hand polishing.

The five spoke cross handle is reminiscent of rudder rods from old sailing ships.

Each handle is finished with a detailed, decorative finial.

An extensive range of fittings options for the lavatory, shower, and bathtub.



SHOWN IN Nickel

WATERWORKS

PRODUCT SUPPORT
800.927.2120
WATERWORKS.COM



AMELIE

Bridge Concealed Tub Filler With Hand-shower and Metal Lever Handles in Chrome

STYLE No. 649708
REFERENCE No. AMTU10C
ITEM No. 09-97442-08208

SPECIFICATIONS
PAGE 2 OF 3

All dimensions are based on original specifications and are subject to change and variation. Please consult your Design Associate for current specifications.

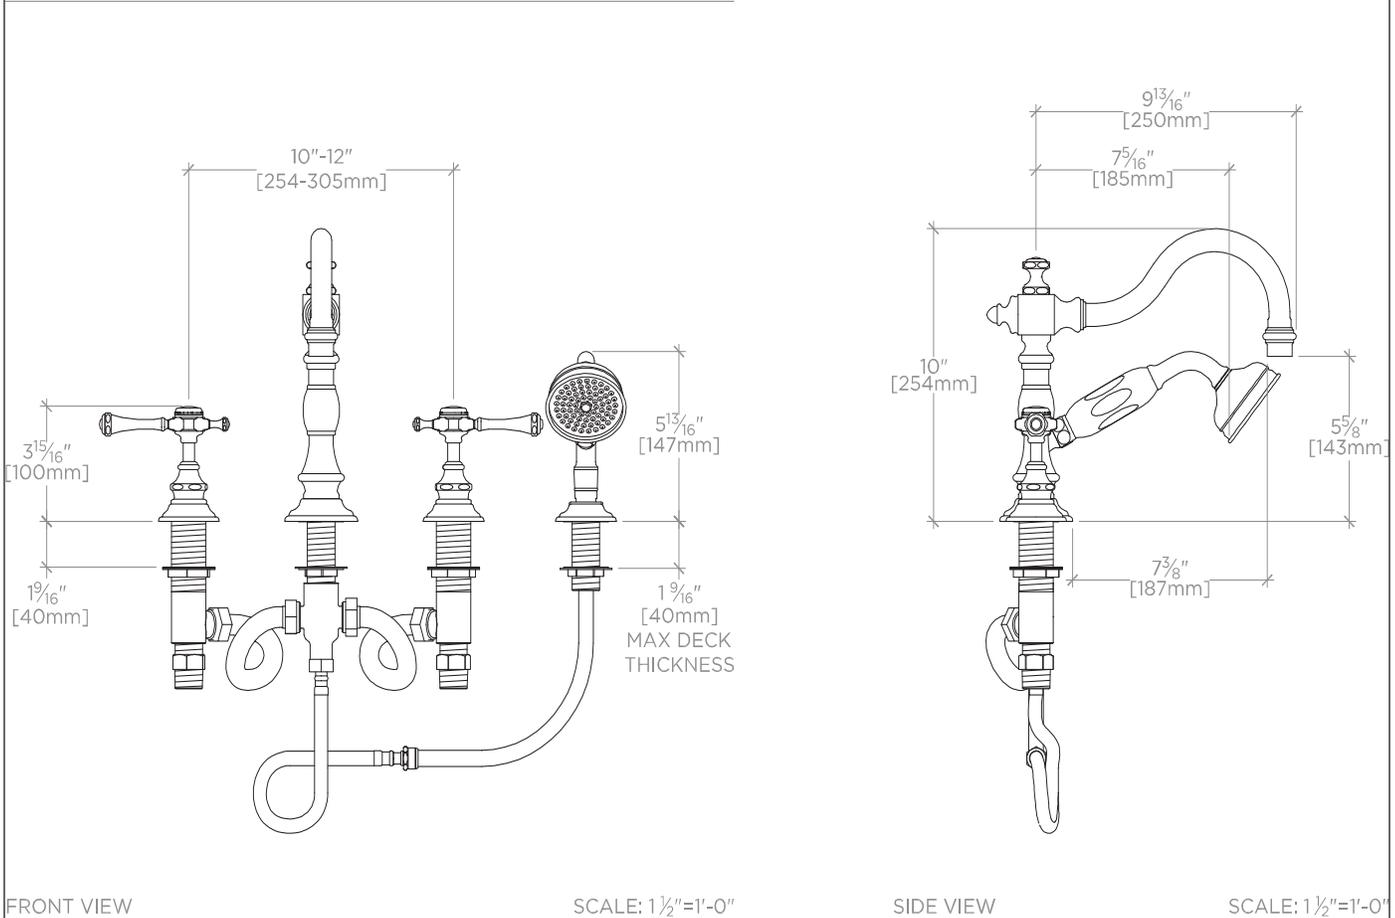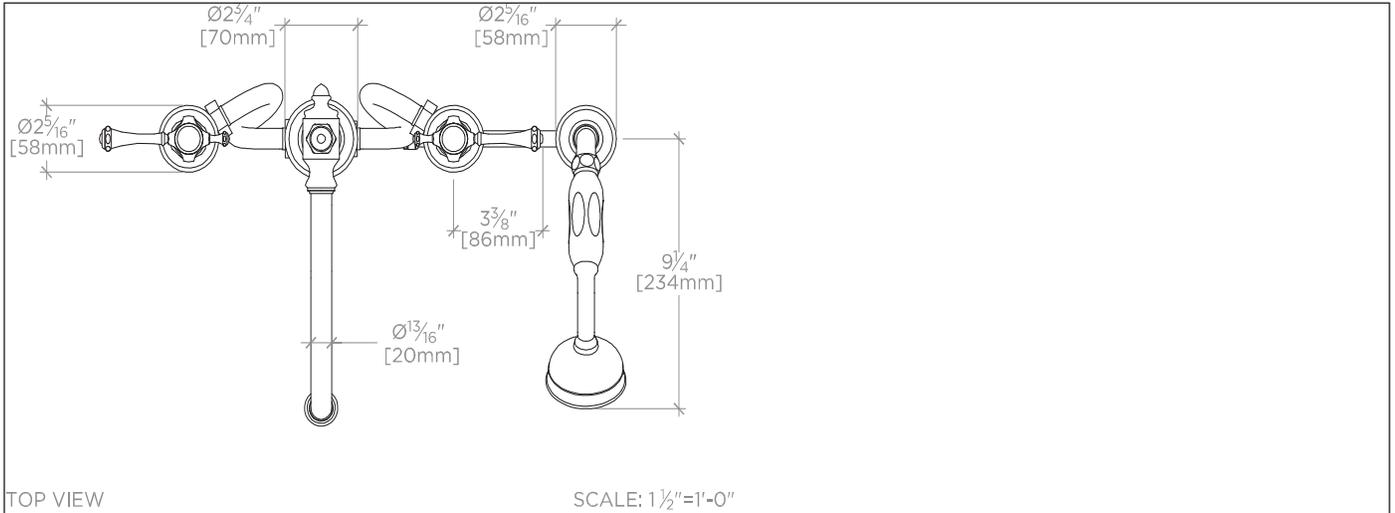

WATERWORKS

PRODUCT SUPPORT
800.927.2120
WATERWORKS.COM

AMELIE

Bridge Concealed Tub Filler With Hand-shower and Metal Lever Handles in Chrome

STYLE No. 649708
REFERENCE No. AMTU10C
ITEM No. 09-97442-08208

SPECIFICATIONS
PAGE 3 OF 3

SPECIFICATIONS

Primary Material: Brass
Handle Spread Maximum:
Handle Spread Minimum: 10"
Inlet Connection Size: $\frac{3}{4}$ "
Inlet Connection Type: Male NPT
Inlet Supply Spread Maximum:
Inlet Supply Spread Minimum: 10"
Maximum Deck Thickness: $1\frac{1}{2}$ "
Minimum Deck Thickness: 0"
Maximum Water Pressure: 80 psi
Minimum Water Pressure: 20 psi
Fittings Hole Diameter: $1\frac{3}{8}$ "
Recommended Water Pressure: 45 psi

CARE INSTRUCTIONS

To clean the finish, wipe gently with a soft damp cloth and then with a soft dry towel. A mild soap solution can be used for daily cleaning.

CODES AND STANDARDS

ASME A112.18.1, ASSE 1014, IAPMO, State of MA

FLOW RATE CURVE

REQUIRED PLUMBING DETAILS

Below is a list of choices that must be made to complete your lavatory faucet.