




ESTB. 1978

WATERWORKS

---

## Keelson

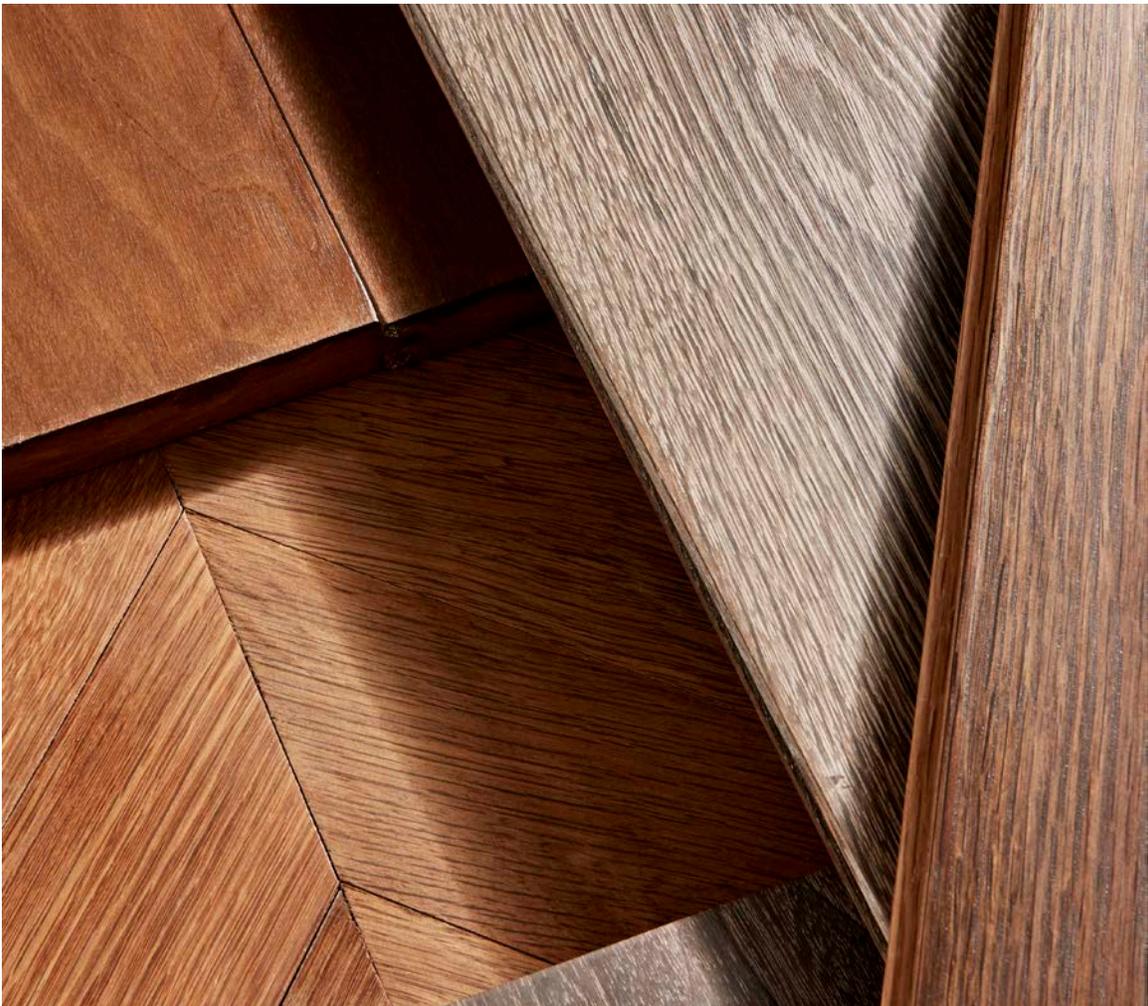

Hand-selected and environmentally harvested American Oak and Walnut timbers are cut into stunning wide planks to bring warmth and richness to the floor. A special fuming process creates a beautiful and harmonious surface appearance by enriching the natural grain of the wood. Available in a range of colors and finishes.



ESTB. 1978

# WATERWORKS

## Keelson


### PLANK




6" x Random Lengths Plank  
Flaw Sawn



8" x Random Lengths Plank  
Flaw Sawn

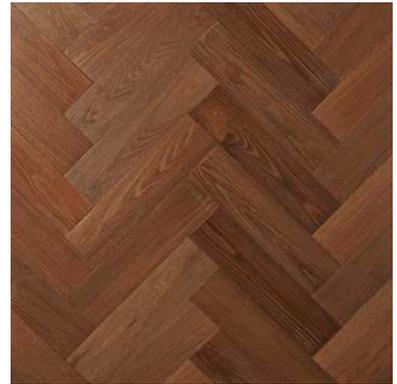

4" x 36" Plank (Herringbone\*)  
Flaw Sawn

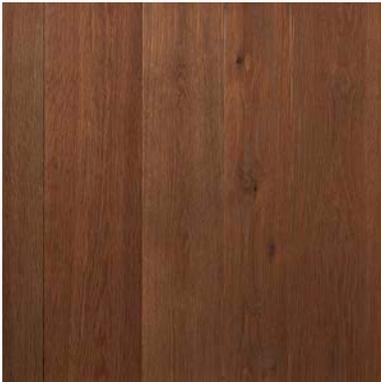

4" to 7" x Random  
Lengths Plank  
Flaw Sawn



6" to 10" x Random  
Lengths Plank  
Flaw Sawn



4" x 36" Plank (Chevron\*)  
Flaw Sawn

\* Herringbone and Chevron patterns created using 4" x 36" planks. Final layout/design created at installation.



ESTB. 1978

# WATERWORKS

## Keelson

### PALETTE\*



Barley Oak V3-V4



Brewster Oak V3-V4



Chestnut Oak V3-V4



Gris Oak V3-V4



Hawk Oak V3-V4



Lark Oak V3-V4



Mink Walnut V3-V4



Nutmeg Walnut V3-V4



Peat Oak V3-V4



Portland Walnut V3-V4



Sable Walnut V3-V4



Sienna Oak V3-V4

\* All colors shown are flat sawn except Lark Oak and Chestnut Oak which are quarter sawn.


\*\* See Variation chart on next page



ESTB. 1978

# WATERWORKS

## Keelson

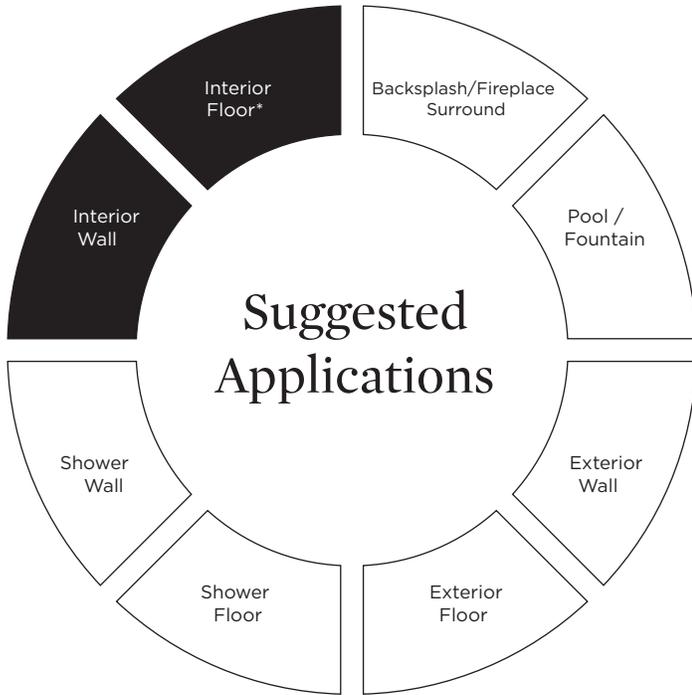

● Recommended Use      ○ Not Recommended Use


### Application Notes

\* Keelson can be used in bathrooms, but care should be taken to wipe up any water immediately. For basements or areas with high humidity, please consult your installer. For commercial applications, please inquire.

### Installation / Maintenance

- WATERWORKS ASSUMES NO RESPONSIBILITY FOR INSTALLATION
- **IMPORTANT: WOOD NEEDS TO ACCLIMATE TO ENVIRONMENT UP TO 2 WEEKS PRIOR TO INSTALLATION**
- Installation constitutes acceptance.
- Wood should be installed by a licensed and experienced installer with knowledge and experience in finishing fumed oak or walnut.
- Refer to NWFA standards for installation guidelines.
- All material must be inspected PRIOR to installation.
- Waterworks recommends an acclimated and stained control panel prior to installation to understand final appearance

### Variation Level

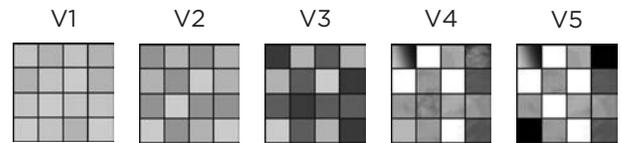

1. MINIMAL, IF ANY COLOR VARIATION
2. SLIGHT COLOR VARIATION CAN BE EXPECTED
3. A MEDIUM RANGE OF COLOR VARIATION IS TYPICAL; DARKER AND LIGHTER TONES ARE EVIDENT
4. CONSIDERABLE COLOR VARIATION IS TYPICAL; FROM DARKS TO LIGHTS AND SOME TONE CHANGES
5. EXTREME COLOR VARIATION CAN BE EXPECTED - THE RANGE IS OFTEN DIFFERING BUT COMPLEMENTARY

### Thickness



\*Nominal: +/- 1/8"