




Striking. Stylish. And equally transformative on walls and floors.

Referencing classic wood designs, our MasterPiece styles are precisely engineered to capture the beauty of stone with an unexpected interplay of its veining and shadings. Natural variations in the stone lend the patterns an artful quality. Designs can be scaled up or down, letting you personalize a space of any size.




### MOSAIC

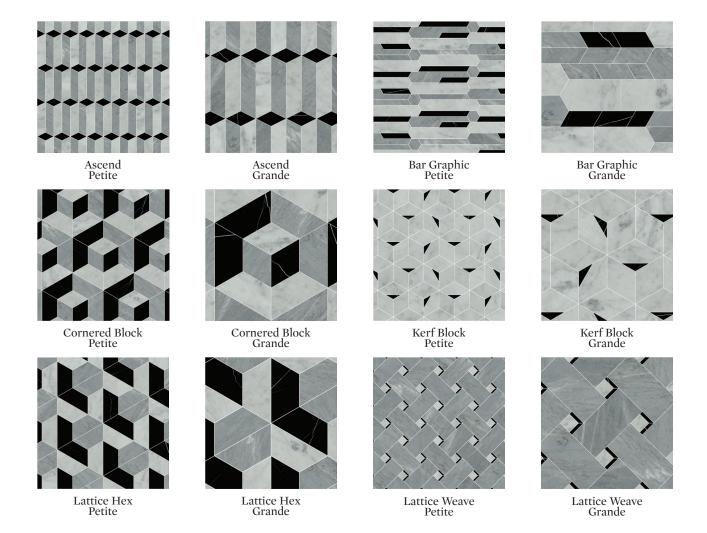




### MOSAIC

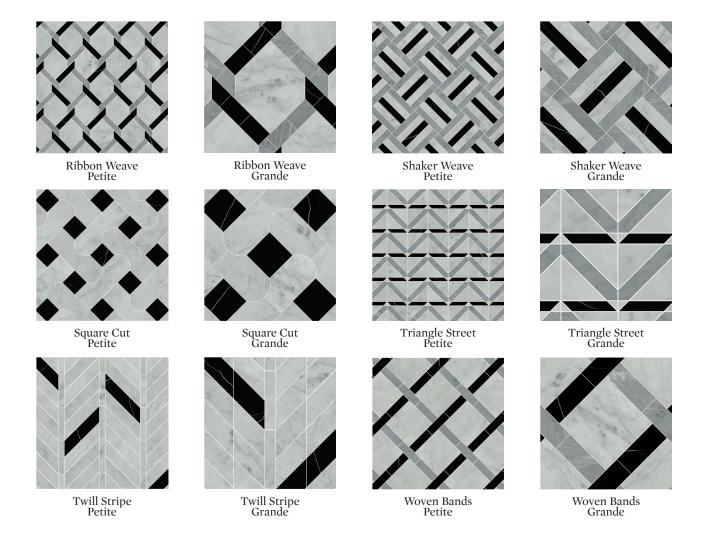




### PALETTE

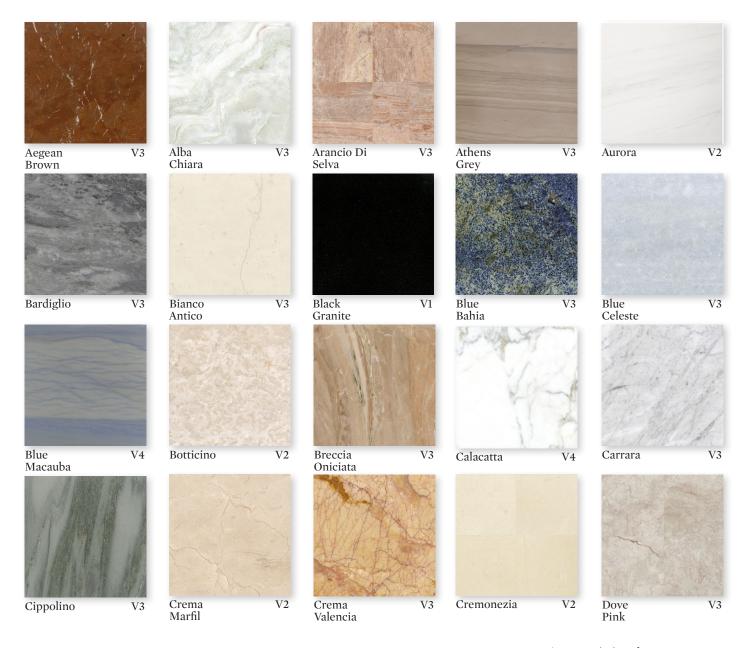

<sup>\*</sup> See variation chart on page 8




PALETTE

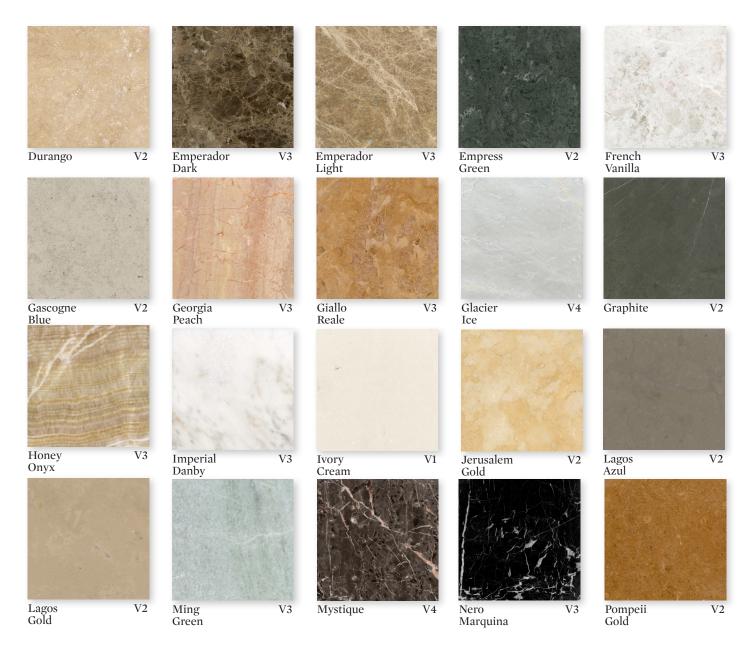

<sup>\*</sup> See variation chart on page 8



PALETTE

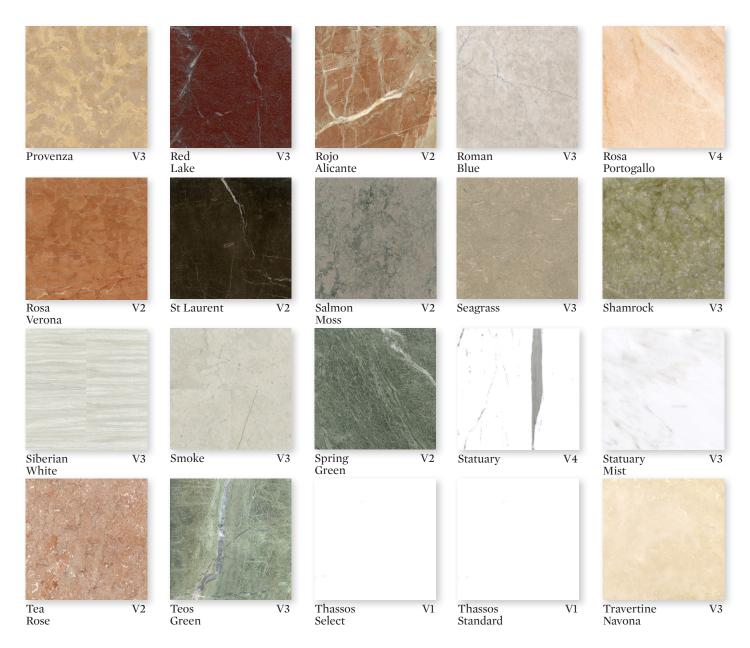

<sup>\*</sup> See variation chart on page 8



PALETTE












\* See variation chart on page 8




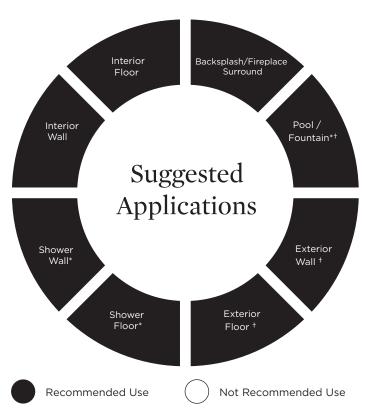

# V1 V2 V3 V4 V5 1. MINIMAL, IF ANY COLOR VARIATION 2. SLIGHT COLOR VARIATION CAN BE EXPECTED 3. A MEDIUM RANGE OF COLOR VARIATION IS TYPICAL; DARKER AND LIGHTER TONES ARE EVIDENT 4. CONSIDERABLE COLOR VARIATION IS TYPICAL; FROM DARKS TO LIGHTS AND SOME TONE CHANGES 5. EXTREME COLOR VARIATION CAN BE EXPECTED - THE RANGE IS OFTEN DIFFERING BUT COMPLEMENTARY

### **Application Notes**

- \* Various stones are suitable for use in wet environments, including steam showers, if properly installed, sealed, and maintained. Please inquire.
- <sup>†</sup> Some stones are suitable in tropical/subtropical climates. Testing may be required. Please inquire.



### Suggested Grout Lines

Varies-Please follow mosaic sheet

### Installation / Maintenance

- WATERWORKS ASSUMES NO RESPONSIBILITY FOR INSTALLATION
- · Installation constitutes acceptance.
- Mosaic should be installed by a licensed and experienced tile setter.
- Refer to TCNA (Tile Council of North America) or ANSI standards for installation guidelines.
- All mosaics must be inspected PRIOR to installation.
- Dry lay mosaics prior to installation to allow for blending of color variation.
- Stone must be sealed before grout installation to allow grout to release and prevent staining.
- · Stone and grout should be sealed after installation and maintained regularly.