



PORTLANDIA features a harmonious blend of terrazzo and solid cement tiles. Handcrafted by Italian artisans in a range of sizes and finishes, they give walls and floors a cool, urbane look.



SOLID FIELD TILE



4" X 4" \*



8" X 8" \*



8" Hex\*



#### WATERWORKS

## Portlandia

#### SOLID PALETTE







#### TERRAZZO PICCOLO FIELD TILE



8" X 8" \*



16" X 16" \*\*



TERRAZZO PICCOLO FIELD TILE



24" X 24" \*\*

\*\*3/4" thick



#### TERRAZZO PICCOLO PALETTE





TERRAZZO MEZZO FIELD TILE



16" X 16" \*\*




TERRAZZO MEZZO FIELD TILE



24" X 24" \*\*



#### TERRRAZZO MEZZO PALETTE











\* See variation chart on page 4
\*\* Available in Antiqued, Honed and Polished Finishes




TERRAZZO LISCIA FIELD TILE



16" X 16" \*\*



TERRAZZO LISCIA FIELD TILE

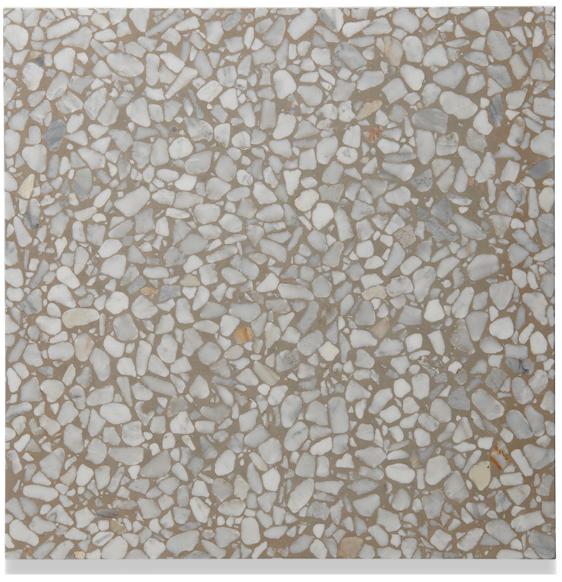

24" X 24" \*\*

\*\*3/4" thick




#### TERRRAZZO LISCIA PALETTE











Carlisle\*\* V4\*

Wi

Windsor\*\* V4\*

Tribeca\*\* V4\*



#### TERRAZZO ARMONIA FIELD TILE



16" X 16" \*\*



#### TERRAZZO ARMONIA FIELD TILE



24" X 24" \*\*




#### TERRRAZZO ARMONIA PALETTE









Ellsworth\*\*

Flint\*\*


Suffield\*\* V4\*


Windsor\*\* V4\*



#### WATERWORKS

#### Portlandia

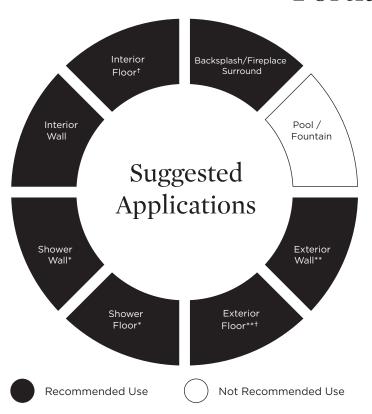


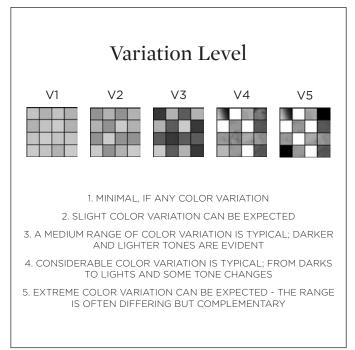

#### **Application Notes**

- \* Suitable for use in wet environments, including steam showers, if properly installed, sealed, and maintained
- \*\* All styles suitable for exterior use in tropical/subtropical climate. Piccolo, Armonia, Liscia and Mezzo are suitable for use in feeze/thaw climates.
- <sup>†</sup> For commercial applications, please inquire

# Thickness - 1/2"-3/4\* \*Nominal: +/- 1/8"



#### Installation / Maintenance

- WATERWORKS ASSUMES NO RESPONSIBILITY FOR INSTALLATION
- Installation constitutes acceptance.
- Tile should be installed by a licensed and experienced tile setter.
- Refer to TCNA (Tile Council of North America) or ANSI standards for installation guidelines.
- All tile must be inspected PRIOR to installation.
- Dry lay tile prior to installation to allow for blending of color variation.
- Tile should be sealed PRIOR to grouting. Dark grout can stain crackle tile.
- Waterworks recommends a grouted test panel prior to installation to understand final appearance of grouted materials
- Re-seal tile and grout after installation and maintain regularly.