


ELTU 52 / ELTU 22 deck mount

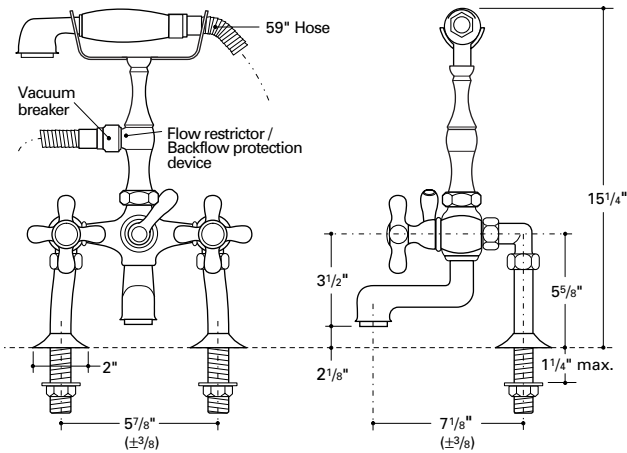

Note: Drilling hole size: 1 1/4"

Inlets 3/4" straight male threads
NPT adaptors provided

Vacuum breaker provided

When using in conjunction with the
freestanding legs (NFTU 32) you must
specify the ETTU 90 deck unions
in place of the ELTU 22 deck unions

Consult your local building codes
for anti-scald requirements

INSTALLATION GUIDELINES

- Use only a protected, smooth-jawed, or strap wrench on any finished surface.
- The mounting should be at 57 7/8" (±3/8").
- 1 1/4" drilling for the mounting holes is recommended.
- Run 3/4" supply lines for maximum water flow.
- Accessible shut-off valves, which will facilitate servicing, are recommended for the hot and cold feed lines.
- Using a 3/4" copper x female adapter; attach supply lines to the bottom of the unions.
- Be sure the gaskets are in place at all joints. Also, be sure the connections are tightened.
- With the diverter lever to the left, turn on the water fully to flush out the lines through the spout before transferring the flow to the handshower.
- Check for leaks at all the joints.
- For servicing valve stem: Pull out index assembly (held in place by friction O-ring), exposing a screw for the handle. The cover should be hand tight.
- NOTE: After use, the diverter lever may be positioned vertically to quickly drain the residual water from the unit. After draining, reposition the lever to the left for the next use.
- If further assistance is required, please contact Product Support at 1-800-927-2120 (8am–7pm EST).

The tub filler with deck mount unions is designed for mounting on the rim of the tub itself. If mounted beyond the rim, the spout will not project far enough into the tub and may splash. Proper mounting to project into the tub will also collect water drips from the handshower.