

UNIVERSAL

Universal 1/2" Thermostatic Valve

GUTH56



SHOWN IN 1/2" THERMOSTATIC CONTROL VALVE ROUGH

TECHNICAL DETAILS

Fittings Hole Diameter: 4 1/2"

Inlet Connection Size: 1/2"

Inlet Connection Type: Female NPT

Outlet Connection Size: 1/2"

Outlet Connection Type: Female NPT

Primary Material: Brass

Safety Warnings: This valve features anti-scald protection. The risk of scalding exists until the installer has properly calibrated/adjusted the temperature setting prior to final trim installation.

Suggested Application: Bath

Valve Material: Wax Element

Water Pressure Maximum: 80.0 psi

Water Pressure Minimum: 20.0 psi

Water Pressure Recommended: 45.0 psi

INSPIRATION

Our Universal collection features timeless designs complementing any of our Waterworks or Waterworks Studio families. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

CODES & STANDARDS

Code # GUSV56:

PRODUCT FEATURES

For use with Waterworks Studio Thermostatic system trims
1/2" NPT female inlet and outlet with quarter turn functionality
7 gpm unrestricted maximum flow at 45 psi
Made of brass materials

CERTIFICATIONS




PRODUCT (NOTES)

This valve features anti-scald protection. The risk of scalding exists until the installer has properly calibrated/adjusted the temperature setting prior to final trim installation.

UNIVERSAL



Universal 1/2" Thermostatic Valve

GUTH56

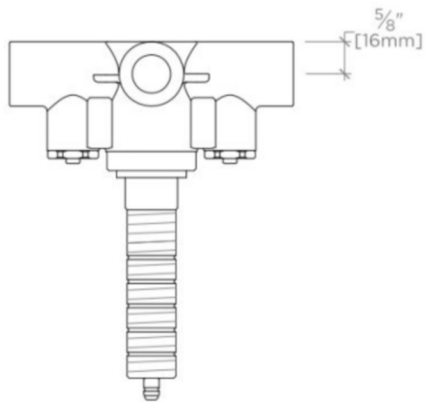


TOP VIEW

SCALE: 3"=1'-0"

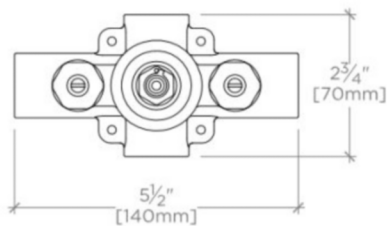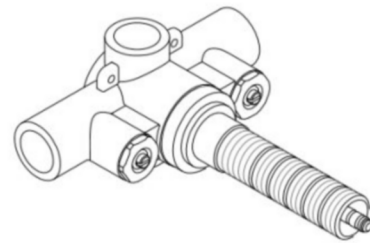

FRONT VIEW

SCALE: 3"=1'-0"

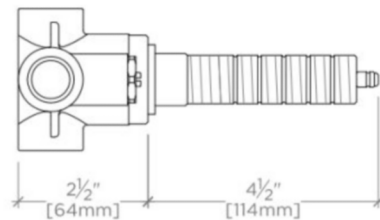

SIDE VIEW

SCALE: 3"=1'-0"