


**Style No. SILT03 [SI03LT]**  
Ceiling Mounted Small  
Pendant

**Style No. SILT04 [SI04LT]**  
Ceiling Mounted Large  
Pendant

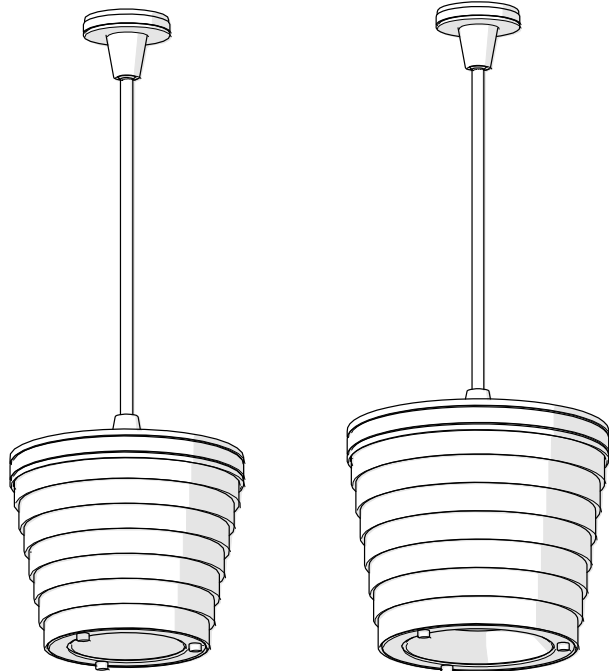

\* All items in [BRACKETS] refer to UK styles

## SPECIFICATIONS:

Weight of SILT03 [SI03LT]: 35 lbs

Weight of SILT04 [SI04LT]: 45 lbs

Bulb Base Size: LED

Bulb Type: COB

Junction Box Orientation: Any

Junction Box Size: Standard 3-1/2"

Max Wattage: 12 Watt

Orientation: Ceiling Only

Shade Material: Acrylic

Voltage: 120 [240]

Required Electrical Feeds:

US: Black "Hot" wire; White "Neutral" wire; Green or Bare "Ground" wire

UK: [Brown "Line" wire; Blue "Neutral" wire; Green/Yellow Striped or Bare "Earth" wire]


## IMPORTANT:

- Lights are extremely heavy. Recommended 2 - 3 person installation.
- **WARNING:** The power supply must be turned off prior to installation. Turn off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is not sufficient.
- To ensure this product is installed properly, you must read and follow these guidelines.
- The owner/user of this product must keep this information for future reference.

- SILT03 and SILT04 are U.L. certified and are suitable for damp or dry locations. The U.L. listing mark can be found on the inside of the cover plate.
- SI03LT and SI04LT are CE rated. Proof of CE compliance will be provided upon request.
- Be sure your installation conforms to all federal, state, and local codes.
- This product must be installed by a professional licensed electrical contractor.
- Refer to the specification and assembly drawings attached. Product is sold partially assembled but shown fully disassembled for illustrative and service purpose only.
- Max wattage for SILT03 [SI03LT] and SILT04 [SI04LT] is 12 watts for LED light.

## PENDANT INSTALLATION:

- **REQUIRED:** Install a 3-1/2" octagonal electrical junction box at the desired location.
- See Figure - 01 for Step 1.



**FIGURE - 01**

1. To adjust the height of the light fixture, add or remove the included tube linkages until the desired height is achieved.
- See Figure - 02 for Steps 2 - 4.

These guidelines have been prepared for the professional contractor to aid in the installation of:  
**SIGNAL CEILING MOUNTED SMALL PENDANT (STYLE No. SILT03 [SI03LT]) & SIGNAL CEILING MOUNTED LARGE PENDANT (STYLE No. SILT04 [SI04LT])**  
All dimensions are based on original specification and are subject to change and variation.  
Please consult your Design Associate for current specifications.

# WATERWORKS

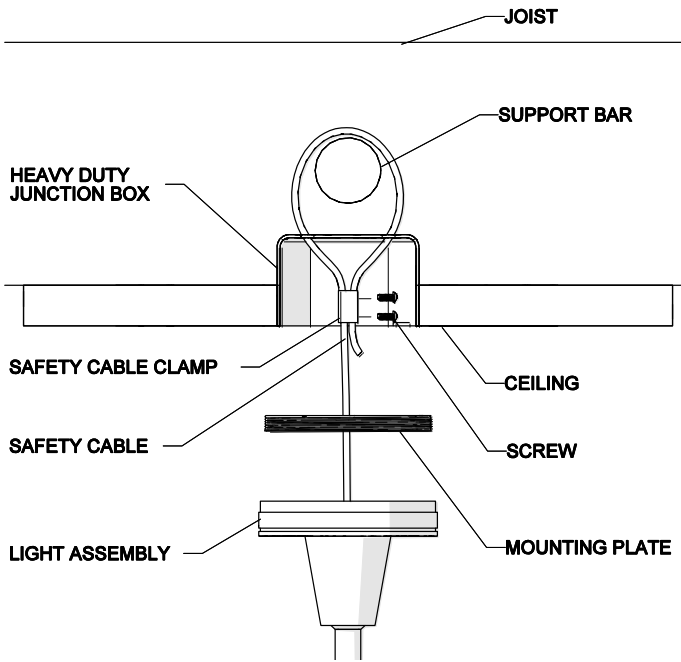


FIGURE - 02

2. Remove the SCREWS from the SAFTY CLAMP and loop the SAFTY CABLE around the SUPPORT BAR and back through the JUNCTION BOX. Reinstall SCREWS to tighten cable and cut excess.

➤ See Figure - 03 for Steps 3 - 6.

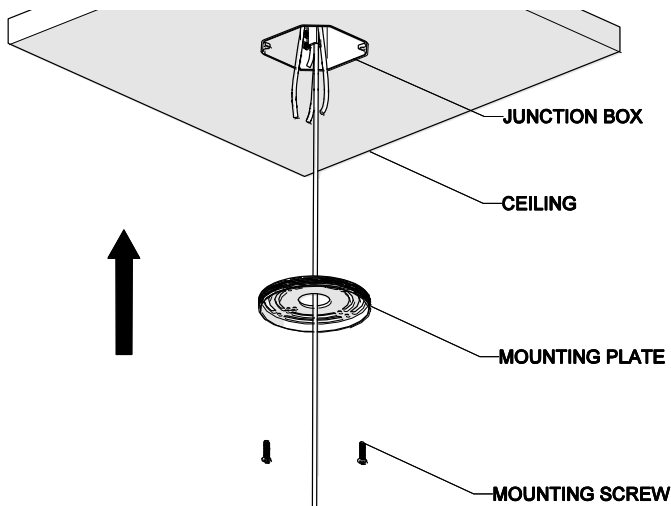


FIGURE - 03

3. Pull the wires in the JUNCTION BOX through the center of the MOUNTING PLATE. Attach the MOUNTING PLATE to the JUNCTION BOX using the MOUNTING SCREWS making sure to keep the proper alignment of the plate.

4. Fasten the bare copper fixture wire to the green or bare copper wire in the box with a wire nut or fasten it to the MOUNTING PLATE with the ground screw provided.
5. Fasten the white fixture wire to the white wire in the box with a wire nut. Tightly wrap the connection with electrical tape beginning 1" [25mm] below the wire nut to ensure the tape seals the end of the nut. Make sure that there are no exposed wires that could cause a short circuit.
6. Repeat previous step with the black fixture wire and the black wire from the junction box. Make sure the wires are pushed into the junction box.

➤ See Figure - 04 for Step 7.

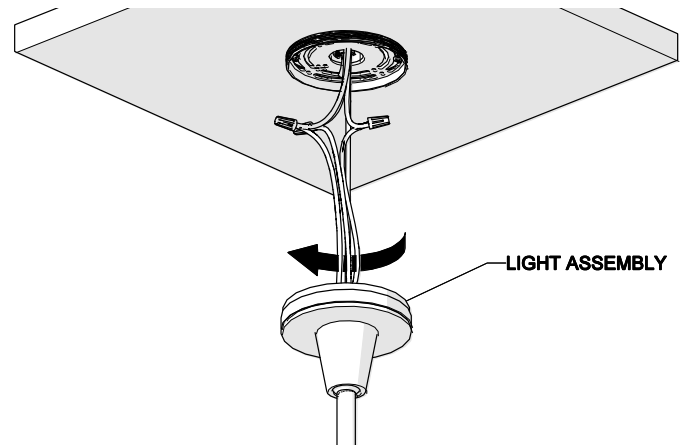


FIGURE - 04

7. Thread the LIGHT ASSEMBLY to the MOUNTING PLATE by turning the LIGHT ASSEMBLY clockwise making sure it's secure.

These guidelines have been prepared for the professional contractor to aid in the installation of:  
SIGNAL CEILING MOUNTED SMALL PENDANT (STYLE No. SILT03 [SI03LT]) & SIGNAL CEILING MOUNTED LARGE  
PENDANT (STYLE No. SILT04 [SI04LT])  
All dimensions are based on original specification and are subject to change and variation.  
Please consult your Design Associate for current specifications.

**WATERWORKS**

## SERVICING THE LIGHT:

- See Figure - 05 for Step 8.
- 8. Unscrew the THREADED RODS and remove the SHADE to gain access to the BULB for cleaning and servicing.
- If further assistance is required, please contact Product Support at 1-800-927-2120 (8am-6pm EST).

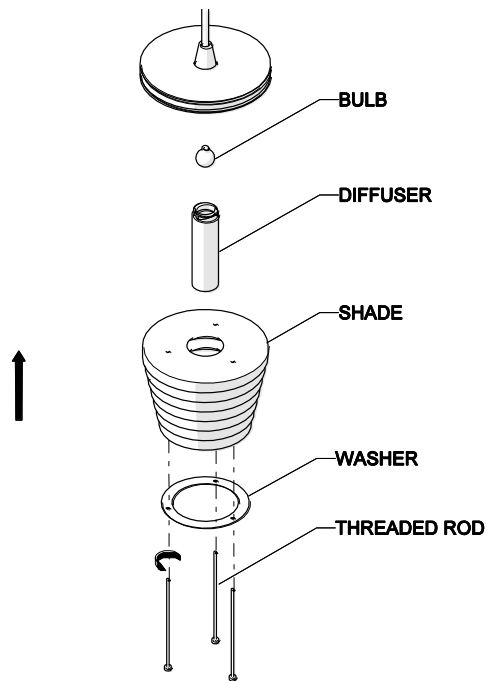


FIGURE - 05

These guidelines have been prepared for the professional contractor to aid in the installation of:  
SIGNAL CEILING MOUNTED SMALL PENDANT (STYLE No. SILT03 [SI03LT]) & SIGNAL CEILING MOUNTED LARGE  
PENDANT (STYLE No. SILT04 [SI04LT])  
All dimensions are based on original specification and are subject to change and variation.  
Please consult your Design Associate for current specifications.

# WATERWORKS