

OPUS

Opus Wall Mounted Tub Spout

OP82TS



SHOWN IN OPUS WALL MOUNTED TUB SPOUT| OPTS82

TECHNICAL DETAILS

Adjustable versus Fixed Spray: Fixed Spray
Fittings Hole Diameter: 35 mm
Depth / Width: 203 mm
Height: 76 mm
Inlet Connection Size: 3/4"
Inlet Connection Type: Male G/BSPP
Installation Type: Wall Mounted
Length: 76 mm
Primary Material: Brass
Spout Reach: 7 1/2"
Spout Swivel: N
Suggested Application: Bath
Water Pressure Maximum: 5.5 bar
Water Pressure Minimum: 1.5 bar
Water Pressure Recommended: 3.0 bar

INSPIRATION

Opus incorporates a range of sophisticated aesthetic notes, with graceful curves that create a jewel-like refinement.

CODES & STANDARDS

Code # : ASME A112.18.1, CSA B125

PRODUCT FEATURES

Brass material is used for trim and valve component parts.

The manufacturing process encompasses casting, turning, stamping, hand-fitting and hand polishing.

Eased curves and reflective forms carry the message of cleanliness and clarity.


An extensive range of fittings, fixture and accessory options for the lavatory, shower, bathtub.

OPUS


Opus Wall Mounted Tub Spout

OP82TS


ADAPTER(S) PACKAGED SEPARATELY		
ADAPTER	DESCRIPTION	QTY
UNUK06	3/4" NPT Male x 3/4" Male Nipple 50mm Long BSP	1

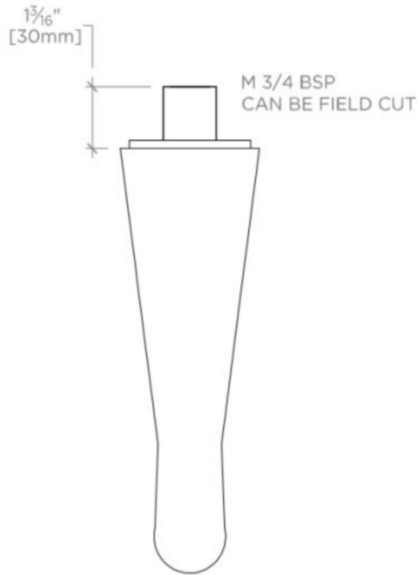

TOP VIEW SCALE: 3"=1'-0"



FRONT VIEW SCALE: 3"=1'-0"

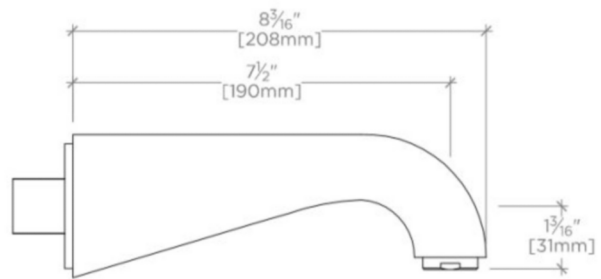

SIDE VIEW SCALE: 3"=1'-0"