
EASTON EALS50

Easton Classic Low Profile Three Hole Wall Mounted Lavatory Faucet with Elongated Spout and Oak Lever Handles

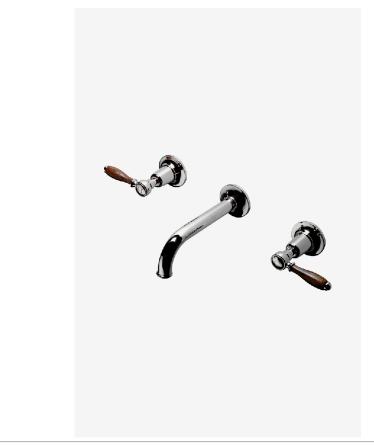

TECHNICAL DETAILS

ADA Compliance: Yes

Adjustable Versus Fixed Spray: Fixed Spray

Depth/Width: 6 1/2"

Drain Assembly Materials: Brass Drain Depth Maximum: 2 3/4" Drain Depth Minimum: 1" Drain Hole Diameter: 1 3/4" Fittings Hole Diameter: 1 3/8" Handle Spread Maximum: 8" Handle Spread Minimum: 8" Handle Turn Angle: Quarter Turn

Height: 3"

Index Color Finish And Material: White Porcelain

Inlet Connection Size: 1/2" Inlet Connection Type: Male NPT Inlet Supply Spread Maximum: 8" Inlet Supply Spread Minimum: 8" Installation Type: Wall Mounted

Length: 15"

Number Of Holes: Three Hole

Primary Material: Brass Restricted Maximum Flow Rate: 1.2 gpm

Spout Swivel: N

Suggested Application: Bath Valve Material: Ceramic

Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

SHOWN IN EASTON CLASSIC LOW PROFILE THREE HOLE WALL MOUNTED LAVATORY FAUCET WITH ELONGATED SPOUT AND OAK LEVER HANDLES \mid EALS50

INSPIRATION

Drawing on Edwardian style, Easton is the most extensive Waterworks family; a range of moods and a selection of products from fittings to furniture.

CODES & STANDARDS

Code # EALS50: CEC

PRODUCT FEATURES

Available in 1.2gpm (4.5L/min) flow rate

CERTIFICATIONS





PRODUCT (NOTES)

Sold with European style drain; USA style drain sold separately for use with non-Waterworks sinks.

WATERWORKS

EASTON Easton Classic Low Profile Three Hole Wall Mounted Lavatory Faucet with Elongated Spout and Oak Lever Handles	EALS50