


Style No. ISSH10

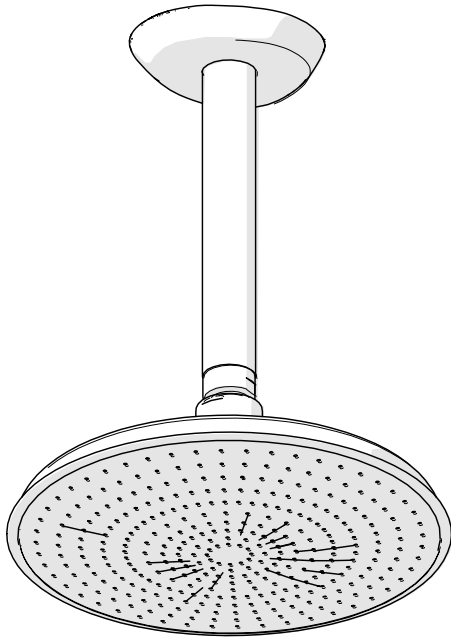

SPECIFICATIONS:

Adjustable versus Fixed Spray: Fixed Spray
Diameter of Head: 7-7/8" [200mm]
Fittings Hole Diameter: 1-1/4" [32mm]
Inlet Connection Size & Type: 1/2" Male NPT
Pivot: Yes
Restricted Maximum Flow Rate: 2.5gpm [9.5L/min]
Water Pressure: 20psi [1.5bar] Min - 85psi [6.0bar] Max
Water Pressure Recommended: 45psi [3.1 bar]

IMPORTANT:

- A diverter or wall valve (sold separately) control on/off/volume and must be installed for each fitting that will have water flowing to it.
- To ensure this product is installed properly, you must read and follow these guidelines.
- The owner/user of this product must keep this information for future reference.
- This product must be on-site prior to rough-in. This allows the installer to visualize the installation.
- This product must be installed by a professional licensed contractor. Be sure your installation conforms to federal, state, and local codes. In the State of Massachusetts, all installations must comply with the rules and regulations set forth within 248 CMR.
- Inspect this product to ensure you have all the parts required for proper installation.
- Use only a strap wrench or protected/smooth-jaw wrench on any finished surface.

- The use of certain plumber's putty may stain stone or tile surfaces.

ROUGH-IN:

1. Determine the ideal location for the SHOWER HEAD and install 1/2" FEMALE ELBOW (not supplied). See Figure - 01.

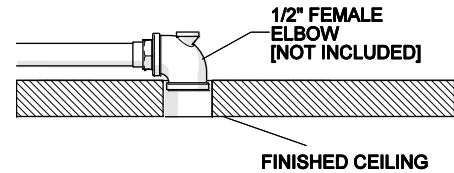


FIGURE - 01

SHOWER HEAD INSTALLATION:

- See Figure - 02 for Steps 2 - 4.

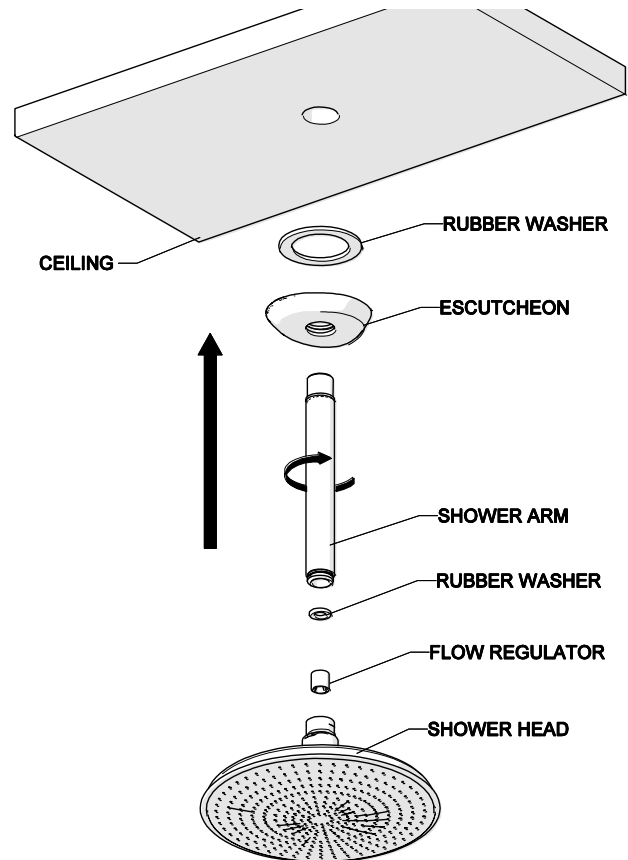


FIGURE - 02

2. Slide the ESCUTCHEON and RUBBER WASHER down the SHOWER ARM then thread and securely tighten the ARM into the 1/2" FEMALE ELBOW (not supplied).
3. Turn on the water supply and a diverter or wall valve (sold separately) to flush out any debris in the supply line then turn the water off.

These guidelines have been prepared for the professional contractor to aid in the installation of:
ISLA CEILING MOUNTED SHOWER HEAD, ARM AND FLANGE (STYLE No. ISSH10).
All dimensions are based on original specification and are subject to change and variation.
Please consult your Design Associate for current specifications.

WATERWORKS

4. Thread the PIVOT JOINT on the SHOWER HEAD onto the SHOWER ARM making sure to use the RUBBER WASHER provided. Securely tighten the PIVOT JOINT.

➤ NOTE: A 2.5gpm FLOW REGULATOR is located inside the PIVOT JOINT.

INSPECT AND FINISH THE INSTALLATION:

5. Turn the water on and inspect all connections for leaks.

6. Ensure the SHOWER HEAD pivots properly then turn the water off.

7. Slide the ESCUTCHEON up the SHOWER ARM until it contacts the finished ceiling.

➤ NOTE: A RUBBER WASHER for the ESCUTCHEON is provided. If desired, a bead of caulk or a clear silicone may be applied where the ESCUTCHEON contacts the finished ceiling. The use of certain plumber's putty may stain stone or tile surfaces.

➤ If further assistance is required, please contact Product Support at 1-800-927-2120 Monday through Friday, 8am - 6pm EST.

➤ Refer to the separate Service Parts Documents for available replacement parts.

These guidelines have been prepared for the professional contractor to aid in the installation of:
ISLA CEILING MOUNTED SHOWER HEAD, ARM AND FLANGE (STYLE No. ISSH10).
All dimensions are based on original specification and are subject to change and variation.
Please consult your Design Associate for current specifications.

W A T E R W O R K S