
WATERWORKS

EASTON EAHS32

Easton Classic Handshower with Diverter and Metal Lever Handle

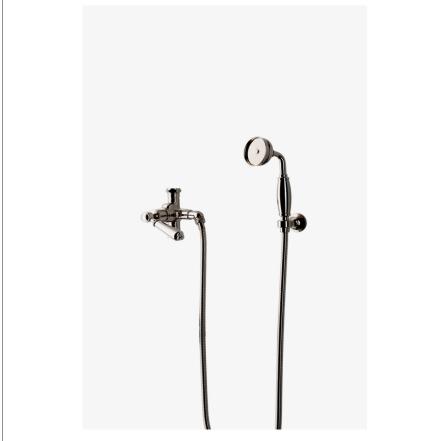

TECHNICAL DETAILS

ADA Compliance: No Adjustable versus Fixed Spray: Fixed Spray Diameter of Head: 3 1/16" Escutcheon Primary Material: Brass Fittings Hole Diameter: 1 3/8" Handshower / Spray Hose Length: 59" Depth / Width: 6" Height: 9 1/2" Inlet Connection Size: 1/2" Inlet Connection Type: Compression Installation Type: Wall Mounted Integrated Diverter: N Length: 14" Pivot: N Primary Material: Brass Restricted Maximum Flow Rate: 2.5 gpm Suggested Application: Bath Water Pressure Maximum: 75.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

L SHOWN IN EASTON CLASSIC HANDSHOWER WITH DIVERTER AND METAL LEVER HANDLE| EAHS32

INSPIRATION

Drawing on Edwardian style, Easton is the most extensive Waterworks family; a range of moods and a selection of products from fittings to furniture.

CODES & STANDARDS

Code # EAHS32: ASME A112.18.1 / CSA B125.1, IAPMO, State of MA, CEC

PRODUCT FEATURES

Optional handle materials include porcelain and semi-precious stones.

 $The \ manufacturing \ process \ encompasses \ casting, \ turning, forging, \ hand-fitting \ and \ hand \ polishing.$

The pillowed propeller on the cross handle makes the product fit comfortably in the hand.

Standard flow rate is 2.5gpm (9.5 L/min). Also available in high efficient flow options. Contact your sales associate or call 1 (800) 899-6757 for details.

CERTIFICATIONS



EASTON EAHS32

Easton Classic Handshower with Diverter and Metal Lever Handle

