

HENRY

Henry One Hole Gooseneck Kitchen Faucet, Metal Lever Handle

HNKM15



SHOWN IN HENRY ONE HOLE GOOSENECK KITCHEN FAUCET, METAL LEVER HANDLE| HNKM15

TECHNICAL DETAILS

ADA Compliance: Yes
Deck Thickness Maximum: 1 5/8"
Deck Thickness Minimum: 1/4"
Escutcheon Primary Material: Brass
Fittings Hole Diameter: 1 1/2"
Flow Restriction Options: 2.0, 1.75, 1.5
Handle Turn Angle: Quarter Turn Each Way
Handshower / Spray Hose Length: 49"
Depth / Width: 11 3/4"
Height: 14 5/8"
Inlet Connection Size: 3/8"
Inlet Connection Type: Compression Connector Hoses
Integrated Diverter: N
Length: 11 3/4"
Number of Holes: One Hole
Primary Material: Brass
Restricted Maximum Flow Rate: 2.2 gpm
Spout Swivel: Y
Spray Included in Unit: N
Suggested Application: Bar, Kitchen, Laundry
Valve Material: Ceramic
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Influenced by the connection of industry and art Henry easily transitions between modern, traditional, utilitarian and classic settings.

CODES & STANDARDS

Code # HNKM15: CEC

PRODUCT FEATURES

The stately single hole fitting stands on a tall well formed pillar with a tapered lever handle. Practical as well as beautiful, this fitting has a hand spray for washing vegetables, rinsing the sink or cleaning pots.

Brass material is used for components.

Standard flow rate is 2.2gpm (8.3 L/min) and State of California requires a maximum of 1.8gpm(6.8 L/min). Also available in other flow options. Contact a sales associate for details.

CERTIFICATIONS




WATERWORKS


HENRY

HNKM15


Henry One Hole Gooseneck Kitchen Faucet, Metal Lever Handle




TOP VIEW SCALE: $1\frac{1}{2}$ "=1'-0"

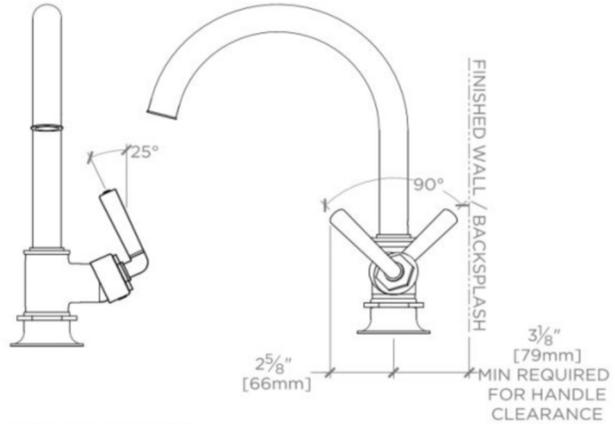

HANDLE OPERATION

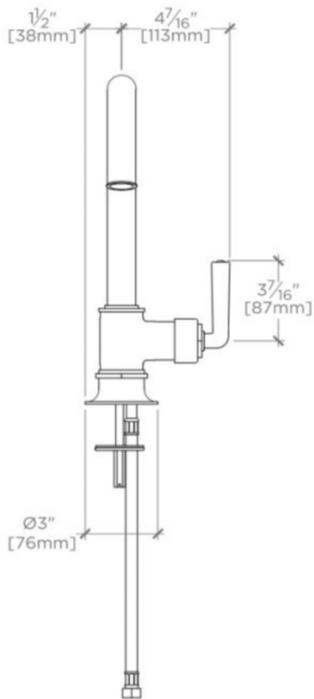

FRONT VIEW SCALE: $1\frac{1}{2}$ "=1'-0"

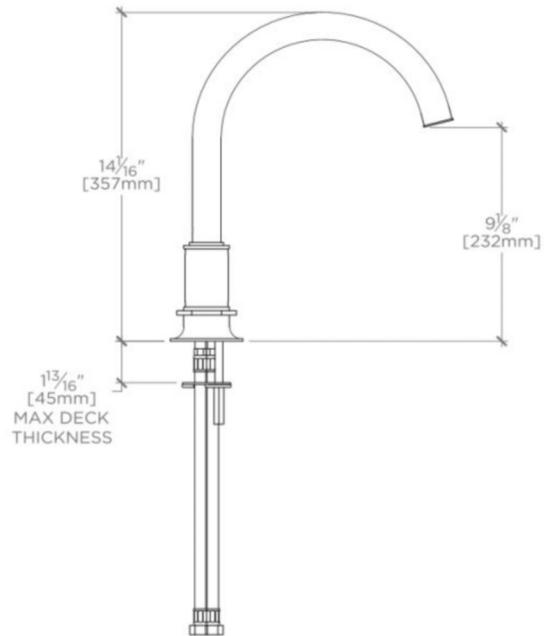

SIDE VIEW

SCALE: $1\frac{1}{2}$ "=1'-0"