BOND

BXT27C

Bond Union Series Deck Mounted Exposed Tub Filler with Handshower and Guilloche Link Lever Handles



INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

TECHNICAL DETAILS

ADA Compliance: No Deck Thickness Maximum: 2" Deck Thickness Minimum: 1/4" Diameter Of Legs Tubes: 1 1/4" Fittings Hole Diameter: 1 3/8" Handle Spread Maximum: 8" Handle Spread Minimum: 8" Handle Turn Angle: Quarter Turn Handshower Spray Hose Length: 59" Inlet Connection Size: 3/4" Inlet Connection Type: Male NPT Inlet Supply Spread Maximum: 12 1/2" Inlet Supply Spread Minimum: 12 1/2" Integrated Diverter: Y Number Of Holes: Two Hole Primary Material: Brass Spout Swivel: N . Spray Included In Unit: Y Valve Material: Ceramic Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

CODES & STANDARDS

PRODUCT FEATURES

Lever Handles

Diverter handle allows bather to move water from spout to handshower. Handshower features 2-1/8" head with rubber nozzles. Features Guilloche Link Pattern Handle

Stocked in Nickel and Brass

Unrestricted flow for tub spout. Handshower available in 1.75gpm (6.6L/min) flow rate


CERTIFICATIONS



PRODUCT (NOTES)

BOND

Bond Union Series Deck Mounted Exposed Tub Filler with Handshower and Guilloche Link Lever Handles

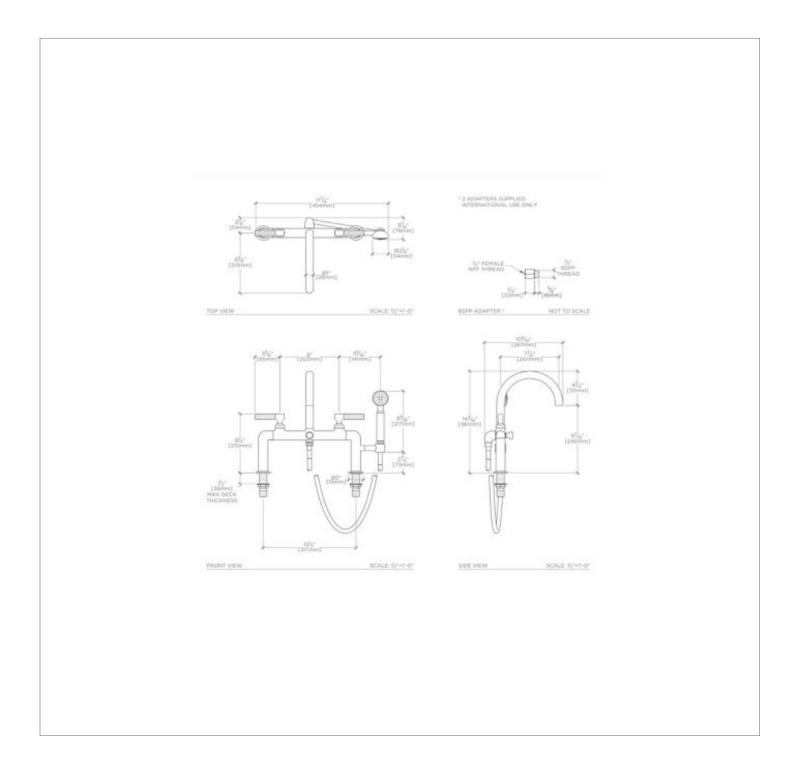

BXT27C