


## R.W. ATLAS

RWXT20

R.W. Atlas Exposed Wall Mounted Tub Filler with Handshower and Wheel Handles

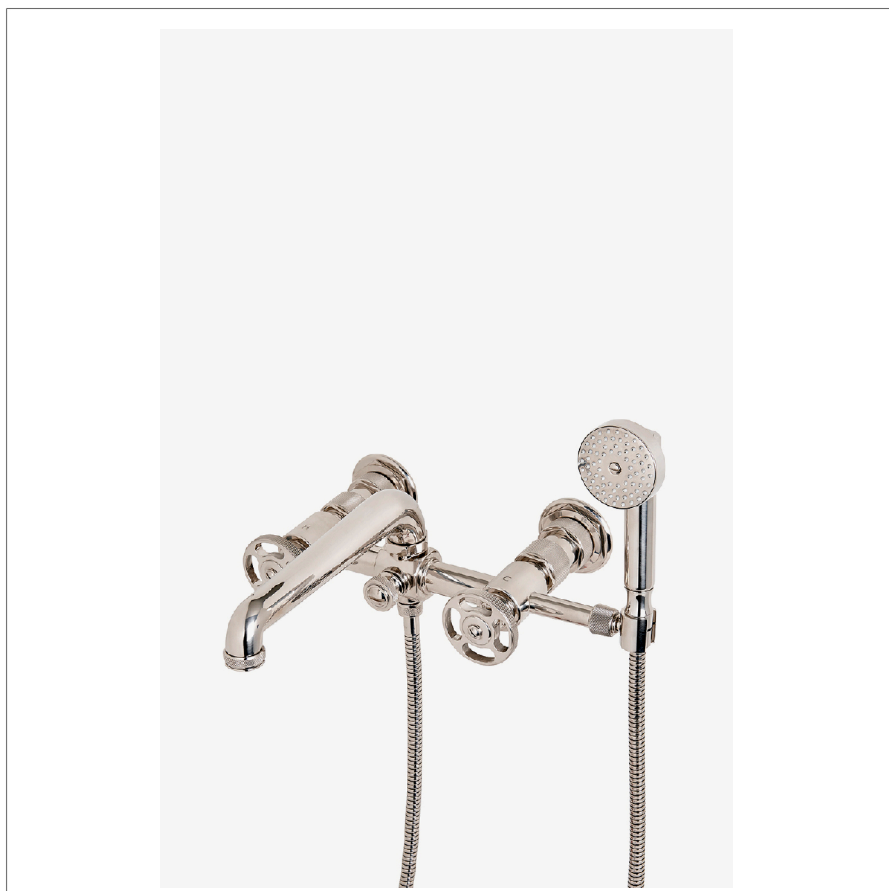

SHOWN IN R.W. ATLAS EXPOSED WALL MOUNTED TUB FILLER WITH HANDSHOWER AND WHEEL HANDLES | RWXT20

### TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed Spray  
 Deck Thickness Maximum: 2 1/2"  
 Deck Thickness Minimum: 0"  
 Depth/Width: 14 3/8"  
 Diameter Of Head: 1 7/8"  
 Escutcheon Primary Material: Brass  
 Fittings Hole Diameter: 1 1/8"  
 Flow Restriction Options: 2.5, 2.0, 1.75, 1.5, 0.92  
 Handle Spread Maximum: 8"  
 Handle Spread Minimum: 8"  
 Handle Turn Angle: Quarter Turn  
 Height: 7 11/16"  
 Inlet Connection Size: 3/4"  
 Inlet Connection Type: Female Union Nut  
 Inlet Supply Spread Maximum: 8"  
 Inlet Supply Spread Minimum: 8"  
 Installation Type: Deck Mounted  
 Integrated Diverter: N  
 Integrated Spray: N  
 Length: 12 5/8"  
 Number Of Handles: Two  
 Primary Material: Brass  
 Restricted Maximum Flow Rate: 1.75 gpm  
 Suggested Application: Bath  
 Valve Material: Ceramic  
 Water Pressure Maximum: 85.0 psi  
 Water Pressure Minimum: 20.0 psi  
 Water Pressure Recommended: 45.0 psi

### INSPIRATION

Powerful shapes, genuine materials and unique aesthetic details. The original, impeccable vision of R.W. Atlas pairs American ingenuity with European craftsmanship.

### CODES & STANDARDS

### PRODUCT FEATURES

Includes Wall Unions

A handshower adds a degree of comfort, making it easy to rinse the bath or even a pet.

Unrestricted (spout) water flow of approximately 12 gpm (45 L/min).

Stocked in 2.5gpm (9.5 L/min) and 1.75gpm (6.6 L/min) for handshower. State of California requires 1.75gpm (6.6 L/min) to comply with their water conservation requirements. Other flow options are available to order, contact your sales associate or call 1 (800) 899-6757 for details.

### CERTIFICATIONS

### PRODUCT (NOTES)

## R.W. ATLAS

RWXT20

R.W. Atlas Exposed Wall Mounted Tub Filler with  
Handshower and Wheel Handles

