



ESTB. 1978

WATERWORKS

Magma



Created from the fine-grained lava of an erupting volcano, Magma's handmade tile presents a richness and decidedly modern feel. With unique chemistry, texture and appealing variations in carefully curated color, it elegantly changes the mood of a bath or kitchen.



ESTB. 1978


WATERWORKS

Magma

FIELD TILE



2" X 8"

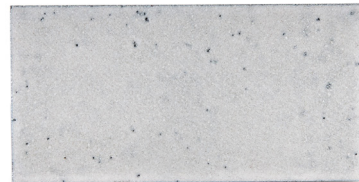

3" X 6"

ARCHITECTURAL ELEMENTS



3/8" X 6" Round Liner



3/4" X 6" Beveled Rail



4" X 8" Standard Base





ESTB. 1978

WATERWORKS


Magma

DECORATIVE MOSAIC



3" Hexagon
Java Blend
(Matte/Crackle)

V5



3" Hexagon
Mariner Blend
(Matte)

V5



3" Hexagon
Nightwatch/Midnight Blend
(Matte)

V5



3" Hexagon
Zinc/Stargazer Blend
(Crackle)

V5



Herringbone
Java Blend
(Matte/Crackle)

V5



Herringbone
Mariner Blend
(Matte)

V5



Herringbone
Nightwatch/Midnight Blend
(Matte)

V5



Herringbone
Zinc/Stargazer Blend
(Crackle)

V5



Brick 1/2" x 2 3/4"
Java Blend
(Matte/Crackle)

V5



Brick 1/2" x 2 3/4"
Mariner Blend
(Matte)

V5



Brick 1/2" x 2 3/4"
Nightwatch/Midnight Blend
(Matte)

V5



Brick 1/2" x 2 3/4"
Zinc/Stargazer Blend
(Crackle)

V5

* See variation chart

** Surface texture is inherent in the material; glazes may crackle




ESTB. 1978

WATERWORKS

Magma

PALETTE

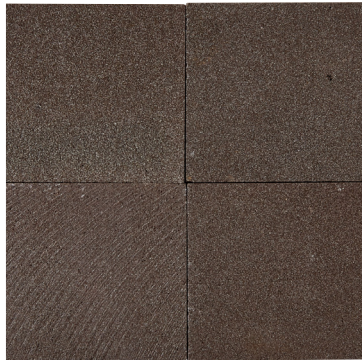


Java
(Matte)

V4




Midnight
(Matte)

V5

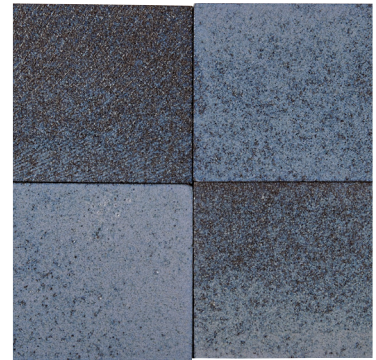


Mariner
(Matte)

V5

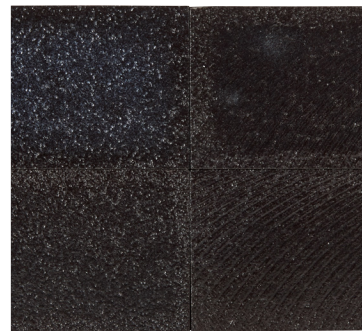

Nightwatch
(Matte)

V4

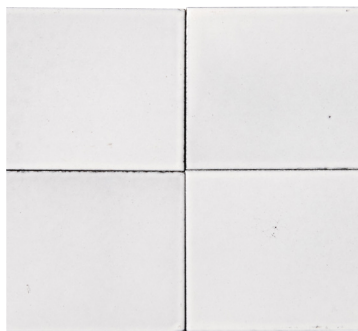

Stargazer
(Crackle)

V4



Zinc
(Crackle)

V5

* All blends have a variation level of 5 (see chart on page 5)


** Surface texture is inherent in the material; glazes may crackle



ESTB. 1978

WATERWORKS

Magma

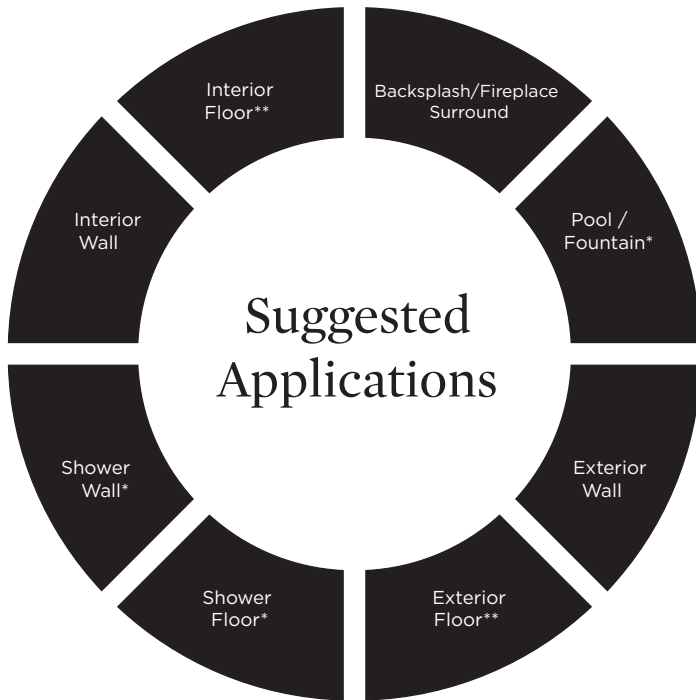

Recommended Use



Not Recommended Use

Application Notes


- * Suitable for use in wet environments, including steam showers, if properly installed, sealed, and maintained
- **Suitable for interior/exterior floors with light traffic ONLY

Installation / Maintenance


- WATERWORKS ASSUMES NO RESPONSIBILITY FOR INSTALLATION
- Installation constitutes acceptance.
- Tile should be installed by a licensed and experienced tile setter.
- Refer to TCNA (Tile Council of North America) or ANSI standards for installation guidelines.
- All tile must be inspected PRIOR to installation.
- Dry lay tile prior to installation to allow for blending of color variation.
- Pre-seal tile PRIOR to grouting to prevent staining. Dark grout can stain crackle tile.
- Waterworks recommends a grouted test panel prior to installation to understand final appearance of grouted materials
- Re-seal tile and grout after installation and maintain regularly.

Variation Level


V1




V2




V3



V4



V5



1. MINIMAL, IF ANY COLOR VARIATION
2. SLIGHT COLOR VARIATION CAN BE EXPECTED
3. A MEDIUM RANGE OF COLOR VARIATION IS TYPICAL; DARKER AND LIGHTER TONES ARE EVIDENT
4. CONSIDERABLE COLOR VARIATION IS TYPICAL; FROM DARKS TO LIGHTS AND SOME TONE CHANGES
5. EXTREME COLOR VARIATION CAN BE EXPECTED - THE RANGE IS OFTEN DIFFERING BUT COMPLEMENTARY

Thickness



*Nominal: +/- 1/8"

Suggested Grout Lines

1/16" - 1/8"