

BOULEVARD

Boulevard 3 1/2" Shower Head, Arm and Flange

BD71SH



SHOWN IN BOULEVARD 3 1/2" SHOWER HEAD, ARM AND FLANGE| BDSH71

TECHNICAL DETAILS

Adjustable versus Fixed Spray: Adjustable Spray
Diameter of Head: 89 mm
Escutcheon Primary Material: Brass
Fittings Hole Diameter: 35 mm
Flow Restriction Options: 2.0, 1.5
Depth / Width: 305 mm
Height: 178 mm
Inlet Connection Size: 1/2"
Inlet Connection Type: Male G/BSPP
Integrated Diverter: N
Length: 102 mm
Pivot: Y
Primary Material: Brass
Restricted Maximum Flow Rate: 9.5 liters/min
Suggested Application: Bath
Water Pressure Maximum: 6.0 bar
Water Pressure Minimum: 1.5 bar
Water Pressure Recommended: 3.0 bar

INSPIRATION

Inspiration from 1930s objects evokes extravagance: a strong silhouette, lavish scale and elegant decoration. Machine and artisan hands yield crisp details and curves.

CODES & STANDARDS

Code # : ASME A112.18.1 / CSA B125.1, IAPMO, State of MA

PRODUCT FEATURES

Brass metal is used for all trim and valve components.

The manufacturing process encompasses casting, turning, forging, hand-fitting and hand polishing.

Solidly sized and generous in scale, decorative elements convey a sense of substance.


Standard flow rate is 2.5gpm (9.5 L/min). Also available in high efficiency flow options. Contact your sales associate or call 1 (800) 899-6757 for details.

WATERWORKS


BOULEVARD

BD71SH


Boulevard 3 1/2" Shower Head, Arm and Flange

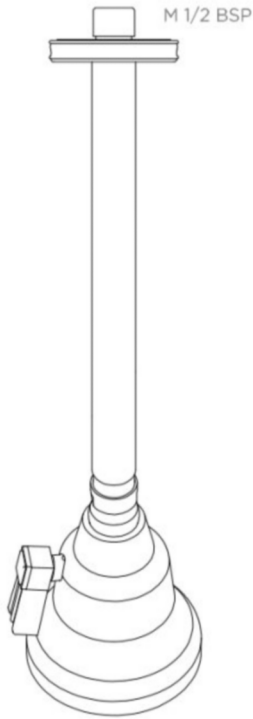


TOP VIEW SCALE: 3"=1'-0"

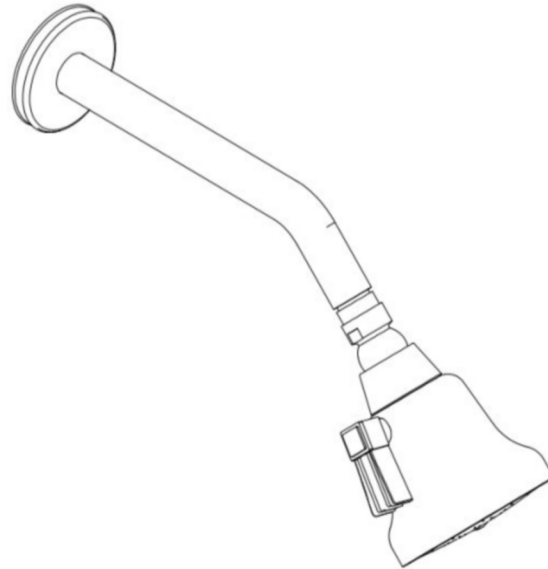

ISO VIEW SCALE: 3"=1'-0"

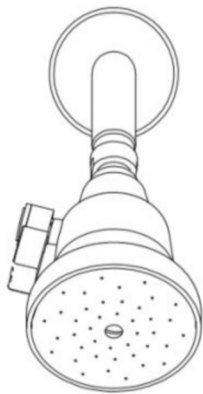

FRONT VIEW SCALE: 3"=1'-0"

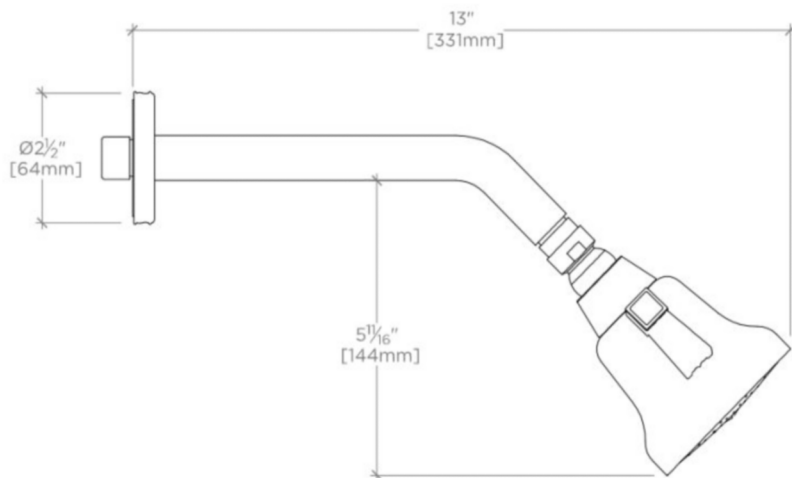

SIDE VIEW SCALE: 3"=1'-0"