
WATERWORKS

UNIVERSAL UTCL06

Universal Transitional 6" Ceiling Mounted Shower Arm with Flange

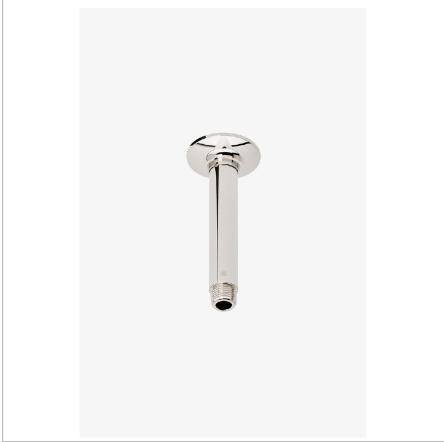

TECHNICAL DETAILS

Fittings Hole Diameter: 1 1/4" Inlet Connection Size: 1/2" Inlet Connection Type: Male NPT Outlet Connection Size: 1/2" Outlet Connection Type: Male NPT Water Pressure Recommended: 45.0 psi

SHOWN IN UNIVERSAL TRANSITIONAL 6" CEILING MOUNTED SHOWER ARM WITH FLANGE | UTCL06

INSPIRATION CODES & STANDARDS

Our Universal collection features timeless designs complementing any of our Waterworks. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

PRODUCT FEATURES

Compatible with an assortment of Waterworks showerheads, sold separately

Brass Construction

Includes 6" ceiling mounted shower arm

Stocked in Chrome, Nickel and Brass

CERTIFICATIONS

PRODUCT (NOTES)

UNIVERSAL UTCL06

Universal Transitional 6" Ceiling Mounted Shower Arm with Flange

