

## UNIVERSAL

## USH308

Universal Transitional 8" Rain Showerhead



SHOWN IN UNIVERSAL TRANSITIONAL 8" RAIN SHOWERHEAD | USH308

### TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed Spray  
Flow Restriction Options: 1.5, 1.75, 2.0  
Inlet Connection Size: 1/2"  
Inlet Connection Type: Female NPT  
Pivot: Y  
Primary Material: Brass  
Restricted Maximum Flow Rate: 1.75 gpm  
Water Pressure Maximum: 85.0 psi  
Water Pressure Minimum: 20.0 psi  
Water Pressure Recommended: 45.0 psi

### INSPIRATION

Our Universal collection features timeless designs complementing any of our Waterworks. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

### CODES & STANDARDS

USH308X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

### PRODUCT FEATURES

Compatible with an assortment of Waterworks arms and flanges, sold separately

Swiveling 8" rain showerhead

91 easy clean rubber nozzles prevent calcium buildup

Stocked in Brass, Chrome and Nickel


Rain showerhead available in 1.75gpm (6.6L/min) flow rate

### CERTIFICATIONS




### PRODUCT (NOTES)


Universal Transitional 8" Rain Showerhead

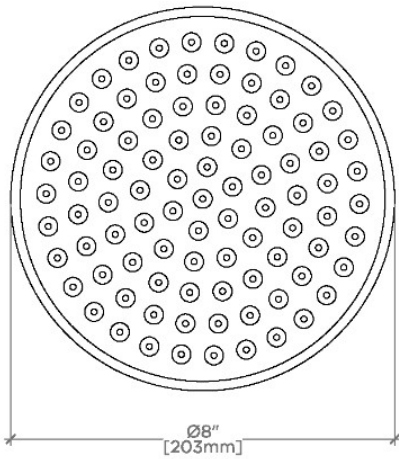

CEILING VIEW SCALE: 3"=1'-0"

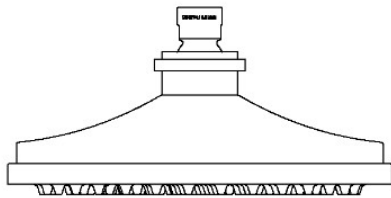

FRONT VIEW SCALE: 3"=1'-0"

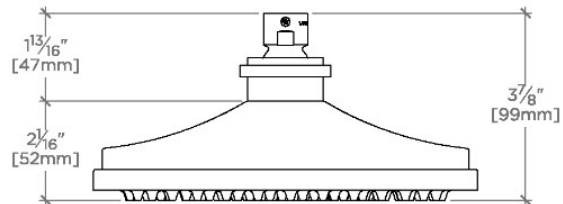

SIDE VIEW SCALE: 3"=1'-0"