
AERO AE88TF

Aero Low Profile Concealed Tub Filler With Handshower and Metal Cross Handles

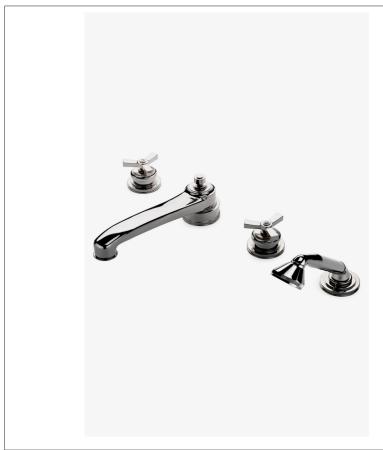

SHOWN IN AERO LOW PROFILE CONCEALED TUB FILLER WITH HANDSHOWER AND METAL CROSS HANDLES AETF88

## **TECHNICAL DETAILS**

ADA Compliance: Yes Adjustable versus Fixed Spray: Fixed Spray Deck Thickness Maximum: 41 mm Deck Thickness Minimum: 0 mm Diameter of Head: 51 mm Escutcheon Primary Material: Brass Fittings Hole Diameter: 35 mm Flow Restriction Options: 2.0, 1.75, 1.5, 0.92 Handle Spread Maximum: 305 mm Handle Spread Minimum: 254 mm Handle Turn Angle: Quarter Turn Handshower / Spray Hose Length: 2.0 m Depth / Width: 305 mm Height: 152 mm Inlet Connection Size: 3/4" Inlet Connection Type: Male G/BSPP Inlet Supply Spread Maximum: 305 mm Inlet Supply Spread Minimum: 254 mm Installation Type: Deck Mounted Integrated Diverter: N Length: 533 mm Number of Handles: Two Number of Holes: Four Hole Pivot: N Primary Material: Brass Restricted Maximum Flow Rate: 9.5 liters/min Spout Swivel: N Suggested Application: Bath Valve Material: ceramic Water Pressure Maximum: 5.5 bar Water Pressure Minimum: 1.5 bar Water Pressure Recommended: 3.0 bar

## **INSPIRATION**

Inspired by the stepped detail of 19th century telescopes, Aero is a combination of historical reference with a contemporary temperament. The result is original and modern, bringing a look of updated elegance.

## **CODES & STANDARDS**

Code #: ASME A112.18.1, CSA B125, IAPMO, State of MA

## **PRODUCT FEATURES**

Metal cross handles

Lift knob located on top of spout to divert water between tub and handshower

Features signature stepped and gadrooned details on escutcheon

Stocked in Chrome and Nickel

Unrestricted flow for tub spout. Stocked in 2.5gpm (9.5L/min) flow rate for handshower. Alternate flow regulation of 1.75gpm (6.6/min) also availble as special order

AERO AE88TF

Aero Low Profile Concealed Tub Filler With Handshower and Metal Cross Handles

